



晶采光電科技股份有限公司
AMPIRE CO., LTD.

SPECIFICATIONS FOR LCD MODULE

CUSTOMER	
CUSTOMER PART NO.	
AMPIRE PART NO.	AM-1024600Y3TZQW-A5H
APPROVED BY	
DATE	

☐ Approved For Specifications

☐ Approved For Specifications & Sample

AMPIRE CO., LTD.

**4F., No.116, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 221,
Taiwan (R.O.C.)**

22181 新北市 汐止區 新台五路一段 116 號 4 樓(東方科學園區 A 棟)

TEL:886-2-26967269 , FAX:886-2-26967196 or 26967270

APPROVED BY	CHECKED BY	ORGANIZED BY

RECORD OF REVISION

Revision Date	Page	Contents	Editor
2019/10/01	--	New Release	Lawlite
2019/10/30	4,16	Update Temperature Operation	Lawlite

1. Features

This module is a color active matrix thin film transistor (TFT) liquid crystal display (LCD) that uses amorphous silicon TFT as a switching device. This TFT LCD has a 9.0 (16:9) inch diagonally measured active display area with WSVGA (1024 horizontal by 600 vertical pixels) resolution.

- (1) 9 (16:9 diagonal) inch configurations.
- (2) 16.2M color by 6bit + FRC.
- (3) ROHS design.

2. PHYSICAL SPECIFICATIONS

Item	Specifications	unit
LCD size	9 inch (Diagonal)	
Resolution	1024 (RGB) x 600	dot
Dot pitch	0.192(W) x 0.19025(H)	mm
Active area	196.6(W) x 114.1(H)	mm
Module size	211.1(W) x 126.5(H) x 10.05(D)	mm
Display Mode	Normally Black	
Color arrangement	RGB Vertical stripe	
interface	LVDS	
Brightness	1200	cd/m ²

3. ABSOLUTE MAX. RATINGS

Item	Symbol	Values		UNIT	Note
		Min.	Max.		
Power Consumption	Logic System	--	0.7	W	
Operation temperature	TOP	-20	80	°C	
Storage temperature	TST	-30	80	°C	

4. ELECTRICAL CHARACTERISTICS

4-1 Typical Operation Conditions

Typical operating conditions (GND=0V)

Item		Symbol	Min.	Typ.	Max.	Unit	Remark
Power supply		V_{DD}	3.0	3.3	3.6	V	
Input Voltage for logic	H Level	V_{IH}	$0.7 V_{DD}$	--	V_{DD}	V	Note 1
	L Level	V_{IL}	0	--	$0.3 V_{DD}$	V	
Power Supply current		I_{DD}		T.B.D		mA	Note 2


Note1: SELB , U/D, L/R

Note2: TFT power supply current.

$V_{DD}=3.0V$, $f_v=60Hz$, $T_a=25^{\circ}C$, Display pattern: All Black

Switching Characteristics of LVDS Receiver

Item	Symbol	Min.	Typ.	Max.	Unit	Condition
Differential Input High Threshold	V_{TH}	--	--	100	mV	$V_{CM}=1.2V$
Differential Input Low Threshold	V_{TL}	-100	--	--	mV	
Input current	I_{IN}	-10	--	+10	μA	
Differential input Voltage	$ VID $	0.2	--	0.6	V	
Common Mode Voltage Offset	V_{CM}	$\frac{ VID }{2}$	1.25	$2.4 - \frac{ VID }{2}$	V	

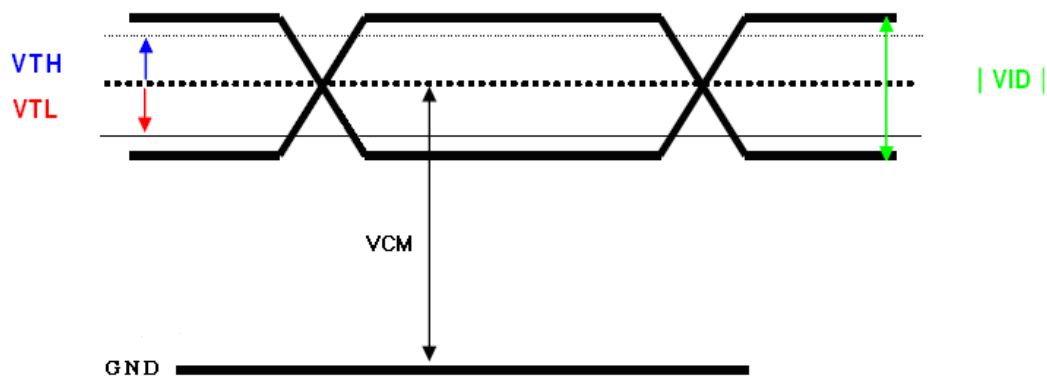

4-2 LED Driving Conditions


Item	Symbol	Values			Unit	Note
		Min.	Typ.	Max.		
LED Driver Power Voltage	V_{LED}	11.75	12	12.25	V	
LED Driver Current Consumption	I_{LED}	--	700	--	mA	$V_{LED}=12V$ $ADJ=5V$ (duty 100%)
ADJ Input Voltage	V_{ADJ}	1.2	--	5	V	duty=100% Note(3)
ADJ Frequency	F_{ADJ}	100	200	500	Hz	
ADJ Duty cycle		5		100	%	
LED forward Current	I_{AK}	--	240	--	mA	$T_a=25^{\circ}C$
LED Life Time			50		kHr	

Note (1) The constant current source is needed for white LED back-light driving.


Note (2) Brightness to be decreased to 50% of the initial value. $T_a=25^{\circ}C$

Note (3) V_{LEDADJ} is PWM signal input. It is for brightness control.

Please use ADJ to reduce the I_{LED} , when operated over $40^{\circ}C$ ambient temperature.

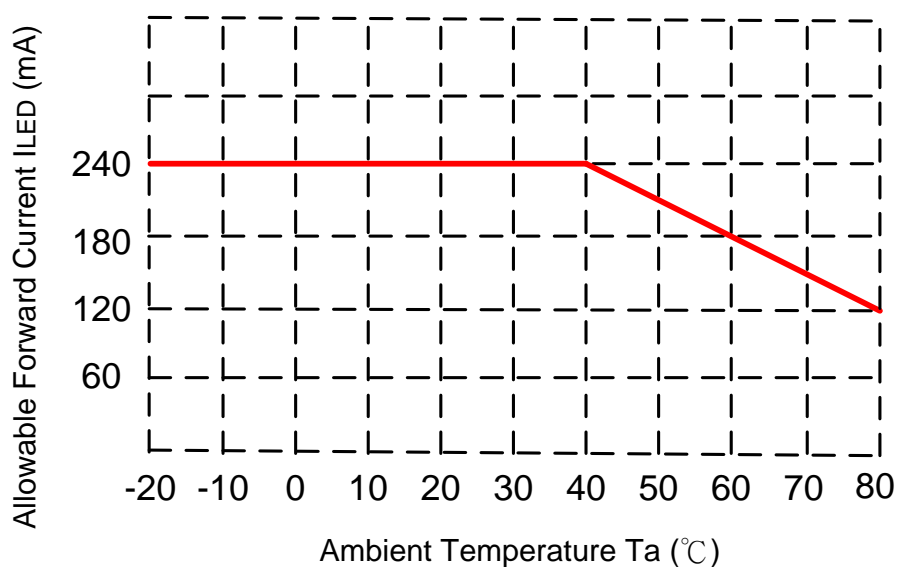

4-3 Power Sequence

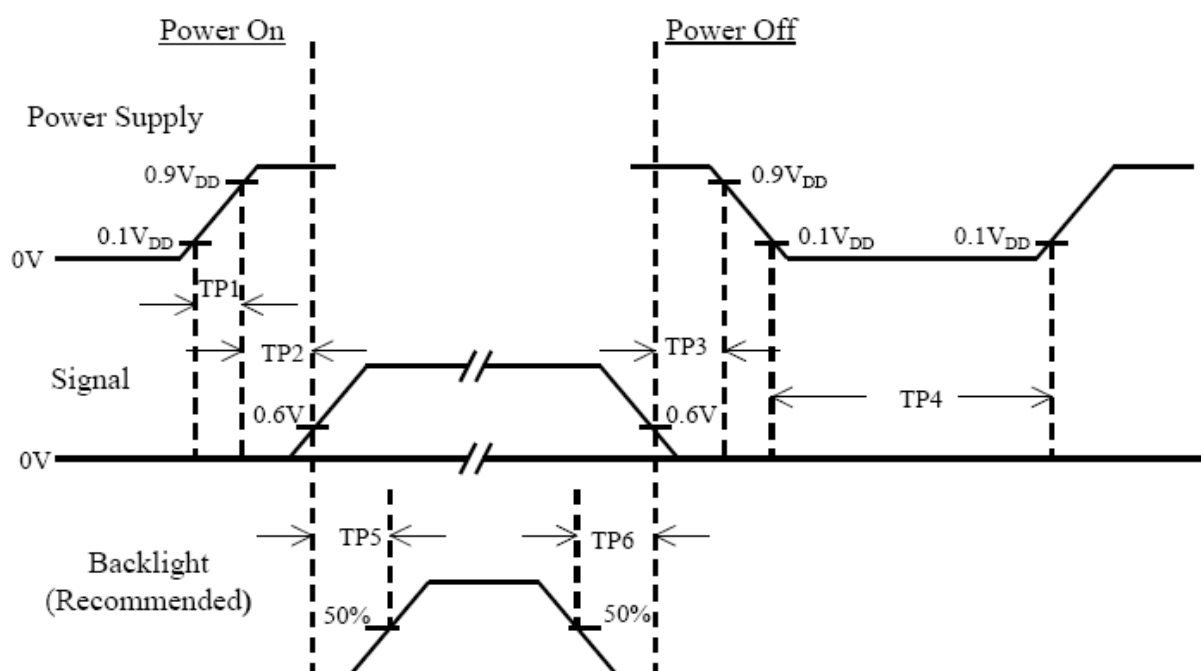

Item	Min.	Typ.	Max.	Unit	Remark
TP1	0.5	--	10	msec	
TP2	0	--	50	msec	
TP3	0	--	50	msec	
TP4	500	--	--	msec	
TP5	200	--	--	msec	
TP6	200	--	--	msec	

Note :

- (1) The supply voltage of the external system for the module input should be the same as the definition of VDD.
- (2) Apply the lamp voltage within the LCD operation range. When the back-light turns on before the LCD operation or the LCD turns off before the back-light turns off, the display may momentarily become white.
- (3) In case of VDD = off level, please keep the level of input signal on the low or keep a high impedance.
- (4) TP4 should be measured after the module has been fully discharged between power off and on period.
- (5) Interface signal shall not be kept at high impedance when the power is on.


5. Optical Specifications

Item	Symbol	Condition	Values			Unit	Note
			Min.	Typ.	Max.		
Viewing angle (CR \geq 10)	θ L	$\Phi = 180^\circ$ (9 o'clock)	80	85	--	degree	Note1
	θ R	$\Phi = 0^\circ$ (3 o'clock)	80	85	--		
	θ T	$\Phi = 90^\circ$ (12 o'clock)	80	85	--		
	θ B	$\Phi = 270^\circ$ (6 o'clock)	80	85	--		
Response time	TON	Normal $\theta = \Phi = 0^\circ$	--	17	24	msec	Note3
	TOFF		--	18	26	msec	
Contrast ratio	CR		640	800	--	--	Note4
Color chromaticity	WX		0.250	0.300	0.350	--	
	WY		0.270	0.320	0.370	--	
	RX		0.541	0.591	0.641		
	RY		0.298	0.348	0.398		
	GX		0.253	0.303	0.353		
	GY		0.524	0.574	0.624		
	BX		0.104	0.154	0.204		
	BY		0.042	0.092	0.142		
Luminance	L		960	1200	--	cd/m2	

Test Conditions:


1. VDD = 3.3V, $I_{LED} = 240mA$ (Backlight current), the ambient temperature is 25°C.
2. The test systems refer to Note 2.

Note 1 : Definition of viewing angle range

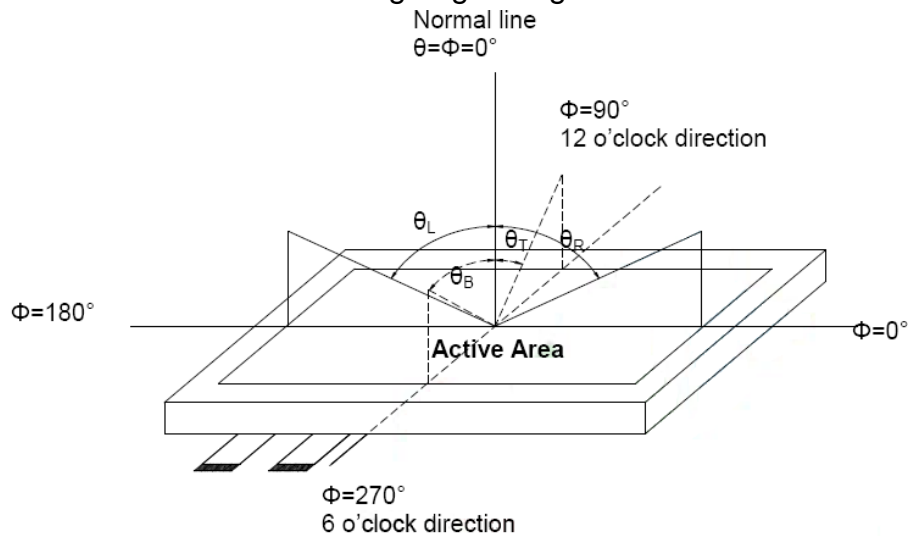


Note 2 : Definition of optical measurement system.

The optical characteristics should be measured in dark room. After 30 minutes operation, the optical properties are measured at the center point of the LCD screen. (Response time is measured by Photo detector TOPCON BM-7, other items are measured by BM-5A/Field of view : 1° / Height : 500mm.)

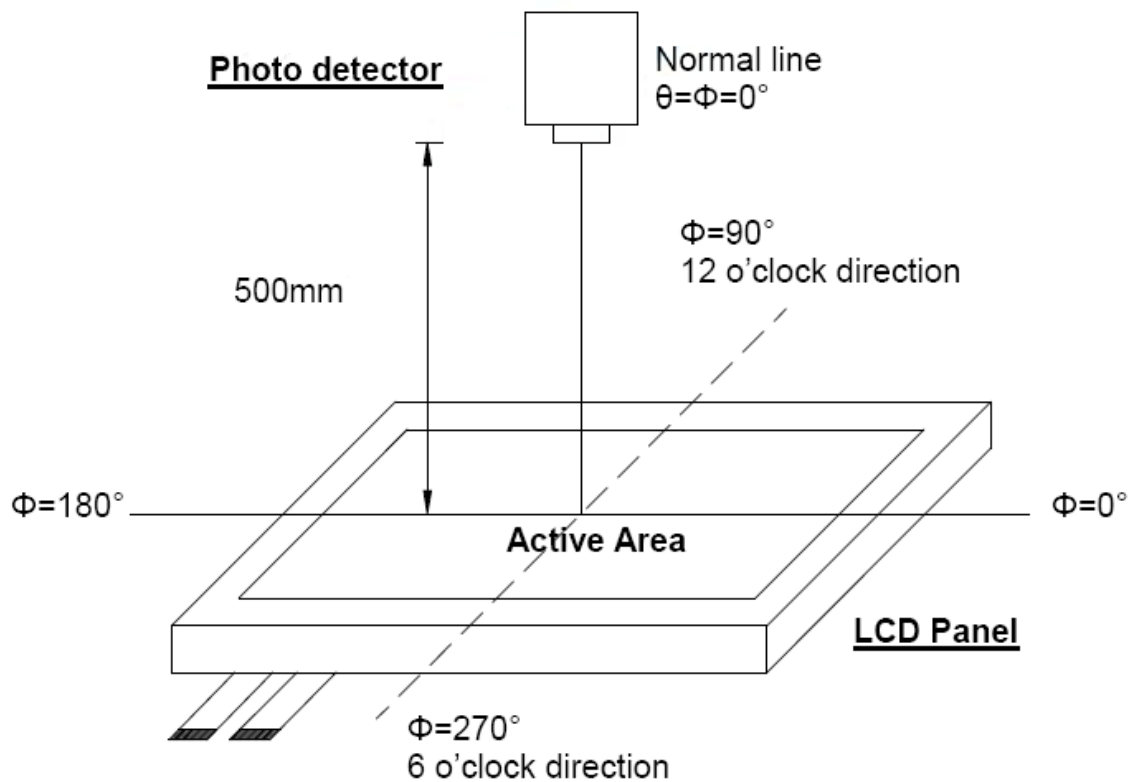

Note 3 : Definition of Response time

The response time is defined as the LCD optical switching time interval between “White” state and “Black” state. Rise time (T_{ON}) is the time between photo detector output intensity changed from 90% to 10%. And fall time (T_{OFF}) is the time between photo detector output intensity changed from 10% to 90%.

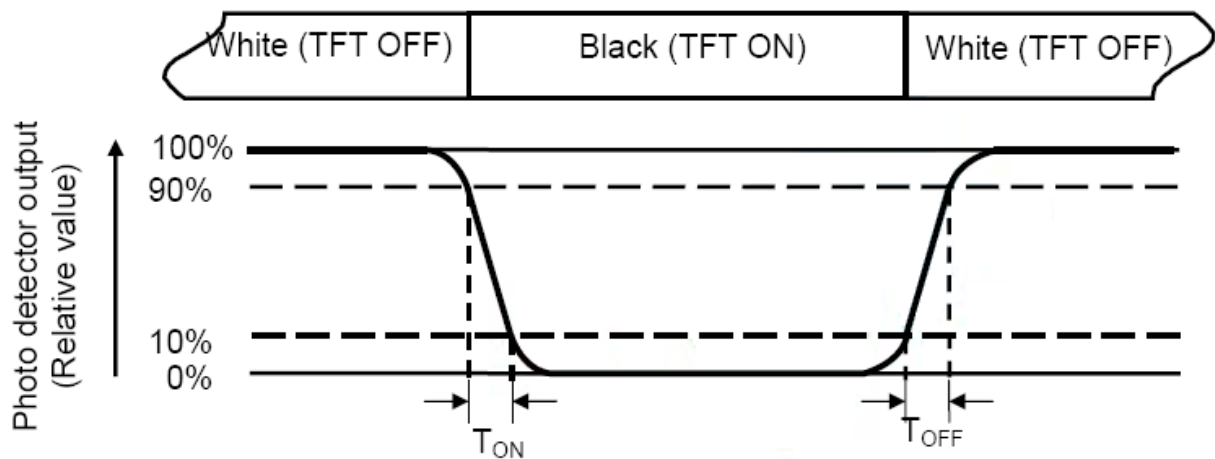

Note 4 : Definition of contrast ratio

$$\text{Contrast ratio (CR)} = \frac{\text{Luminance measured when LCD on the "White" state}}{\text{Luminance measured when LCD on the "Black" state}}$$

Note 5 : Definition of color chromaticity (CIE1931)

Color coordinated measured at center point of LCD.

Note 6 : All input terminals LCD panel must be ground when measuring the center area of the panel.

6. INTERFACE

Electrical Interface Connection


CN1(Input signal): CSTAR DS100-430-H23 (equivalent JAE FI-XB30SSRL-HF16)

Pin No.	Symbol	Description	Note
1	GND	Ground	
2	VDD	3.3V Power	
3	VDD	3.3V Power	
4	NC	No connection	
5	ADJ	LED PWM	Note*
6	NC	No connection	
7	NC	No connection	
8	RXIN0-	LVDS Signal - channel0-	
9	RXIN0+	LVDS Signal+ channel0+	
10	GND	Ground	
11	RXIN1-	Data Input channel1-	
12	RXIN1+	Data Input channel1+	
13	GND	Ground	
14	RXIN2-	Data Input channel2-	
15	RXIN2+	Data Input channel2+	
16	GND	Ground	
17	RXCLKIN-	Data Input CLK-	
18	RXCLKIN+	Data Input CLK+	
19	GND	Ground	
20	RXIN3-	Data Input channel3-	
21	RXIN3+	Data Input channel3+	
22	GND	Ground	
23	GND	Ground	
24	VLED	VLED Power +12V	

25	VLED	VLED Power +12V	
26	VLED	VLED Power +12V	
27	SELB	LVDS Interface Select PIN SELB = "0", 24BIT LVDS SELB = "1", 18BIT LVDS	Note3
28	U/D	Vertical inversion	Note2
29	L/R	Horizontal inversion	Note2
30	LED_ON	LED Enable Pin : High→Enable	


[Note]

(1) ADJ can adjust brightness to control Pin. Pulse duty the bigger the brighter.

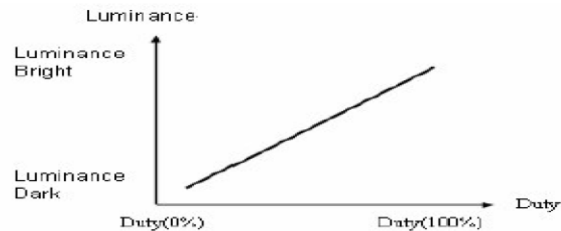

(2) ADJ Signal=0~3.3V · Operation Frequency :

Dimming Range		
PWM Frequency (F)	Duty Cycle (Min.)	Duty Cycle (Max.)
100Hz < F < 500Hz	5%	100%
500Hz < F < 20KHz	10%	100%

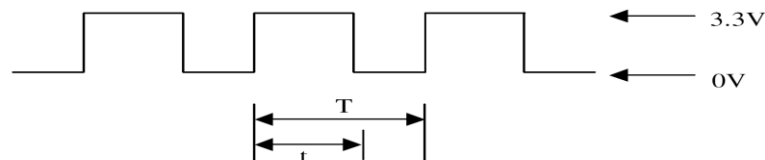

$$\text{Duty Cycle} = t / T * 100\%$$

Note2 : When L/R="0", set right to left scan direction.

When L/R="1", set left to right scan direction.

When U/D="0", set top to bottom scan direction.

When U/D="1", set bottom to top scan direction.

Note3 : If LVDS input data is 6 bits, SELB must be set to High;

If LVDS input data is 8 bits, SELB must be set to Low.

7. TIMING CHARACTERISTICS

7-1 Electrical Characteristics TFT LCD Module

Item	Symbol	Values			UNIT	Note
		Min.	Typ.	Max.		
Supply Voltage	VDD	3.0	3.3	3.6	V	
Input signal voltage	ViH	0.7VDD	--	VDD	V	
	ViL	0	--	0.3VDD	V	
Current of power supply	IDD	--	T.B.D.	--	mA	VDD=3.3V

Switching Characteristics for LVDS Receiver


Item	Symbol	Min.	Typ.	Max.	Unit	Conditions
Differential Input High Threshold	Vth	—	—	100	mV	V _{CM} =1.2V
Differential Input Low Threshold	Vtl	-100	—	—	mV	
Input Current	I _{IN}	-10	—	+10	uA	
Differential input Voltage	V _{ID}	0.1	—	0.6	V	
Common Mode Voltage Offset	V _{CM}	0.7	1.2	1.6	V	

7-3 Timing(DE MODE)


Parameter	Symbol	Value			Unit
		Min.	Typ.	Max.	
DCLK frequency @Frame rate=60hz	fclk	40.8	51.2	67.2	Mhz
Horizontal display area	thd	1024			DCLK
HSYNC period time	th	1114	1344	1400	DCLK
HSYNC blanking	thb+thfp	90	320	376	DCLK
Vertical display area	tvd	600			H
VSYNC period time	tv	610	635	800	H
VSYNC blanking	tvb+tvfp	10	35	200	H

Timing Diagram of Interface Signal (DE mode)


(1) Vertical input timing

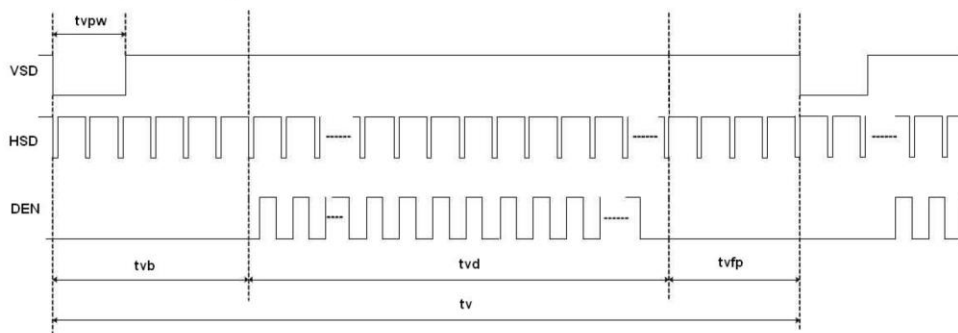


(2) Horizontal Vertical input timing

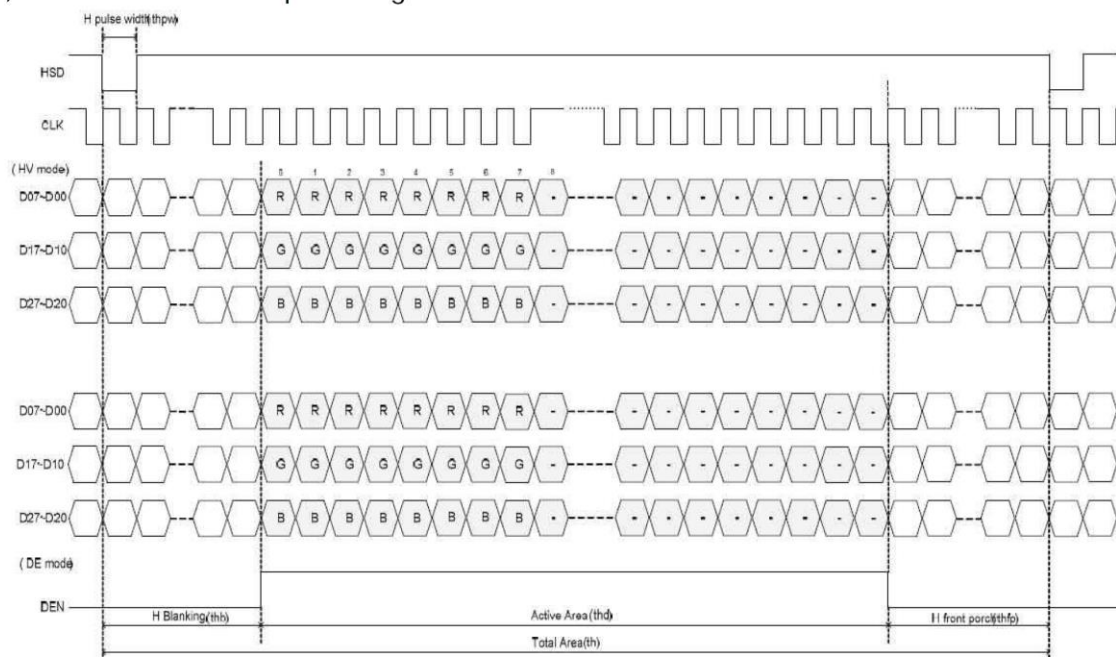

6bit LVDS input

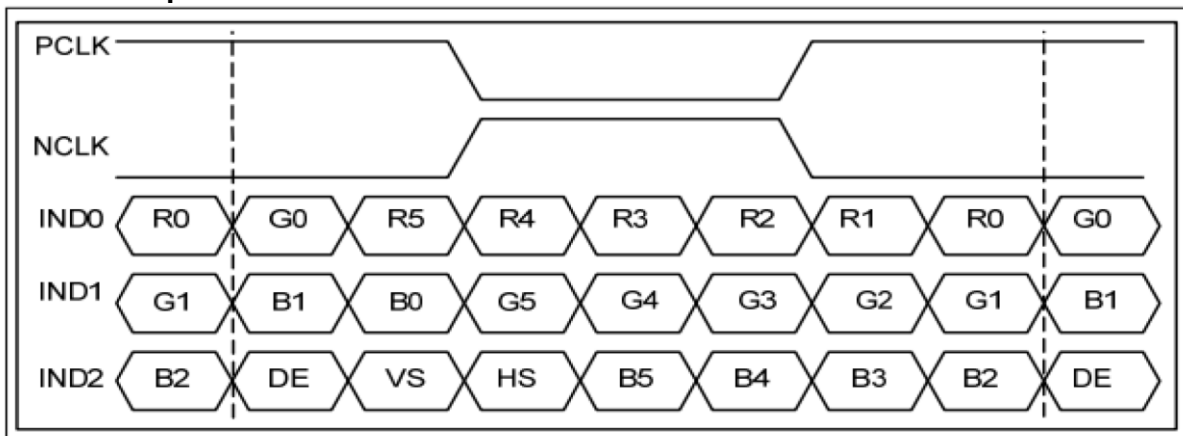

8bit LVDS input

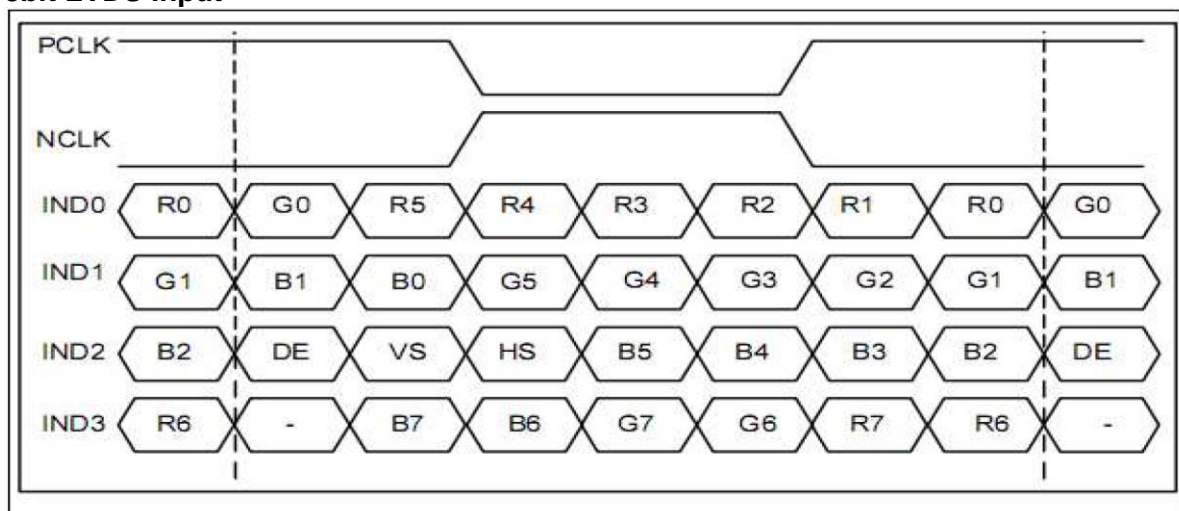

8. RELIABILITY TEST CONDITIONS

Test Item	Test Conditions	Note
High Temperature Operation	80±3°C ,Dry t=240 hrs	
Low Temperature Operation	-20±3°C, Dry t=240 hrs	
High Temperature Storage	80±3°C , Dry t=240 hrs	1,2
Low Temperature Storage	-30±3°C ,Dry t=240 hrs	1,2
Thermal Shock Test	-20°C ~ 25°C ~ 70°C 30 m in. 5 min. 30 min. (1 cycle) Total 100 cycle(Dry)	1,2
Storage Humidity Test	60 °C, Humidity 90%, 240 hrs	1,2

Note(1) Condensation of water is not permitted on the module.

Note(2) The module should be inspected after 1 hour storage in normal conditions (15-35°C, 45-65%RH).

Note(3) The module shouldn't be tested over one condition, and all the tests are independent.

Note(4) All reliability tests should be done without the protective film.

Definitions of life end point :

- Current drain should be smaller than the specific value.
- Function of the module should be maintained.
- Appearance and display quality should not have degraded noticeably.
- Contrast ratio should be greater than 50% of the initial value.

9. USE PRECAUTIONS

9-1 Handling precautions

(1) The polarizing plate may break easily so be careful when handling it. Do not touch, press or rub it with a hard-material tool like tweezers.

(2) Do not touch the polarizing plate surface with bare hands so as not to make it dirty. If the surface or other related part of the polarizing plate is dirty, soak a soft cotton cloth or chamois leather in benzine and wipe off with it. Do not use chemical liquids such as acetone, toluene and isopropyl alcohol. Failure to do so may bring chemical reaction phenomena and deteriorations.

(3) Remove any spit or water immediately. If it is left for hours, the suffered part may deform or decolorize.

(1) If the LCD element breaks and any LC stuff leaks, do not suck or lick it. Also if LC stuff is stuck on your skin or clothing, wash thoroughly with soap and water immediately.

9-2 Installing precautions

(1) The PCB has many ICs that may be damaged easily by static electricity. To prevent breaking by static electricity from the human body and clothing, earth the human body properly using the high resistance and discharge static electricity during the operation. In this case, however, the resistance value should be approx. 1MΩ and the resistance should be placed near the human body rather than the ground surface. When the indoor space is dry, static electricity may occur easily so be careful. We recommend the indoor space should be kept with humidity of 60% or more. When a soldering iron or other similar tool is used for assembly, be sure to earth it.

(2) When installing the module and ICs, do not bend or twist them. Failure to do so may crack LC element and cause circuit failure.

(3) To protect LC element, especially polarizing plate, use a transparent protective plate (e.g., acrylic plate, glass etc) for the product case.

(4) Do not use an adhesive like a both-side adhesive tape to make LCD surface (polarizing plate) and product case stick together. Failure to do so may cause the polarizing plate to peel off

9-3 Storage precautions

(1) Avoid a high temperature and humidity area. Keep the temperature between 0°C and 35°C and also the humidity under 60%.

(2) Choose the dark spaces where the product is not exposed to direct sunlight or fluorescent light.

(3) Store the products as they are put in the boxes provided from us or in the same conditions as we recommend.

9-4 Operating precautions

- (1) Do not boost the applied drive voltage abnormally. Failure to do so may break ICs. When applying power voltage, check the electrical features beforehand and be careful. Always turn off the power to the LC module controller before removing or inserting the LC module input connector. If the input connector is removed or inserted while the power is turned on, the LC module internal circuit may break.
- (2) The display response may be late if the operating temperature is under the normal standard, and the display may be out of order if it is above the normal standard. But this is not a failure; this will be restored if it is within the normal standard.
- (3) The LCD contrast varies depending on the visual angle, ambient temperature, power voltage etc. Obtain the optimum contrast by adjusting the LC drive voltage.
- (4) When carrying out the test, do not take the module out of the low-temperature space suddenly. Failure to do so will cause the module condensing, leading to malfunctions.
- (5) Make certain that each signal noise level is within the standard (L level: 0.2V_{dd} or less and H level: 0.8V_{dd} or more) even if the module has functioned properly. If it is beyond the standard, the module may often malfunction. In addition, always connect the module when making noise level measurements.
- (6) The CMOS ICs are incorporated in the module and the pull-up and pull-down function is not adopted for the input so avoid putting the input signal open while the power is ON.
- (7) The characteristic of the semiconductor element changes when it is exposed to light emissions, therefore ICs on the LCD may malfunction if they receive light emissions. To prevent these malfunctions, design and assemble ICs so that they are shielded from light emissions.
- (8) Crosstalk occurs because of characteristics of the LCD. In general, crosstalk occurs when the regularized display is maintained. Also, crosstalk is affected by the LC drive voltage. Design the contents of the display, considering crosstalk.

9-5 Other

- (1) Do not disassemble or take the LC module into pieces. The LC modules once disassembled or taken into pieces are not the guarantee articles.
- (2) Do not keep the LCD at the same display pattern continually. The residual image will happen and it will damage the LCD. Please use screen saver.
- (3) AMIPRE will provide one year warrantee for all products and three months warrantee for all repairing products.

Date : 2019/10/30



1	GND	16	GND
2	VDD	17	RX1KIN+
3	VDD	18	RX1KIN-
4	NC	19	GND
5	ADJ	20	RX1N3+
6	NC	21	RX1N3-
7	NC	22	GND
8	RX1N0-	23	GND
9	RX1N0+	24	VLED
10	GND	25	VLED
11	RX1N1-	26	VLED
12	RX1N1+	27	SELB
13	RX1N2-	28	U/D
14	RX1N2+	29	L/R
15	RX1N2+	30	LED_ON

1. Unless indicated, Tolerance "±0.3"
2. UV Glue For OLB Protection.
3. CN1:P1.0 30PIN/DS100-430-H23 or Equivalent
4. CN2:P0.5 40PIN H2.0/089H40-000000-C2-R or Equivalent
5. LCD 1024X3(R,G,B)x600>=> 9.0" Digital TFT LCD



WM
QMPIRE
晶采光電科技

