

# 晶采光電科技股份有限公司 AMPIRE CO., LTD.

# SPECIFICATIONS FOR LCD MODULE

CUSTOMER	
CUSTOMER PART NO.	
AMPIRE PART NO.	AG-320240A4FIQW-06H-B(M)(R)
APPROVED BY	
DATE	

☐ Preliminary Specification

**☑** Formal Specification

**AMPIRE CO., LTD.** 

4F., No.116, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City221, Taiwan (R.O.C.)

新北市汐止區新台五路一段 116號 4樓(東方科學園區 A棟)

TEL:886-2-26967269 , FAX:886-2-26967196 or 26967270

Approved by	Checked by	Organized by
Patrick	Mark	Tank

<sup>\*</sup>This specification is subject to change without notice.

Date: 2021/05/06 AMPIRE CO., LTD. 1

# RECORD OF REVISION

Revision Date	Page	Contents	Editor
2021/05/06	-	New Release	Tank

#### **FEATURES** 1

- (1) Display Format: 320 × 240 dot-matrix, 1/240 duty.
- (2) Construction: LCD, Bezel, Edge white LED backlight, and PCB.
- (3) Display Type: New FSTN LCD, Transflective Type, 6 o'clock view.
- (4) Controller: RA8835AP3N-N; 32K SRAM
- (5) Power: Beside +5V for logic circuit, -20V is needed for LCD driving
- (6) Extended temperature type.
- (7) ROHS compliant.

Date: 2021/05/06

(8) Modify the LED back-light design. The replacement will use new light-guide and new LED light bar. The optical and electronic features are compliant to the spec.



## 2 MECHANICAL DATA

Date: 2021/05/06

Parameter	Stand Value	Unit
Dot Size	0.345(W) × 0.345(H)	mm
Dot Pitch	0.36(W) × 0.36(H)	mm
Viewing Area	122.0(W) × 92.0(H)	mm
Module Size	165.0(W) × 109.0(H) × 13.1 max (T)	mm

# **3 ABSOLUTE MAXIMUM RATINGS**

Para	meter	Symbol	Min	Max	Unit
Logic Circuit S	Supply Voltage	VDD-VSS	-0.3	7.0	V
LCD Drivi	ng Voltage	VDD-VO	-0.3	26.0	V
Input '	Voltage	VI	-0.3	VDD+0.3	V
Extended temp.	Operating Temp.	Тор	-20	70	°C
Туре	Storage Temp.	Tstg	-30	80	°C


# 4 ELECTRO-OPTICAL CHARACTERISTICS

Parameter	Symbol	Condition	Min	Тур.	Max	Unit	Note
		Electron	ic Charac	teristics			
Logic Circuit Supply Voltage	VDD-VSS		3.3	5.0	5.5	V	
LCD Driving Voltage	VDD-VO	25°C	20.5	21.6	22.7	V	
Input Voltage	VIH		0.7*VDD		VDD	V	
	VIL		VSS		0.3*VDD	٧	
Logic Supply Current	IDD	VDD = 5V		T.B.D		mA	
		Optica	l Characte	eristics			
Contrast	CR	FSTN Type	1	3.3	-		Note 1
Rise Time	tr	25°C		135	250	ms	Note 2
Fall Time	tf	25°C		245	350	ms	
Viewing Angle	θf	25°C &		29			Note 3
Range	θЬ	CR≥2		30		Deg.	
	θΙ			28			
	θг			27			
Frame Frequency	FF	25°C		70		Hz	


#### (NOTE 1) Contrast Ratio:

CR = (Brightness in OFF state) / (Brightness in ON state)

# (NOTE 2) Response Time:

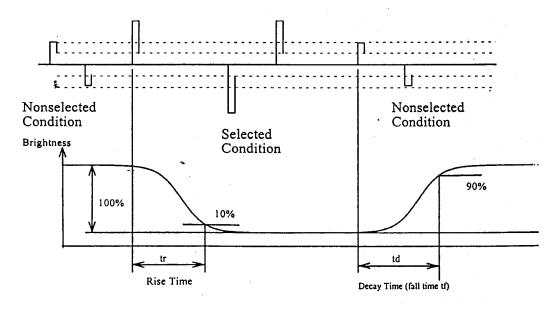

# (NOTE 3) Viewing Angle:

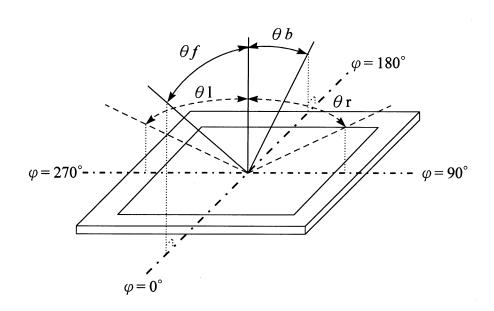

# 4.1 LED Back-light Electrical Specification

	White LED Back-light Characteristics										
Parameter	Symbol	Condition	Min	Тур.	Max	Unit	Note				
Forward Voltage	VF			3.2	3.5	V	Supply Voltage between A&K Note 5				
Forward Current	IF			90	120	mA	Note 4 & 7				
LCM Luminou	LCM Luminous intensity		32	40		cd/m <sup>2</sup>	Note 4				
LED C.I.E	X	IF=90mA	0.26	0.30	0.34		Note 6				
	Υ	IF=90mA	0.27	0.31	0.35						

Note 4: Luminous intensity is decided by forward current of White LED.


Note 5: White LEDs are with voltage tolerance

Note 6: White LEDs are with color tolerance


LED Dice number = A O-


Brightness Enhance

Note 7: One LED current diagram

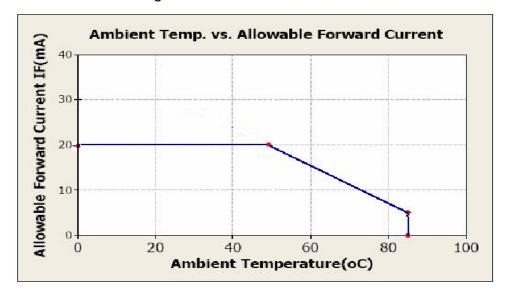

## 5 BLOCK DIAGRAM & POWER SUPPLY

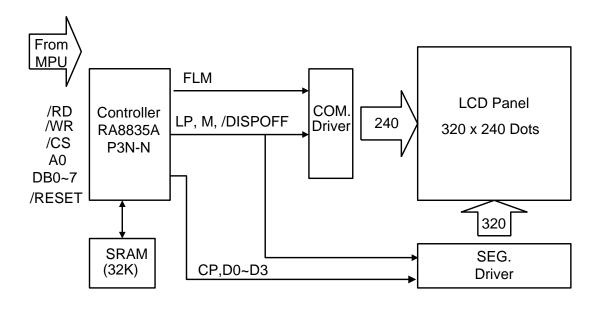

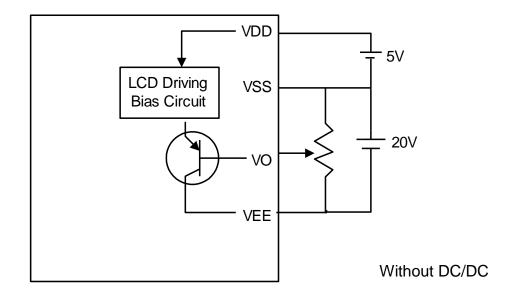


# **6 PIN CONNECTIONS**

NO.	SIGNAL	LEVEL	FUNCTION			
1	/RESET	H/L	Reset Signal			
2	/RD	H/L	80 Series: Read Signal 68 Series: Enable Signal(E)			
3	/WR	H/L	80 Series: Write Signal 68 Series: R/W Signal			
4	/CS	H/L	Chip Select Signal			
5	A0	H/L	Data Type Selection			
6 ~ 13	DB0~DB7	H/L	Data Input(8 bits)			
14	VDD	ı	Power Supply for Logic(+5.0V)			
15	VSS	-	Power Supply(Ground : 0V)			
16	16 VEE -		Negative voltage input (-20V)			
17	17 VO -		Contrast Adjustment Input			
18~24	NC	-	No connection			

# 7 TIMING CHARACTERISTICS

# 7.1 8080 Family Interface Timing

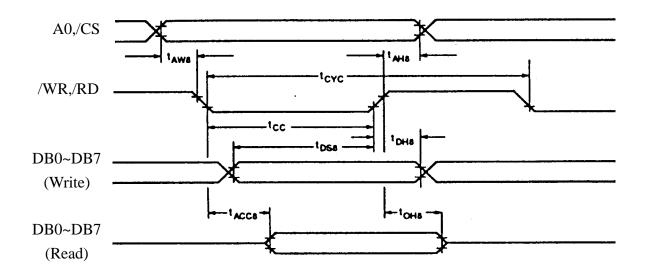

 $Ta = -20 \text{ to } 75^{\circ}C$ 

Signal	Symbol	Parameter	V <sub>DD</sub> = 4.5	to 5.5V	V <sub>DD</sub> = 2.7	to 4.5V	Unit	Condition	
Jigilai	Symbol	raiametei	Min.	Max.	Min.	Max.	Oilit	Condition	
40 00	t <sub>AH8</sub>	Address hold time	10	_	10	_	ns		
A0, CS	t <sub>AW8</sub>	Address setup time	0	_	0	_	ns		
$\overline{WR}$ .	t <sub>CYC8</sub>	System cycle time	note.	_	note.	_	ns		
RD	tcc	Strobe pulse width	120	_	150	_	ns	CL =	
	t <sub>DS8</sub>	Data setup time	120	_	120	_	ns	100pF	
D0 4- D7	t <sub>DH8</sub>	Data hold time	5	_	5	_	ns		
D0 to D7	t <sub>ACC8</sub>	RD access time	_	50	_	80	ns		
	t <sub>OH8</sub>	Output disable time	10	50	10	55	ns		

Note: For memory control and system control commands:


 $t_{CYC8} = 2t_C + t_{CC} + t_{CEA} + 75 > t_{ACV} + 245$ 

For all other commands:

Date: 2021/05/06

 $t_{\rm CYC8} = 4t_{\rm C} + t_{\rm CC} + 30$ 

# 7.2 6800 Family Interface Timing

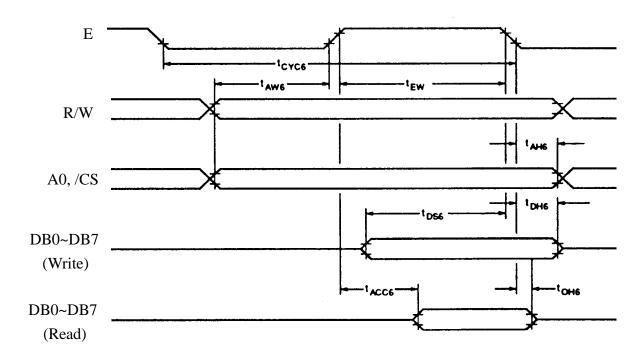

 $Ta = -20 \text{ to } 75^{\circ}C$ 

Signal	Symbol	Parameter	V <sub>DD</sub> = 4.5	5 to 5.5V	V <sub>DD</sub> = 2.7	7 to 4.5V	Unit	Condition	
Signal	Symbol	Farameter	Min.	Max.	Min.	Max.	Oilit	Condition	
40 <u>CC</u>	t <sub>CYC6</sub>	System cycle time	note.	_	note.	_	ns		
A0, <u>CS</u> , R/(W)	t <sub>AW6</sub>	Address setup time	0	_	10	_	ns		
t <sub>AH6</sub>		Address hold time	0	_	0	_	ns		
	t <sub>DS6</sub>	Data setup time	100	_	120	_	ns	CL = 100	
D0 to D7	t <sub>DH6</sub>	Data hold time	0	_	0	_	ns	pF	
D0 t0 D7	t <sub>OH6</sub>	Output disable time	10	50	10	75	ns		
	t <sub>ACC6</sub>	Access time	_	85	_	130	ns		
E	t <sub>EW</sub>	Enable pulse width	120	_	150	_	ns		

Note: For memory control and system control commands:

 $t_{CYC6} = 2t_C + t_{EW} + t_{CEA} + 75 > t_{ACV} + 245$ 

For all other commands:

Date: 2021/05/06

 $t_{CYC6} = 4t_C + t_{EW} + 30$ 

#### 8. INSTRUCTION SET

Class	Command						Code	)					Hex	Command Description	Comman parame	
Class		/RD	/WR	A0	D7	D6	D5	D4	D3	D2	D1	D0	HEX	Command Description	Number of bytes	Sectio n
System	SYSTEM SET	1	0	1	0	1	0	0	0	0	0	0	40	Initialized Device and display	8	8.2.1
Control	SLEEP IN	1	0	1	0	1	0	1	0	0	1	1	53	Enter Standby mode	0	8.2.2
	DISP ON/OFF	1	0	1	0	1	0	1	1	0	0	D		Enable and disable display and display flashing	1	8.3.1
	SCROLL	1	0	1	0	1	0	0	0	1	0	0	44	set Display start address and display regions	10	8.3.2
	CSRFORM	1	0	1	0	1	0	1	1	1	0	1	5D	Set cursor byte	2	8.3.3
Display Control	CGRAM ADDR.	1	0	1	0	1	0	1	1	1	0	0	5C	Set start address of character generator RAM	2	8.3.6
Control	CSRDIR	1	0	1	0	1	0	0	1	1	CD 1	СО	4C to 4F	Set direction of cursor movement	0	8.3.4
	HDOT SCR	1	0	1	0	1	0	1	1		1	0	5A	set horizontal scroll position	1	8.3.7
	OVLAY	1	0	1	0	1	0	1	1	0	1	1	5B	set display overlay format	1	8.3.5
Drawin	CSRW	1	0	1	0	1	0	0	0	1	1	0	46	set cursor address	2	8.4.1
Control	CSRR	1	0	1	0	1	0	0	0	1	1	1	47	read cursor address	2	8.4.2
Memor	MWRITE	1	0	1	0	1	0	0	0	0	1	0	42	write to display memory	=	8.5.1
Control	MREAD	1	0	1	0	1	0	0	0	0	1	1	43	read from display memory	-	8.5.2


#### Note:

- 1. In general, the internal registers of the RA8835 are modified as each command parameter is input. However, the microprocessor does not have to set all the parameters of a command and may send a new command before all parameters have been input. The internal registers for the parameters that have been input will have been changed but the remaining parameter registers are unchanged.
  - 2 bytes parameters( where two bytes are treated as 1 data item) are handled as following:
  - a.CSRW, CSRR: Each byte is processed individually. The microprocessor may read or write just the low byte of the cursor address.
  - b. SYSTEM SET, SCROLL, CGRAM ADR. : Both parameter bytes are processed together. If the command is changed after half of the parameter has been input, the single byte is ignored.
- 2. APL and APH are 2-byte parameters, but are treated as two 1-byte parameters.
- Please refer to RA8835 LCD Controller Data Book for detail.


## 9. Power ON/OFF Sequence

Please maintain the blow sequence when turning on and off the power supply of the module. If /DISPOFF is supplied to the module while internal alter signal for LCD driving (M) is unstable, DC component will be supplied to the LCD panel. This may cause damage the LCD module.

#### POWER ON SEQUENCE

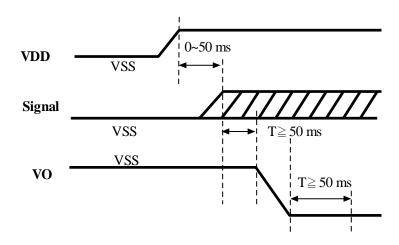

#### POWER OFF SEQUENCE

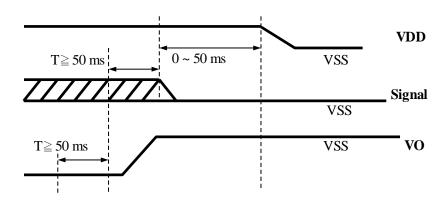

#### **10. JUMPER SETTING**

Item	Option	Jumper Setting	Remark
MPU	80 family (default)	Pin 1,2 short on JP6	
	68 family	Pin 2,3 short on JP6	

#### 11. QUALITY AND RELIABILITY

#### 11.1 TEST CONDITIONS

Tests should be conducted under the following conditions:

Ambient temperature:  $25 \pm 5^{\circ}$ C

Humidity :  $60 \pm 25\%$  RH.

#### 11.2 SAMPLING PLAN

Sampling method shall be in accordance with MIL-STD-105E, level II, normal single sampling plan.

#### 11.3 ACCEPTABLE QUALITY LEVEL

A major defect is defined as one that could cause failure to or materially reduce the usability of the unit for its intended purpose. A minor defect is one that does not materially reduce the usability of the unit for its intended purpose or is an infringement from established standards and has no significant bearing on its effective use or operation.


#### 11.4 APPEARANCE

Date: 2021/05/06

An appearance test should be conducted by human sight at approximately 30 cm distance from the LCD module under flourescent light. The inspection area of LCD panel shall be within the range of following limits.

# 11.5 INSPECTION QUALITY CRITERIA

Item	Description	of de	efect	S		Class of Defects	Acceptable level (%)	
Function	Short circuit or	r Pattei	rn cu	t		Major	0.65	
Dimension	Deviation from	m draw	ings			Major 1.5		
Black spots	Ave . dia . D	area	Α	are	a B	Minor	2.5	
	D≤0.2	D	isreç	garc	l			
	0.2 <d≤0.3< td=""><td>3</td><td></td><td></td><td>4</td><td></td><td colspan="2"></td></d≤0.3<>	3			4			
	0.3 <d≤0.4< td=""><td>2</td><td></td><td></td><td>3</td><td></td><td></td></d≤0.4<>	2			3			
	0.4 <d< td=""><td>0</td><td></td><td></td><td>1</td><td></td><td></td></d<>	0			1			
Black lines	Width W, Length	L	Α		В	Minor	2.5	
	W≤0.03			disregard				
	0.03 <w≤0.05< td=""><td></td><td>3</td><td></td><td>4</td><td></td><td></td></w≤0.05<>		3		4			
	0.05 <w≤0.07 ,="" l≤3<="" td=""><td colspan="2">3.0</td><td></td><td>1</td><td></td><td></td></w≤0.07>	3.0			1			
	See line cr							
Bubbles in	Average diameter D				mm	Minor 2.5		
polarizer	for N = 4 , D >	0.5 for	N =	1				
Color	Rainbow color o	r Newto	on rii	ng.		Minor 2.5		
uniformity								
Glass	Obvious visib	le dam	age.			Minor	2.5	
Scratches								
Contrast	See no	ote 1				Minor	2.5	
ratio	Caara	-1- 0				N dia a m	2.5	
Response time	See no	oie z	Mino			IVIINOF	2.5	
	See no	oto 2				Minor	2.5	
Viewing angle	See no	ne s				IVIIIIVI	2.3	
angle								

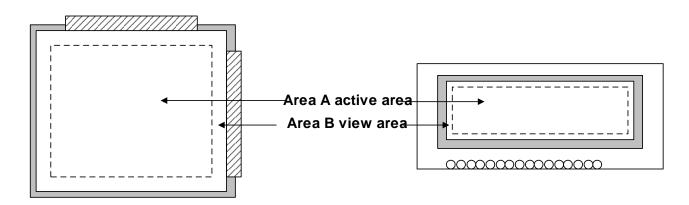

#### 11.6 RELIABILITY

	Test Conditions				
Test Item	Extended Temp. type	Note			
High Temperature Operation	70±3°C , t=96 hrs				
Low Temperature Operation	-20±3°C , t=96 hrs				
High Temperature Storage	80±3°C , t=96 hrs	1,2			
Low Temperature Storage	-30±3°C , t=96 hrs	1,2			
Temperature Cycle	-20°C ~ 25°C ~ 80°C 30 min. 5 min. 30 min. (1 cycle) Total 5 cycle	1,2			
Humidity Test	40 °C, Humidity 90%, 96 hrs	1,2			
Vibration Test (Packing)	Sweep frequency: 10 ~ 55 ~ 10 Hz/1min Amplitude: 0.75mm Test direction: X.Y.Z/3 axis Duration: 30min/each axis	2			

- Note(1) Condensation of water is not permitted on the module.
- Note(2) The module should be inspected after 1 hour storage in normal conditions (15-35°C, 45-65%RH).
- Note(3) The module shouldn't be tested over one condition, and all the tests are independent.
- Note(4) All reliability tests should be done without the protective film.

#### Definitions of life end point:


- Current drain should be smaller than the specific value.
- Function of the module should be maintained.
- Appearance and display quality should not have degraded noticeably.
- Contrast ratio should be greater than 50% of the initial value.

#### 12 HANDLING PRECAUTIONS

- (1) A LCD module is a fragile item and should not be subjected to strong mechanical shocks.
- (2) Avoid applying pressure to the module surface. This will distort the glass and cause a change in color.
- (3) Under no circumstances should the position of the bezel tabs or their shape be modified.
- (4) Do not modify the display PCB in either shape or positioning of components.
- (5) Do not modify or move location of the zebra or heat seal connectors.
- (6) The device should only be soldered to during interfacing. Modification to other areas of the board should not be carried out.
- (7) In the event of LCD breakage and resultant leakage of fluid do not inhale, ingest or make contact with the skin. If contact is made rinse immediately.
- (8) When cleaning the module use a soft damp cloth with a mild solvent, such as Isopropyl or Ethyl alcohol. The use of water, ketone or aromatic is not permitted.
- (9) Prior to initial power up input signals should not be applied.

- (10) Protect the module against static electricity and observe appropriate anti-static precautions.
- (11) AMIPRE will provide one year warrantee for all products and three months warrantee for all repairing products.

# 13 OUTLINE DIMENSION

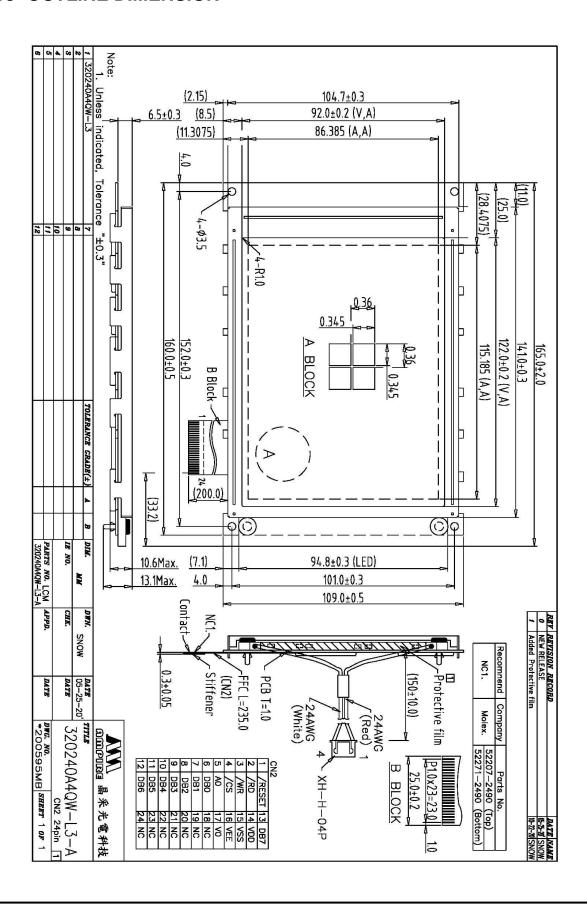

# 14 Packaging

