

晶采光電科技股份有限公司 AMPIRE CO., LTD.

SPECIFICATIONS FOR LCD MODULE

| CUSTOMER | |
|-------------------|----------------------|
| CUSTOMER PART NO. | |
| AMPIRE PART NO. | AM-1024600K5TMQW-00H |
| APPROVED BY | |
| DATE | |

| □Approved For Specifications |
|------------------------------|
|------------------------------|

☐ Approved For Specifications & Sample

AMPIRE CO., LTD.

4F., No.116, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 221, Taiwan (R.O.C.)

22181 新北市 汐止區 新台五路一段 **116** 號 **4** 樓(東方科學園區 A 棟) TEL:886-2-26967269, FAX:886-2-26967196 or 26967270

| APPROVED BY | CHECKED BY | ORGANIZED BY |
|-------------|------------|--------------|
| | | |
| | | |
| | | |

1

Date: 2016/03/28 AMPIRE CO., LTD.

RECORD OF REVISION

| Revision Date | Page | Contents | Editor |
|---------------|------|----------------------------------|--------|
| 2015/05/22 | | New Release | Emil |
| 2015/11/27 | 11 | Correct interface | Simon |
| 2016/03/28 | 7 | Modify the power ON/OFF sequence | Mark |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

1. Features

7 inch Amorphous-TFT-LCD (Thin Film Transistor Liquid Crystal Display) module. This module is composed of a 7" TFT-LCD panel, LED backlight, LED driver unit and power circuit unit.

- (1) Construction: 7" a-Si TFT active matrix, White LED Backlight and power & LED driver.
- (2) Resolution (pixel): 1024(R.G.B) X600
- (3) Number of the Colors: 16M colors (R, G, B 6 bit digital each)
- (4) LCD type: Transmissive, normally White
- (5) Interface: LVDS interface 6bit (default), 8bit by jumper setting.
- (6) Power Supply Voltage: 3.3V for logic voltage, 5V or 12V for LED driver power voltage.
- (7) Viewing Direction: 6 O'clock (Gray Inversion)

2. PHYSICAL SPECIFICATIONS

| Item | Specifications | unit |
|-------------------|---------------------------------|-------------------|
| LCD size | 7 inch (Diagonal) | |
| Resolution | 1024 x 3(RGB) x 600 | dot |
| Dot pitch | 0.15(W) x 0.15(H) | mm |
| Active area | 153.6(W) x 90.0(H) | mm |
| Module size | 165. 5(W) x 104.44(H) x 7.41(D) | mm |
| Surface treatment | Hard Coating, Glare | |
| Color arrangement | RGB-stripe | |
| interface | LVDS | |
| Brightness | 500 | cd/m ² |
| Weight | TBD | g |

3. ABSOLUTE MAX. RATINGS

| Item | Symbol | Valu | ues | UNIT | Note |
|-----------------------|--------|------|------|------------------------|------|
| item | Symbol | Min. | Max. | UNII | Note |
| Dowervaltage | VCC | -0.3 | 4.2 | W | |
| Power voltage | VLED | -0.3 | 14 | V | |
| Operation temperature | Тор | -20 | 70 | $^{\circ}\!\mathbb{C}$ | |
| Storage temperature | Tst | -30 | 80 | $^{\circ}\!\mathbb{C}$ | |

The following values are maximum operation conditions , If exceeded , it may cause faulty operation or damage

.

Date: 2016/03/28 AMPIRE CO., LTD.

4. ELECTRICAL CHARACTERISTICS

4-1 Typical Operation Conditions

| Itom | | Symbol | | Values | | Unit | Domark | | |
|----------------|--------------------------|-----------------|--------------------|--------|--------------------|------|----------|----|----------------------|
| | Item | | MIN | TYP | MAX | Unit | Remark | | |
| Power Voltage | | V _{CC} | 3.0 | 3.3 | 3.6 | V | Note 1,2 | | |
| Power Co | Power Consumption | | Power Consumption | | | 150 | | mA | Note 1,2 VCC=3.3V |
| | Input Voltage | V _{IN} | 0 | - | V _{CC} | V | | | |
| Logic Input | Logic input high voltage | V_{TH} | 0.7V _{CC} | - | V _{CC} | V | Note 3 | | |
| Voltage | Logic input low voltage | V_{TL} | GND | - | 0.3V _{CC} | V | Note 3 | | |

Note 1: Value for Power Board combined panel.

Note 2: VCC setting should match the signals output voltage (refer to Note 3) of customer's system board.

Note 3: LVDS.

Date: 2016/03/28 AMPIRE CO., LTD.

4-2 LED Driving Conditions


| Item | Cymbal | | Values | Unit | Note | |
|-----------------------------|------------------|------|--------|------|------|---------------------------------------|
| item | Symbol | Min. | Тур. | Max. | Unit | Note |
| LED Driver Power Voltage | V_{LED} | 5 | | 12 | V | |
| LED Driver | 1 | 1 | 800 | | mA | VLED=5V ADJ=3.3V (duty 100%) |
| Current Consumption | l _{LED} | | 340 | | mA | VLED=12V ADJ=3.3V (duty 100% |
| ADJ Input Voltage | V_{ADJ} | 3.3 | | 5 | V | duty=100% Note(3) |
| LED voltage | VAK | 14 | | 18 | V | Note(1) |
| LED forward Current | Iak | | 180 | | mA | Ta=25°C |
| LED life time | | - | 30,000 | | Hr | Note(2) |

Note (1) The constant current source is needed for white LED back-light driving. When LCM is operated over 60 deg.C ambient temperature, the I_{LED} of the LED back-light should be adjusted .

Note (2) Brightness to be decreased to 50% of the initial value.

Note (3) VLEDADJ is PWM signal input. It is for brightness control.


There are 3 Groups LED shown as below, VAK =16.5V, IAK =180mA.



Brightess to be decreased to 50% of the initial value.

4-3 Power Sequence

| Itom | Crambal | | Value | Units | Remark | |
|---------------------------------|---------|------|-------|-------|--------|--------|
| Item | Symbol | Min. | Тур. | Max. | Units | Kemark |
| VDD on to signal starting | Tp1 | 5 | - | 50 | ms | |
| Signal starting to backlight on | Tp2 | 150 | - | 1 | ms | |
| Signal off to VDD off | Tp3 | 5 | - | 50 | ms | |
| Backlight off to signal off | Tp4 | 150 | - | - | ms | |

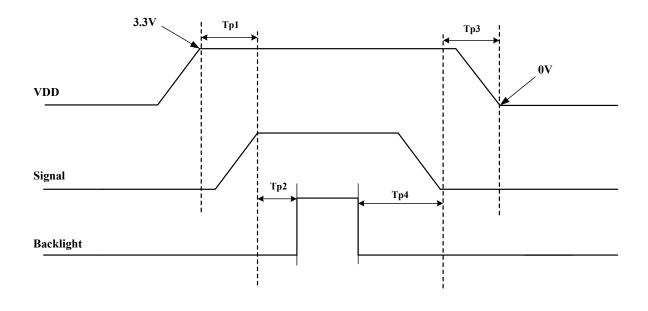

Date: 2016/03/28


5. Optical Specifications

| Itana | Correcte al | Condition | | Values | | 11:4 | Nata | |
|-----------------------|-------------|----------------------------------|-------|--------|-------|-------------------|-------|--|
| Item | Symbol | Condition | Min. | Тур. | Max. | Unit | Note | |
| | θ L | Φ = 180° (9 o'clock) | 65 | 75 | | | | |
| Viewing angle | θR | $\Phi = 0^{\circ}$ (3 o'clock) | 65 | 75 | | 4 | Natad | |
| (CR≥10) | heta T | $\Phi = 90^{\circ}$ (12 o'clock) | 65 | 70 | | degree | Note1 | |
| | θ B | Φ = 270° (6 o'clock) | 65 | 75 | | | | |
| Doonongo timo | TON | | | 20 | 30 | msec | Noto? | |
| Response time | TOFF | | | 20 | 30 | msec | Note3 | |
| Contrast ratio | CR | | 500 | 700 | | | Note4 | |
| Color chromaticity | WX | Normal θ =Φ=0° | 0.280 | 0.330 | 0.380 | | Note5 | |
| | WY | | 0.330 | 0.380 | 0.430 | | Note6 | |
| Luminance | L | | 400 | 500 | | cd/m ² | Note6 | |
| Transmittance | Tr | | | 3.5 | | % | | |

Test Conditions:


- 1. Vled = 12V, I_L = 180mA (Backlight current), the ambient temperature is $25^{\circ}C$.
- 2. The test systems refer to Note 2.

Note 1: Definition of viewing angle range

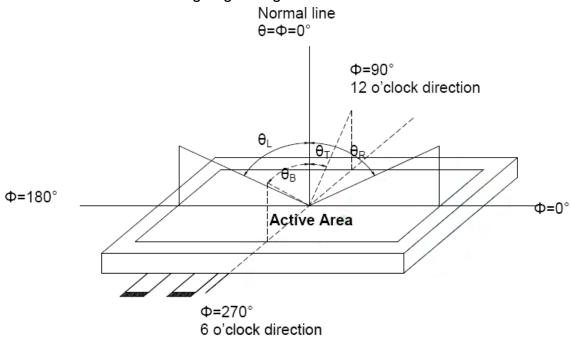


Note 2 : Definition of optical measurement system.

The optical characteristics should be measured in dark room. After 30 minutes operation, the optical properties are measured at the center point of the LCD screen. (Response time is measured by Photo detector TOPCON BM-7, other items are measured by BM-5A/Field of view: 1° / Height: 500mm.)

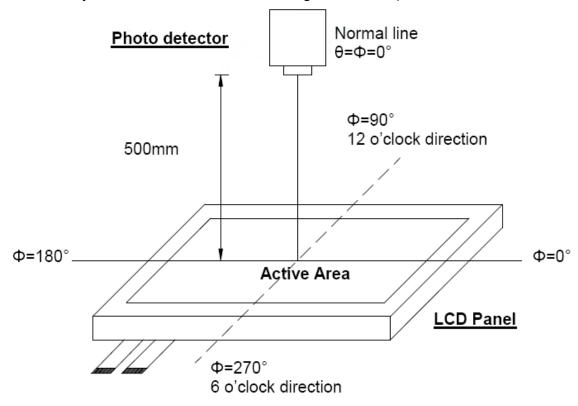

Note 3: Definition of Response time

The response time is defined as the LCD optical switching time interval between "White" state and "Black" state. Rise time (Ton) is the time between photo detector output intensity changed from 90% to 10%. And fall time (Toff) is the time between photo detector output intensity changed from 10% to 90%.

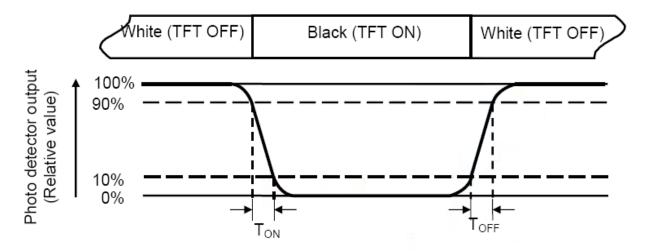

Note 4: Definition of contrast ratio

Contrast ratio (CR) =

Luminance measured when LCD on the "White" state

Luminance measured when LCD on the "Black" state

Note 5 : Definition of color chromaticity (CIE1931)

Color coordinated measured at center point of LCD.

Note 6 : All input terminals LCD panel must be ground when measuring the center area of the panel.

6. INTERFACE

CN2

| Pin No. | Symbol | I/O | Description | Note |
|---------|--------|-----|---------------------------------------|------|
| 1 | VDD | Р | Power Voltage for Logic: 3.3V | |
| 2 | VDD | Р | Power Voltage for Logic: 3.3V | |
| 3 | GND | Р | Ground | |
| 4 | GND | Р | Ground | |
| 5 | INO- | I | - LVDS differential data input | |
| 6 | IN0+ | I | + LVDS differential data input | |
| 7 | GND | Р | Ground | |
| 8 | IN1- | I | - LVDS differential data input | |
| 9 | IN1+ | I | + LVDS differential data input | |
| 10 | GND | Р | Ground | |
| 11 | IN2- | I | - LVDS differential data input | |
| 12 | IN2+ | I | + LVDS differential data input | |
| 13 | GND | Р | Ground | |
| 14 | CLK- | I | - LVDS differential data input | |
| 15 | CLK+ | I | + LVDS differential data input | |
| 16 | GND | Р | Ground | |
| 17 | IN3- | I | - LVDS differential data input | |
| 18 | IN3+ | I | + LVDS differential data input | |
| 19 | VLED | Р | Power supply for backlight: 5V OR 12V | |
| 20 | ADJ | I | LED PWM signal | |

I : input, O : output, P : power

CN3

| Pin No. | Symbol | I/O | Description | Note |
|---------|--------|-----|---------------------------------------|------|
| 1 | VLED | Р | Power supply for backlight: 5V OR 12V | |
| 2 | GND | Р | Ground | |
| 3 | NC | | No Connect | |
| 4 | ADJ | Р | LED PWM signal | |
| 5 | NA | | No Connect | |

NOTE:


(1) ADJ is PWM signal input. It is for brightness control.


| ITEM | SYMBOL | MIN | TYP | MAX | UNIT |
|-----------------------------|--------|-----|-----|----------------|------|
| ADJ signal frequency | fрwм | 10 | - | 100 | KHz |
| ADJ signal logic level High | VIH | 2V | | VLED (5.0V) | V |
| ADJ signal logic level Low | VIL | 0 | | 0.5 | V |

7. TIMING CHARACTERISTICS

7-1 AC Electrical Characteristics

| Parameter | Symbol | | Values | | — Unit | Remark |
|------------------------|--------------------|------|----------------------------|-----|--------|--------|
| | Symbol | MIN | TYP | MAX | Offic | |
| Clock frequency | R _{xFCLK} | 40.8 | 51.2 | 71 | | |
| Input data skew margin | T _{RSKM} | 500 | | | | |
| Clock high time | T _{LVCH} | | 4/(7* R _{xFCLK}) | | | |
| Clock low time | T _{LVCL} | | 3/(7* R _{xFCLK}) | | | |

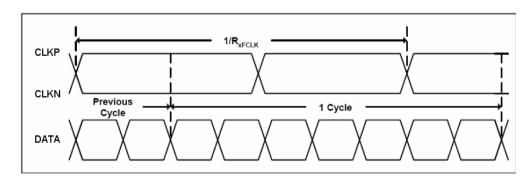


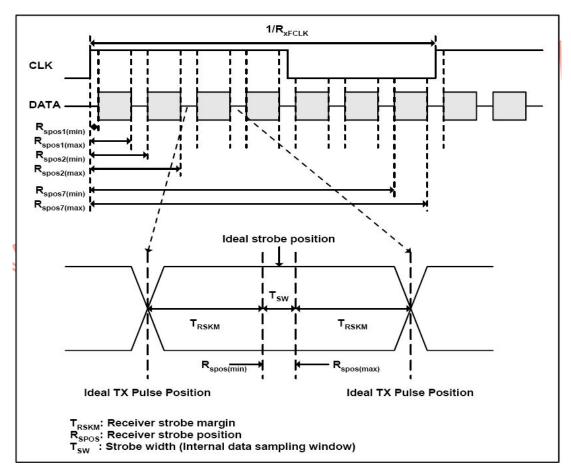

Date: 2016/03/28

7-2 DC Electrical Characteristics

| Item | Symbol | Values | | | Unit | Note |
|-------------------------------------------|-------------------|---------------------|------|--------------------------|----------|-------------------------|
| | Symbol | Min. | Тур. | Max. | Offic | Note |
| Differential input high Threshold voltage | R _{xVTH} | - | - | +0.1 | V | R _{XVCM} =1.2V |
| Differential input low Threshold voltage | R_{xVTH} | -0.1 | - | - | V | |
| Input voltage range (singled-end) | R _{xVIN} | 0 | 1 | 2.4 | ٧ | |
| Differential input common mode voltage | R _{xVCM} | V _{ID} /2 | 1 | 2.4- V _{ID} /2 | V | |
| Differential voltage | V _{ID} | 0.2 | - | 0.6 | V | |
| Differential input leakage current | RV_{xliz} | -10 | - | +10 | uA | |

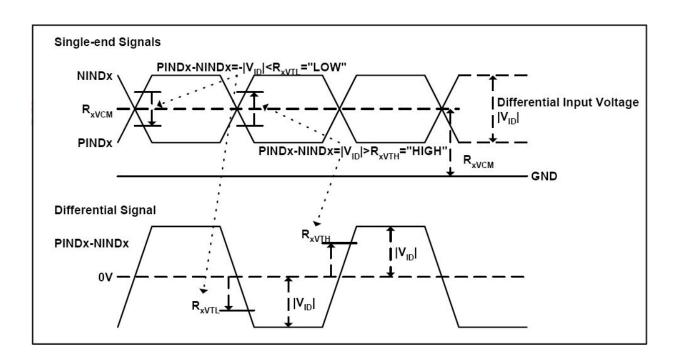


Date: 2016/03/28


7-3 Timing

| Item | Symbol | Values | | | Unit | Note |
|-------------------------|--------|--------|------|------|-------|---------------------|
| | Symbol | Min. | Тур. | Max. | Offic | Note |
| Clock Frequency | fclk | 40.8 | 51.2 | 67.2 | MHz | Frame rate =60Hz |
| Horizontal display area | thd | | 1024 | | DCLK | |
| HS period time | th | 1114 | 1344 | 1400 | DCLK | |
| HS Blanking | thb | 90 | 320 | 376 | DCLK | |
| Vertical display area | tvd | | 600 | | Н | |
| VS period time | tv | 610 | 635 | 800 | Н | |
| VS Blanking | thb | 10 | 35 | 200 | Н | |

Default setting: 6bits LVDS input. (JP2 on PCBA) 6bit LVDS input

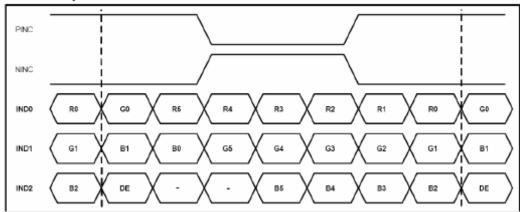

8bit LVDS input

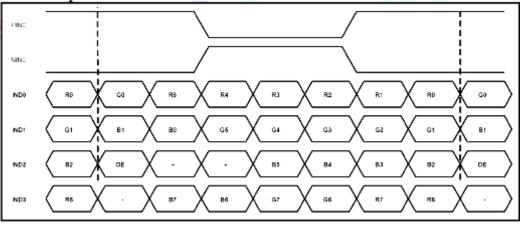

8. RELIABILITY TEST CONDITIONS

(Note 3)

| | | / |
|------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|----------|
| Item | Test Conditions | Note |
| High Temperature Storage | Ta = 80°C 240 hrs | Note 1,4 |
| Low Temperature Storage | Ta = -30°C 240 hrs | Note 1,4 |
| High Temperature Operation | Ts = 70°C 240 hrs | Note 2,4 |
| Low Temperature Operation | Ta = -20°C 240 hrs | Note1,4 |
| Operate at High Temperature and Humidity | +60℃, 90%RH 240 hrs | |
| Thermal Shock | -30 $^{\circ}$ C /30 min ~ +80 $^{\circ}$ C /30 min for a total 100 cycles, Start with cold temperature and end with high temperature | |

- Note 1: Ta is the ambient temperature of samples.
- Note 2: Ts is the temperature of panel's surface.
- Note 3: In the standard condition, there shall be no practical problem that may affect the display function. After the reliability test, the product only guarantees operation, but don't guarantee all of the cosmetic specification.
- Note 4 : Before cosmetic and function test, the product must have enough recovery time, at least 2 hours at room temperature.

9. General Precautions

9-1 Safety

Liquid crystal is poisonous. Do not put it your month. If liquid crystal touches your skin or clothes, wash it off immediately by using soap and water.

9-2 Handling

- 1. The LCD panel is plate glass. Do not subject the panel to mechanical shock or to excessive force on its surface.
- 2. The polarizer attached to the display is easily damaged. Please handle it carefully to avoid scratch or other damages.
- 3. To avoid contamination on the display surface, do not touch the module surface with bare hands.
- 4. Keep a space so that the LCD panels do not touch other components.
- 5. Put cover board such as acrylic board on the surface of LCD panel to protect panel from damages.
- 6. Transparent electrodes may be disconnected if you use the LCD panel under environmental conditions where the condensation of dew occurs.
- 7. Do not leave module in direct sunlight to avoid malfunction of the ICs.

9-3 Static Electricity

- 1. Be sure to ground module before turning on power or operation module.
- 2. Do not apply voltage which exceeds the absolute maximum rating value.

9-4 Storage

- 1. Store the module in a dark room where must keep at +25±10℃ and 65%RH or less.
- 2. Do not store the module in surroundings containing organic solvent or corrosive gas.
- 3. Store the module in an anti-electrostatic container or bag.

9-5 Cleaning

- 1. Do not wipe the polarizer with dry cloth. It might cause scratch.
- 2. Only use a soft sloth with IPA to wipe the polarizer, other chemicals might permanent damage to the polarizer.

9-6 Others

- 1. AMIPRE will provide one year warrantee for all products and three months warrantee for all repairing products.
- 2. Do not disassemble or take the LC module into pieces. The LC modules once disassembled or taken into pieces are not the guarantee articles.
- 3. Do not keep the LCD at the same display pattern continually. The residual image will happen and it will damage the LCD. Please use screen saver.

10. OUTLINE DIMENSION

