


- ▲ Input Voltage 220-240VAC
  - ▲ Protections: short circuit/over load/over voltage
  - ▲ IP20 Ingress protection
  - ▲ Power Factor ≥0.9
  - ▲ Efficiency ≥87%
  - ▲ Class II, SELV
  - ▲ 5 years warranty



## SPECIFICATION



## MECHANICAL SPECIFICATIONS

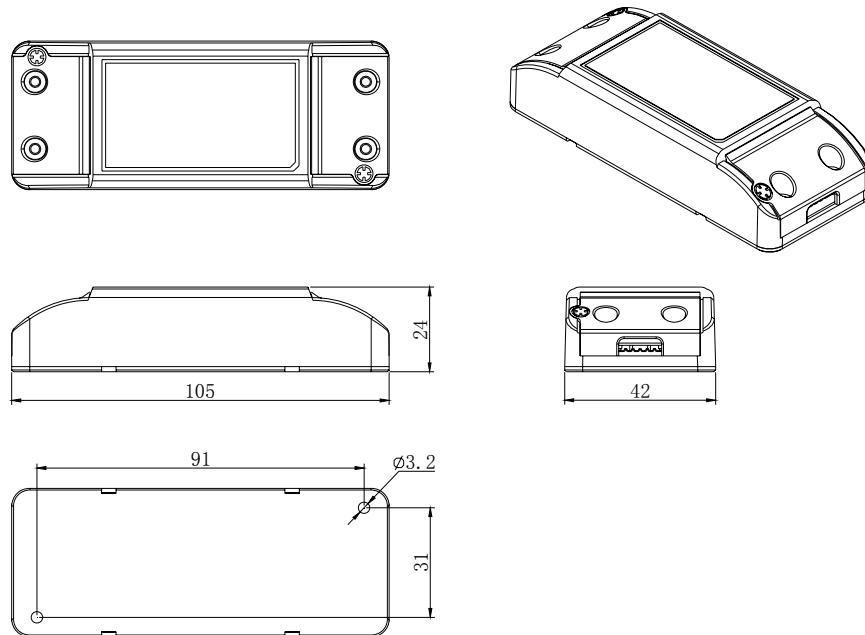

### Model list:

Model	Input	Output		
	V,A	Voltage (Vdc)	Max. V dc	Current (mA)
EIP016CxxxxL2	220V-240V~, 50/60Hz, 0.12A	40-82	92	200
		32-64	75	250
		27-54	62	300
		23-46	54	350
		24-40	48	400
		21.5-36	44	450
		19-32	40	500
		18-29.5	38	550
		16-27	35	600
		15-25	33	650
		14-23	30	700
		13-21.5	30	750
		12-20	28	800
		11-19	25	850
		10.5-18	24	900
		10-17	23	950
		9.5-16	23	1000

### Note:

"xxxx" is 4 digit number code from "0200" to "1000", which represents the output current in ampere after dividing by 1000 in a step of 0.050A, for example, "0700" means 0.7A, "1000"means 1.000A.