

APPROVAL SHEET

CUSTOMER	DIGIMAX
CUSTOMER P/N	
DESCRIPTION	24V/1.5A
EDAC MPN	EA1024R1(10)
EDAC MODEL NO FOR SAFETY	EA1024R1-240
DATE	2018-04-16
REVISION	0

APPROVED	DESIGN	PREPARE	
葉慶兵	鄒大闢	鄒大闢	RoHS
CONCLUSION 判定結果	APPROVED 承認	CONDITON APP'D 有條件承認	CUSTOMER'S SIGNATURE: 客戶簽章:



翌勝電子股份有限公司
EDAC POWER ELECTRONICS CO., LTD.
 新北市中和區建一路 150 號 11 樓之 2(E 棟)
 TEL:886-2-82263289 FAX:886-2-82263327

翌勝電子(蘇州)有限公司
 Edac Power Electronics (Suzhou) Co., Ltd.
 江蘇省蘇州工業園區勝浦鎮常勝路 59 號
 No.59, Chang Sheng Road, Sheng Pu,
 Suzhou Industrial Park, Jiangsu, China
 Tel: 512-6282-1628 Fax: 512-6282-9608

東莞市翌勝電子有限公司
 廣東省東莞市鳳崗鎮金鳳凰工業區金鳳凰大道108號
 Tel: 0769-38859898 Fax: 0769-38859897

SUBJECT: SCOPE OF DOCUMENT

CONTAINS :

1-0 General Description

2-0. Input Requirements

3-0. Output Requirements

4-0. Reliability

5-0. Environment

6-0. Safety

7-0. Mechanical Characteristics

1-0. General Description

The purpose of the document is to specify a **Single phase AC input, single output** switching power supply. This specification is suitable for: **EA1024R1 Series**

This product is AC to DC switching power transfer device, it can provide for a **24V/1.5A max & 36W max** DC output with constant voltage source.

This Specification defines the input, output, performance characteristics, environment, noise and safety requirement for a power supply.

2-0. Input Electrical Specification

2-1. AC Input Voltage

Maximum Voltage: 264Vac

Normal Voltage : 100~240Vac

Minimum Voltage: 90Vac

2-2. AC Input Frequency

Maximum Frequency: 63Hz

Normal Frequency: 50~60Hz

Minimum Frequency: 47Hz

2-3. Input Current

a. **1.0A** (Max.) @ 115Vac input with full load.

b. **0.5A**(Max.) @ 230Vac input with full load.

2-4. Energy saving standards :

Designed to meet the following standard

DoE Level VI

2-4-1 Efficiency:

87.40% minimum at 115Vac/60Hz & 230Vac/50Hz input voltage and 25%, 50%, 75% & 100% of max output current. Meet DoE Level VI

2-4-2 No Load Power Consumption:

No Load Watt < 0.1W at 115Vac/60Hz & 230Vac/50Hz input voltage.

2-5. Configuration

3-wire AC input (**Line, Neutral, FG**)

2-6. Input Fuse

The hot line side of the input shall have a fuse, rating (**T2A/250V**)

2-7. Inrush Current

30A at 115 Vac

60A at 230 Vac At cold start, maximum load.

2-8. Line Regulation

This line regulation is less than $\pm 1\%$, of rated output voltage @ full load.

2-9. Hold Up Time

8.3mSec., @ Normal line, with full load.

2-10. Rise Time

50mSec., @ Rated AC input, with full load.

From 10% to 90% of output voltage.

2-11. Turn-ON Time

The output voltage should rise to 90% of rated output voltage
in less than **3 SEC.** from AC apply 220Vac to start up.

3-0. Output Requirements

3-1. Output Voltage and Current

Output Voltage (Vdc)	Current Min.(A)	Current Max.(A)
+24V	0	1.5A

3-2. Load Regulation

Voltage (Vdc)	Tolerance (%)	Regulation (Vdc)
+24V	+5/, -5	22.8V~25.2V

3-3. Dynamic Load Regulation

$\pm 5\%$ excursion for **50% - 100%** or **100% - 50%** load change of DC output at
any frequency up to 1KHz(duty 50%)

3-4. Ripple & Noise

The power supply shall not exceed the following limits on the indicated voltage for 60Hz or 50Hz ripple, Switching frequency ripple and noise and dynamic load variations measured with a 20MHz bandwidth

Output	Ripple/Noise
+24V	1.0% max. of rated output voltage

Ripple / Noise: 60Hz ripple + switching ripple and noise

Ripple & Noise are measured at the end of output cable which are added a 0.1uF ceramic capacitor and a 47uF electrolytic capacitor

3-5. Over Voltage Protection

40V Max. of rated voltage

(Output clamped with zener diode, do not test with external DC source.)

3-6. Short-Circuit Protection

The adapter can withstand continuous short at DC output and no damage.

It will enter into normal condition if the fault condition is removed.

3-7. Stability

2% Max. at constant load with constant input (after **30 minutes** of operation).

3-8. Temperature Rise

Less than 45 °C on top/bottom case at normal AC input & 80% load of DC output at environment temperature 25 °C.

3-9. Drop-out (Power Line Disturbance)

Output voltage shall remain within the specified regulation range, through the absence of a line input during 1/2 cycle, at full load at 115Vac/50Hz & 230Vac/50Hz input voltage.

3-10. Voltage Isolation

The DC ground will be isolated from the AC neutral and AC line.

4-0. Reliability

4-1. MTBF (MIL-HDBK-217F)

The power supply shall be designed and produced to have a mean time between failures (MTBF) of 100,000 hours at 25 degrees C

5-0. Environment

5-1 Temperature

- a. Operating : 0 to 40
- b. Storage : -20 to 85

5-2 Humidity

- a. Operating : 10 to 90 %
- b. Storage: 5 to 90 %

5-3 Altitude

From sea level to 5,000Meter (operation) and 5,000Meter (non operation)

6-0. Safety

6-1. Hi-Pot Test

1800Vac 5mA 2Sec. between primary and secondary circuit

6-2. Insulation Test

500Vdc, 2Sec. between primary and secondary circuit

IR should **100 MΩ.**

6-3. Leakage Current

750uA,at 240 Vac/50 Hz

6-4. Safety

UL,CUL, TUV, CB, CE, FCC, CCC, PSE, CU, BSMI

6-5. EMS

Items	Specification	Reference
ESD	Contact: $\pm 4KV$	IEC 61000-4-2
	Air: $\pm 8KV$	
RS	Frequency:80~1000MHz Field Strength: 3V/M , 80% AM(1KHz)	IEC 61000-4-3
EFT	1.0 KV on input AC power ports.	IEC 61000-4-4
SURGE	Line to Line: $\pm 1KV$ (peak) Line to FG: $\pm 2KV$ (peak)	IEC 61000-4-5

6-6. EMI

Comply with Standards
CISPR 32, EN 55032 Class B
FCC PART 15 Class B

7-0. Mechanical Characteristics

7-1. Physical Size : 98 mm (L) * 46 mm (W) * 31 mm (H)

7-2. Enclosure material : 94V-0 minimum

7-3. Output Cable (Reference) :UL 1185 #18 (AC ground is connected to DC return.)


7-4. Vibration Test

The vibration frequencies are set at 20Hz, with total amplitude of 1.5mm
Along the 3 directions namely X-Y-Z. The each direction should be vibrated
for 60 minutes, after testing no abnormal electrical or mechanical should occur.

7-5. Drop Test (Referencing to CSA C22.2 No.950/UL1950/UL1310/EN60950)

Products shall be dropped from a height of 900 mm onto a horizontal surface
consists of hardwood at 13mm thick, mounted on two layers of plywood each
19mm to 20mm thick, all supported on a concrete or equivalent non-resilient
floor. Upon conclusion of test, the equipment need not be operational.

7-6. Net Weight (Reference) : 200g

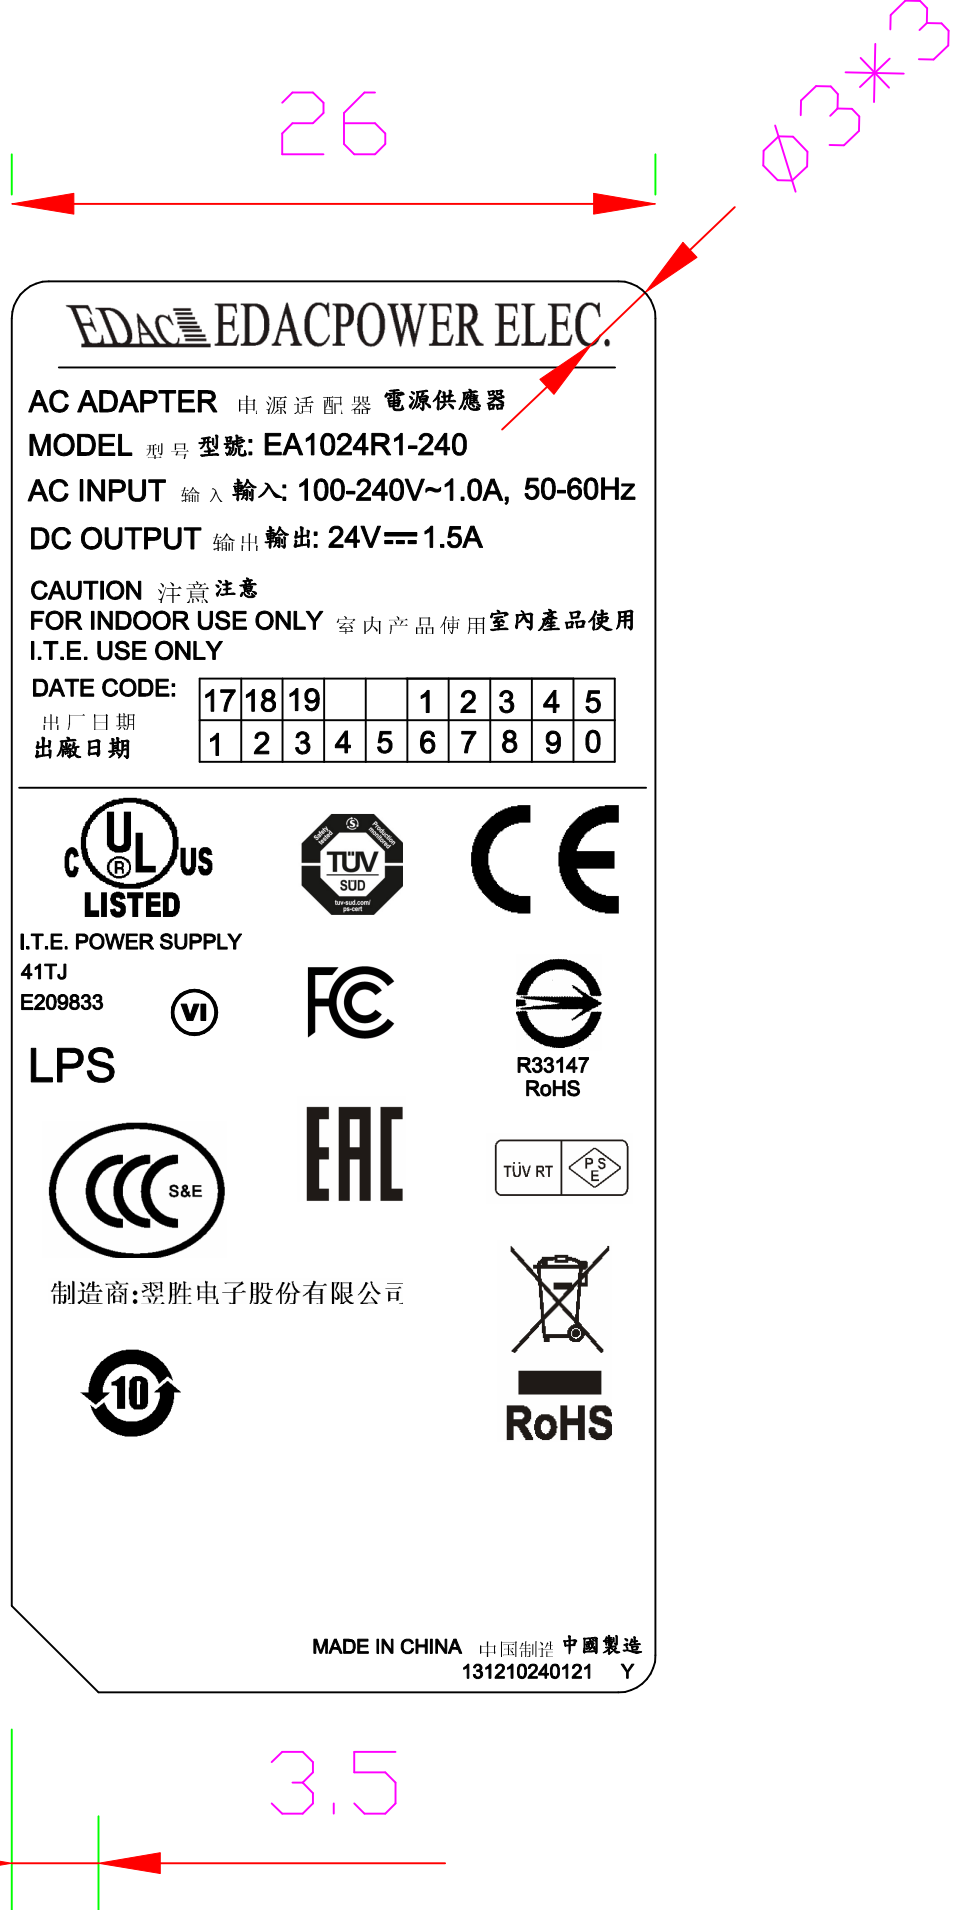




EDAC P/N.: 31210240121

factory name.: Y:1-N digits Y=0-9; A-Z; -; blank

Background: Black color

Character: Silver color

Unit: mm

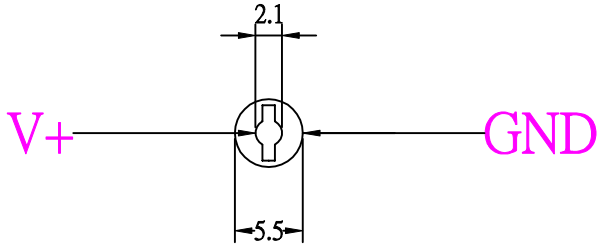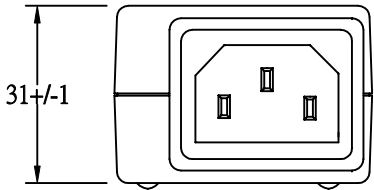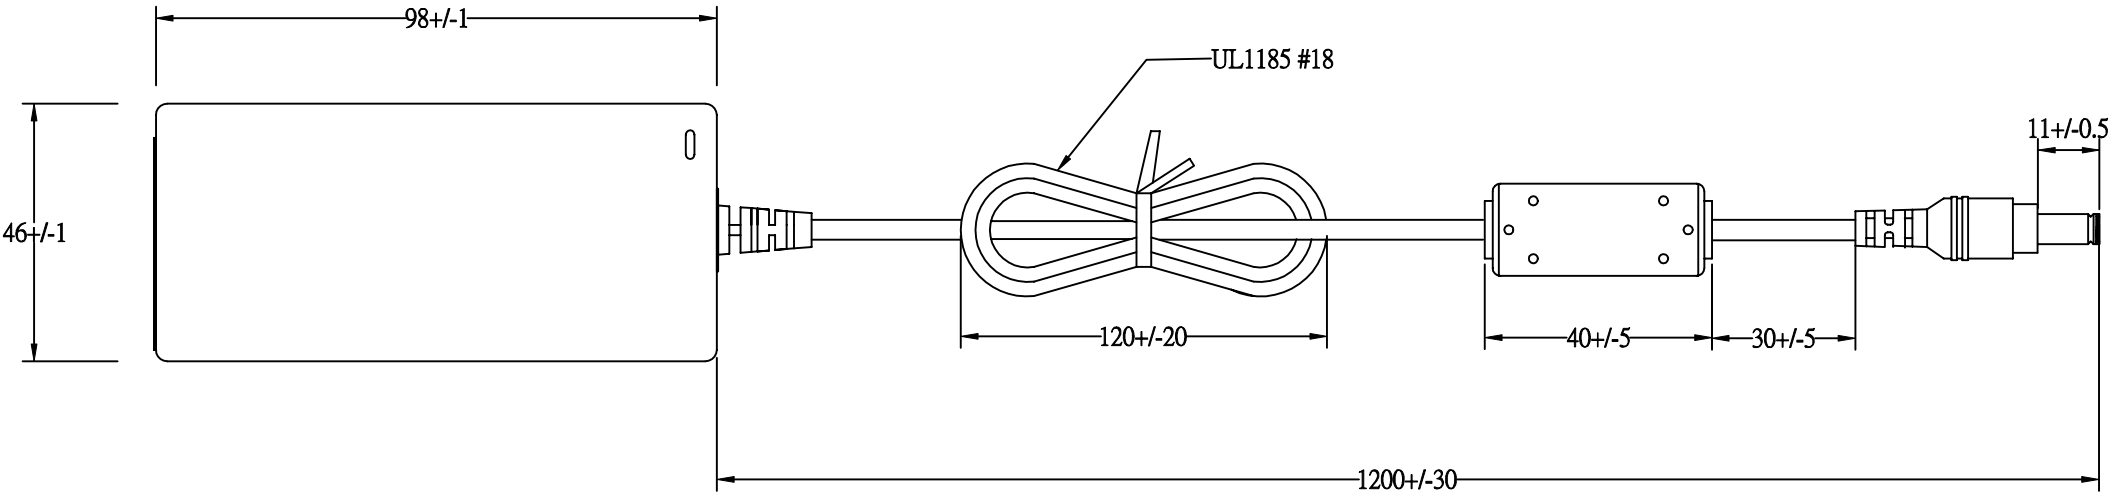

EDACPOWER ELEC.				APPROVED
MODEL	EA1024R1(10)	UNIT	mm	DESIGNED
color	BLACK	SCALE		CHECK
cus.		DATE	2018-04-16	DRAWING L.J.YU