

Super Slim LED Power Supply

CV Version



Reliable Technical Data


- Rated Input Voltage:200-240VAC
 - Input Frequency:50Hz
 - Output Power:12W
 - Dimension:L127.3xW49.8xH10.7mm
 - Body:PC
 - Open Circuit;Short Circuit;Over Load;
 - Over Heat Protection
- Safety According to EN61347-1,EN61347-2-13
 - EMI According to EN55015
 - EMF According to EN62493-2010
 - EMS According to EN61000-3-2;EN61000-3-3;EN61547
 - Approbation Mark:CE ROHS;TUV;C-Tick SAA



CC Version



Dimension in mm

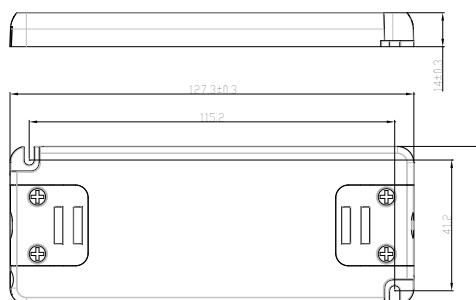

NEW direct plug-in feature!

Characteristics

Rated input voltage: AC200-240V 50Hz (power factor measured at AC230V and full load)

Model No.	Constant out voltage	Load	Max output Current	PF	Ta	Tc	LxWxH	Approval
SNP12-12VF	12V	0-12W	1.0A	0.5/0.9	45°C	80°C	127.3X49.8X10.7	TUV SAA
SNP12-24VF	24V	0-12W	0.5A	0.5/0.9	45°C	80°C	127.3X49.8X10.7	TUV SAA

Model No.	Constant output Current	Load	Max output Voltage	PF	Ta	Tc	LxWxH	Approval
SNP12-350IF	350mA	0-12W	34VDC	≥0.5	45°C	80°C	127.3X49.8X10.7	TUV SAA
SNP12-500IF	500mA	0-12W	24VDC	≥0.5	45°C	80°C	127.3X49.8X10.7	TUV SAA
SNP12-700IF	700mA	0-12W	17VDC	≥0.5	45°C	80°C	127.3X49.8X10.7	TUV SAA