

Super Slim LED Power Supply

CV Version



Reliable Technical Data


- Rated Input Voltage:200-240VAC
- Input Frequency:50Hz
- Output Power:50W
- Body:PC
- Open Circuit;Short Circuit;Over Load;
- Over Heat Protection



CC Version



Dimension in mm

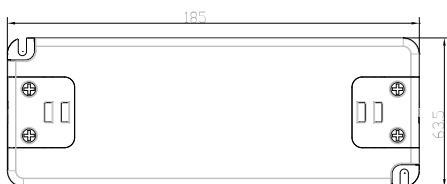

Characteristics

Rated input voltage: AC200-240V 50Hz (power factor measured at AC230V and full load)

Model No.	Constant output Voltage	Load	Max output Current	PF	Ta	Tc	L×W×H	Approval
SNP50-12VF	12V	0-50W	4.17A	≥0.9	45℃	80℃	185X63.5X22	TUV SAA
SNP50-24VF	24V	0-50W	2.08A	≥0.9	45℃	80℃	185X63.5X22	TUV SAA

Model No.	Constant output Current	Load	Range output Voltage	PF	Ta	Tc	L×W×H	Approval
SNP50-500IF	500mA	25-50W	50-100VDC	≥0.9	45℃	80℃	185X63.5X22	TUV
SNP50-700IF	700mA	25-50W	36-72VDC	≥0.9	45℃	80℃	185X63.5X22	TUV SAA
SNP50-950IF	950mA	25-50W	26.5-53VDC	≥0.9	45℃	80℃	185X63.5X22	TUV SAA
SNP50-1050IF	1050mA	25-50W	24-48VDC	≥0.9	45℃	80℃	185X63.5X22	TUV SAA
SNP50-1400IF	1400mA	25-50W	18-36VDC	≥0.9	45℃	80℃	185X63.5X22	TUV SAA
SNP50-2100IF	2100mA	25-50W	12-23.8VDC	≥0.9	45℃	80℃	185X63.5X22	TUV