


# Economic LED Power Supply

SNP8-VL-2/SNP8-IL-2

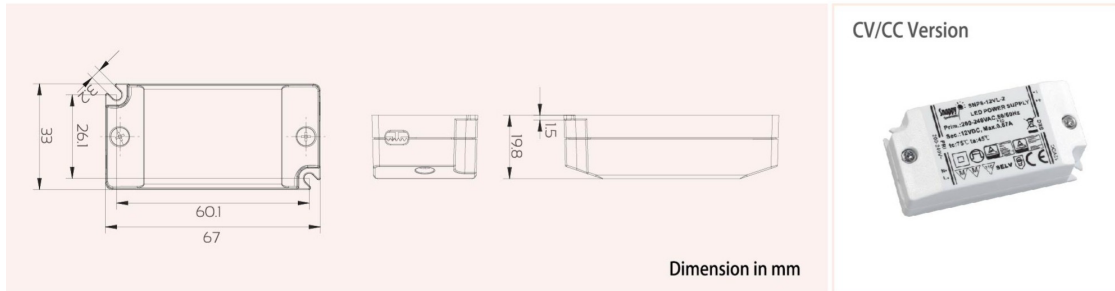

## Characteristics

Rated input voltage: AC200-240V 50/60Hz (power factor measured at AC230V and full load)

Model No.	Constant output voltage	Load	Max output Current	PF	Ta	Tc	L×W×H
SNP8-12VL-2	12V	0-8W	0.67A	≥ 0.8	45 °C	75 °C	67X33X19.8
SNP8-24VL-2	24V	0-8W	0.33A	≥ 0.8	45 °C	75 °C	67X33X19.8

Model No.	Constant output voltage	Load	Max output Voltage	PF	Ta	Tc	L×W×H
SNP8-350IL-2	350mA	2-8W	23V	≥ 0.5	45 °C	75 °C	67X33X19.8
SNP8-500IL-2	500mA	2-8W	16V	≥ 0.5	45 °C	75 °C	67X33X19.8
SNP8-700IL-2	700mA	2-8W	11.5V	≥ 0.5	45 °C	75 °C	67X33X19.8

## Reliable Technical Data

- Rated Input Voltage:200-240VAC
- Input Frequency:50/60Hz
- Output Power:8W
- Body:PC
- Open Circuit;Short Circuit;Over Load;
- Over Heat Protection
- Safety According to EN61347-1,EN61347-2-13
- EMI According to EN55015
- EMS According to EN61000-3-2;EN61000-3-3;EN61547
- EMF According to EN62493-2010
- ERP According to EN1194-2012

New versions are less weight,slimmer and smaller sizes

SELV

