




**3**  
YEARS  
WARRANTY

ROHS  
COMPLIANT

REACH  
COMPLIANT

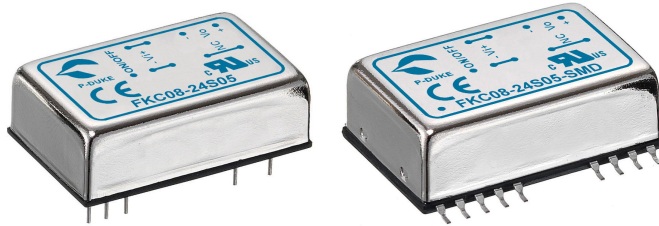

Automation



Datacom



IPC



Industry



Measurement



Telecom



Automobile



Boat



Charger



Medical



PV



Railway

UL US CB CE

**1600**  
VDC  
Isolation  
Voltage

**2 : 1**  
Input  
Range

**NO**  
Min. Load  
Required

**REMOTE**  
**ON**  
**OFF**

**OCP**

**SCP**

### PART NUMBER STRUCTURE

FKC08 -	48	S	05	-	SMD	M3
Series Name	Input Voltage (VDC)	Output Quantity	Output Voltage (VDC)		Mounting Type Option	Operating Temp. Option
	12:9~18 24:18~36 48:36~75	S:Single	33:3.3 05:5 12:12 15:15		<input type="checkbox"/> : DIP type <b>SMD</b> : SMD type	<input type="checkbox"/> : Standard -40~+100°C With derating <b>M3</b> : M3 Version -55~+100°C With derating
		D: Dual	05:±5 12:±12 15:±15			

**TECHNICAL SPECIFICATION** All specifications are typical at nominal input, full load and 25°C unless otherwise noted

Model Number	Input Range	Output Voltage	Output Current @Full Load	Input Current @ No Load	Efficiency	Maximum Capacitor Load
	VDC	VDC	mA	mA	%	μF
FKC08-12S33	9 ~ 18	3.3	2000	10	80	3300
FKC08-12S05	9 ~ 18	5	1500	15	83	1600
FKC08-12S12	9 ~ 18	12	666	13	88	350
FKC08-12S15	9 ~ 18	15	533	20	87	240
FKC08-12D05	9 ~ 18	±5	±800	15	83	±1000
FKC08-12D12	9 ~ 18	±12	±333	20	87	±160
FKC08-12D15	9 ~ 18	±15	±267	20	85	±100
FKC08-24S33	18 ~ 36	3.3	2000	10	80	3300
FKC08-24S05	18 ~ 36	5	1500	30	83	1600
FKC08-24S12	18 ~ 36	12	666	13	86	350
FKC08-24S15	18 ~ 36	15	533	15	85	240
FKC08-24D05	18 ~ 36	±5	±800	15	82	±1000
FKC08-24D12	18 ~ 36	±12	±333	15	86	±160
FKC08-24D15	18 ~ 36	±15	±267	13	85	±100
FKC08-48S33	36 ~ 75	3.3	2000	7	80	3300
FKC08-48S05	36 ~ 75	5	1500	8	83	1600
FKC08-48S12	36 ~ 75	12	666	10	86	350
FKC08-48S15	36 ~ 75	15	533	10	86	240
FKC08-48D05	36 ~ 75	±5	±800	8	85	±1000
FKC08-48D12	36 ~ 75	±12	±333	8	87	±160
FKC08-48D15	36 ~ 75	±15	±267	7	87	±100

**INPUT SPECIFICATIONS**

Parameter	Conditions		Min.	Typ.	Max.	Unit
Operating input voltage range	12Vin(nom) 24Vin(nom) 48Vin(nom)		9 18 36	12 24 48	18 36 75	VDC
Start up time	Constant resistive load	Power up Remote ON/OFF		700 5		ms
Input surge voltage	100 ms, max.	12Vin(nom) 24Vin(nom) 48Vin(nom)			36 50 100	VDC
Input filter				Pi type		
Remote ON/OFF	Referred to -Vin pin	Positive logic DC-DC ON DC-DC OFF Input current of Ctrl pin Remote off input current	-0.5	2.5	Open or 3.5 ~ 12VDC Short or 0 ~ 1.2VDC +0.5	mA mA

**OUTPUT SPECIFICATIONS**

Parameter	Conditions		Min.	Typ.	Max.	Unit
Voltage accuracy			-1.0		+1.0	%
Line regulation	Low Line to High Line at Full Load		-0.2		+0.2	%
Load regulation	No Load to Full Load	DIP type	-0.5		+0.5	%
		Single	-1.0		+1.0	
		Dual	-1.0		+1.0	
Cross regulation	Asymmetrical load 25%/100% FL	Single	-1.0		+1.0	%
		Dual	-5.0		+5.0	
Ripple and noise	20MHz bandwidth			50		mVp-p
Temperature coefficient			-0.02		+0.02	%/°C
Transient response recovery time	25% load step change			200		μs
Over load protection	% of lout rated			150		%
Short circuit protection			Continuous, automatics recovery			

**GENERAL SPECIFICATIONS**

Parameter	Conditions		Min.	Typ.	Max.	Unit
Isolation voltage	1 minute	DIP type	1600			VDC
		Input to Output	1600			
	SMD type	Input (Output) to Case	1600			
		Input to Output	1600			
Isolation resistance	500VDC	Input (Output) to Case	1000			GΩ
Isolation capacitance					300	pF
Switching frequency			270	300	330	kHz
Safety approvals	IEC /UL/ EN60950-1					UL:E193009 CB:UL(Demko)
Case material						Nickel-coated copper
Base material						Non-conductive black plastic
Potting material						Epoxy (UL94 V-0)
Weight						18g (0.62oz)
MTBF	MIL-HDBK-217F					3.543 x 10 <sup>6</sup> hrs


**ENVIRONMENTAL SPECIFICATIONS**

Parameter	Conditions		Min.	Typ.	Max.	Unit
Operating ambient temperature	Standard M3 Version	With derating	-40		+100	°C
		With derating	-55		+100	
Maximum case temperature					100	°C
Storage temperature range			-55		+125	°C
Thermal impedance				20		°C/W
Thermal shock						MIL-STD-810F
Vibration						MIL-STD-810F
Relative humidity						5% to 95% RH


**EMC SPECIFICATIONS**

Parameter	Conditions		Level
EMI	EN55032	With external components	Class A · Class B
ESD	EN61000-4-2	Air ± 8kV and Contact ± 6kV	Perf. Criteria A
Radiated immunity	EN61000-4-3	10 V/m	Perf. Criteria A
Fast transient	EN61000-4-4	± 2kV	Perf. Criteria A
		With an external input filter capacitor (Nippon chemi-con KY series, 220µF/100V)	
Surge	EN61000-4-5	± 1kV	Perf. Criteria A
		With an external input filter capacitor (Nippon chemi-con KY series, 220µF/100V)	
Conducted immunity	EN61000-4-6	10 Vr.m.s	Perf. Criteria A
Power frequency magnetic field	EN61000-4-8	100A/m continuous; 1000A/m 1 second	Perf. Criteria A


**CAUTION:** This power module is not internally fused. An input line fuse must always be used.

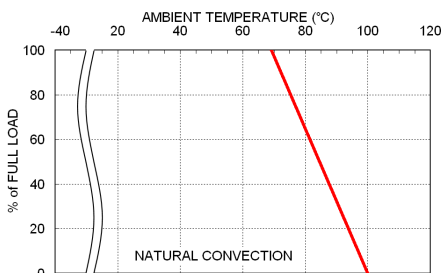**CHARACTERISTIC CURVE**


FKC08-48S05 Derating Curve

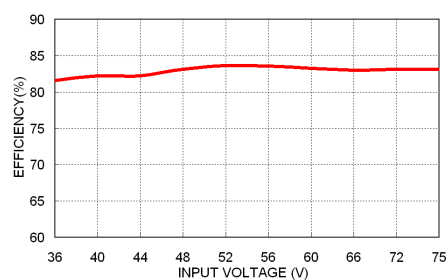

FKC08-48S05 Efficiency vs. Input Voltage

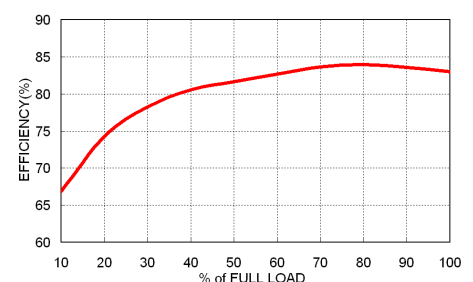

FKC08-48S05 Efficiency vs. Output Load

## FUSE CONSIDERATION

This power module is not internally fused. An input line fuse must always be used.

This encapsulated power module can be used in a wide variety of applications, ranging from simple stand-alone operation to an integrated part of sophisticated power architecture.

To maximum flexibility, internal fusing is not included; however, to achieve maximum safety and system protection, always use an input line fuse.


The input line fuse suggest as below :

Model	Fuse Rating (A)	Fuse Type
FKC08-12S□□、FKC08-12D□□	2	Slow-Blow
FKC08-24S□□、FKC08-24D□□	1	Slow-Blow
FKC08-48S□□、FKC08-48D□□	0.5	Slow-Blow

The table based on the information provided in this data sheet on inrush energy and maximum DC input current at low Vin.

## MECHANICAL DRAWING

### DIP type

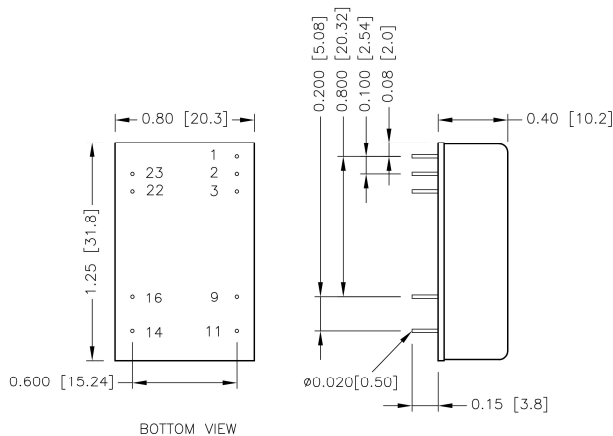


BOTTOM VIEW

### PIN CONNECTION

PIN	SINGLE	DUAL	PIN	SINGLE	DUAL
1	Ctrl	Ctrl			
2	-Vin	-Vin	23	+Vin	+Vin
3	-Vin	-Vin	22	+Vin	+Vin
9	NC	Common	16	-Vout	Common
11	NC	-Vout	14	+Vout	+Vout

### SMD type

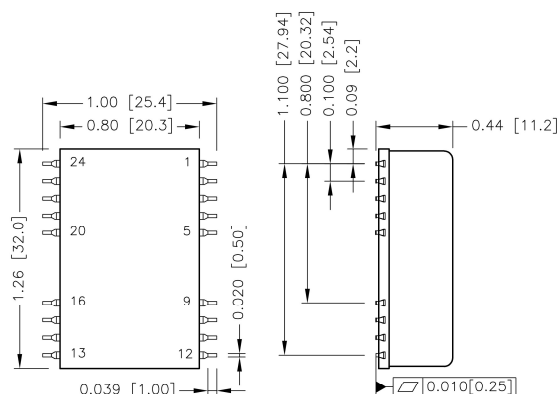

BOTTOM VIEW


### PIN CONNECTION

PIN	SINGLE	DUAL	PIN	SINGLE	DUAL
1	Ctrl	Ctrl			
2	-Vin	-Vin	23	+Vin	+Vin
3	-Vin	-Vin	22	+Vin	+Vin
9	NC	Common	16	-Vout	Common
11	NC	-Vout	14	+Vout	+Vout
Others	NC	NC			

- All dimensions in inch [mm]
- Tolerance :x.xx±0.02 [x.x±0.5]  
x.xxx±0.01 [x.xx±0.25]
- Pin pitch tolerance ±0.01 [0.25]
- Pin dimension tolerance ±0.004[0.10]


**RECOMMENDED PAD LAYOUT**

**DIP type**



All dimensions in inch[mm]  
 Pad size(lead free recommended)  
 Through hole 1.2.3.9.11.14.16.22.23:  $\Phi 0.031[0.80]$   
 Top view pad 1.2.3.9.11.14.16.22.23:  $\Phi 0.039[1.00]$   
 Bottom view pad 1.2.3.9.11.14.16.22.23:  $\Phi 0.063[1.60]$

**SMD type**

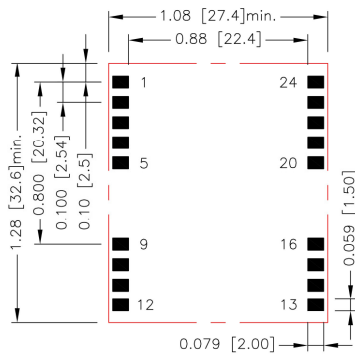

All dimensions in inch[mm]  
 Pad size(lead free recommended)  
 Top view pad: 0.079x0.059[2.00x1.50]

**THERMAL CONSIDERATIONS**

The power module operates in a variety of thermal environments.

However, sufficient cooling should be provided to help ensure reliable operation of the unit.

Heat is removed by conduction, convection, and radiation to the surrounding Environment.


Proper cooling can be verified by measuring the point as the figure below.

The temperature at this location should not exceed 100°C.

When Operating, adequate cooling must be provided to maintain the test point temperature at or below 100°C.

Although the maximum point Temperature of the power modules is 100°C, you can limit this Temperature to a lower value for extremely high reliability.

- Thermal test condition with vertical direction by natural convection (20LFM).

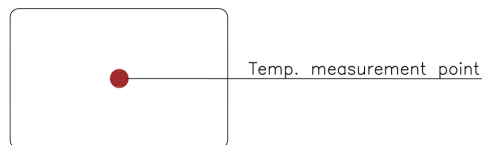

TOP VIEW