

**Preliminary**

The contents of this document are confidential and must not be disclosed wholly or in part to any third part without the prior written consent of AMPIRE CO., LTD

---



晶采光電科技股份有限公司  
**AMPIRE CO., LTD.**

# SPECIFICATIONS FOR LCD MODULE

<b>CUSTOMER</b>	
<b>CUSTOMER PART NO.</b>	
<b>AMPIRE PART NO.</b>	<b>AM-1024768Q4TMQW-50H</b>
<b>APPROVED BY</b>	
<b>DATE</b>	

- Approved For Specifications**
- Approved For Specifications & Sample**

AMPIRE CO., LTD.

4F., No.116, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City221, Taiwan (R.O.C.)

新北市汐止區新台五路一段 116 號 4 樓(東方科學園區 A 棟)

TEL:886-2-26967269 , FAX:886-2-26967196 or 26967270

<b>APPROVED BY</b>	<b>CHECKED BY</b>	<b>ORGANIZED BY</b>

**Preliminary**

The contents of this document are confidential and must not be disclosed wholly or in part to any third part without the prior written consent of AMPIRE CO., LTD

---

**RECORD OF REVISION**

<b>Revision Date</b>	<b>Page</b>	<b>Contents</b>	<b>Editor</b>
2016/12/08	-	New Release	Mark
2018/04/18	6	ADJ Input Voltage Min.	Lawlite

## Preliminary

The contents of this document are confidential and must not be disclosed wholly or in part to any third part without the prior written consent of AMPIRE CO., LTD

---

## 1. FEATURES

The TFT is a color active matrix TFT LCD module using amorphous silicon TFT's (Thin Film Transistors) as an active switching devices. This module is composed of a TFT LCD panel, a driving circuit and a back light system. This TFT LCD has a 15.0 inch diagonally measured active display area with (1024 x 768 pixel) resolution.

- (1) 15.0 inch configuration
- (2) One channel LVDS interface
- (3) 16.2M color by 8 bit R.G.B signal input
- (4) RoHS Compliance
- (5) Viewing Direction: 6 o'clock ( Gray Inversion )

## 2. PHYSICAL SPECIFICATIONS

Item	Specifications	Unit	Note
LCD size	15.0" (Diagonal)	inch	
Active area	304.128 (H) ×228.096 (V)	mm	
Number of pixels	1024(H) ×768(V)	pixels	
Pixel pitch	0.297(H) × 0.297(V)	mm	
Pixel arrangement	RGB Vertical stripe		
Display colors	16.2M	colors	
Display mode	Normally white		
Dimensional outline	326.5 (Typ) ×253.5 (Typ) ×12.0(D)	mm	
Back-light	Single LED (Side-Light type)		
Gray Inversion	6	H	
Weight	TBD	g	
Surface treatment	Anti-glare, Hard-Coating (3H)		

**Preliminary**

The contents of this document are confidential and must not be disclosed wholly or in part to any third part without the prior written consent of AMPIRE CO., LTD

---

**3. ABSOLUTE MAX. RATINGS**

The followings are maximum values which, if exceed, may cause faulty operation or damage to the unit.

Item	Symbol	Values		UNIT	Note
		Min.	Max.		
LED Power Supply Voltage	V <sub>LED</sub>	-0.3	15.0	V	GND=0
Logic Supply Voltage	V <sub>DD</sub>	-0.3	5.0	V	
Operating Temperature	T <sub>OPA</sub>	-30	80	°C	
Storage Temperature	T <sub>STG</sub>	-30	80	°C	

## Preliminary

The contents of this document are confidential and must not be disclosed wholly or in part to any third part without the prior written consent of AMPIRE CO., LTD

# 4. ELECTRICAL CHARACTERISTICS

## 4.1 TFT LCD Module


Item	Symbol	Values			UNIT	Note
		Min.	Typ.	Max.		
Power voltage	VDD	3.0	3.3	3.6	V	Note1
Current of power supply	IDD	-	0.3	-	A	VDD=3.3V Black pattern
Power voltage for LED driver	VLED	-	12	-	V	
LED driver current of power supply	ILED	-	1.2		A	VLED=12V ADJ=100%

Note 1: VDD-dip condition :

when  $2.7V \leq VDD < 3.0V$  ,  $td \leq 10ms$ .

$VDD > 3.0V$  , VDD-dip condition should be same as VDD-turn-con condition.

## 4.2 LVDS Input Data Mapping

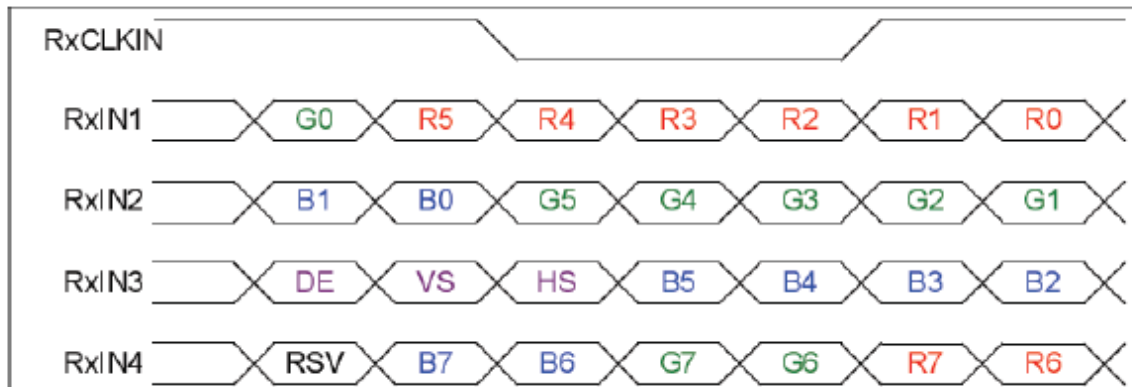

## Preliminary

The contents of this document are confidential and must not be disclosed wholly or in part to any third part without the prior written consent of AMPIRE CO., LTD

### 4.3 Timing characteristics of input signals

Synchronization Method : DE only

Parameter	Symbol	Unit	Min.	Typ.	Max.
LVDS Clock Frequency <single >	fdck	MHz	50	65	80
H Total Time	Thp	clocks	1056	1344	1720
H Active Time	HA	clocks	1024	1024	1024
H Front Porch	Thfp	clocks	-	48	-
H Sync Pulse Width	HSPW	clocks	-	32	-
H Back Porch	Thbp	clocks	-	240	-
H Frequency	fh	kHz	46.32	48.36	59.40
V Total Time	Tvp	lines	772	806	990
V Active Time	VA	lines	768	768	768
V Front Porch	Tvfp	lines	-	3	-
V Sync Pulse Width	VSPW	lines	-	12	-
V Back Porch	Tvbp	lines	-	23	-
V Frequency	fv	Hz		60	

Note: H Blank area and V Blank area can not be changed at every frame

### 4.4 Backlight Driving Conditions


Item	Symbol	Values			Unit	Note
		Min.	Typ.	Max.		
LED Driver voltage	VLED	-	12	-	V	
Power Supply Current For LED Driver	ILED	-	1.2	-	A	VLED=12V VADJ=5V (duty 100%)
ADJ Input Voltage	V <sub>ADJ</sub>	3.3	5	VLED	V	duty=100%
ADJ Dimming Freq.	F <sub>ADJ</sub>	0.1		30	kHz	
LED voltage	V <sub>AK</sub>	--	35	--	V	I <sub>AK</sub> =300mA Ta=25°C
LED current	I <sub>AK</sub>	--	300	--	mA	Ta=25°C
		--	225	--	mA	Ta=60°C
LED Life Time	-	--	50K	--	Hour	Note (2)

**Preliminary**

The contents of this document are confidential and must not be disclosed wholly or in part to any third part without the prior written consent of AMPIRE CO., LTD

Note (1) The constant current source is needed for white LED back-light driving.

When LCM is operated at 60 deg.C ambient temperature, the  $I_L$  of the LED back-light should be adjusted to 225mA max

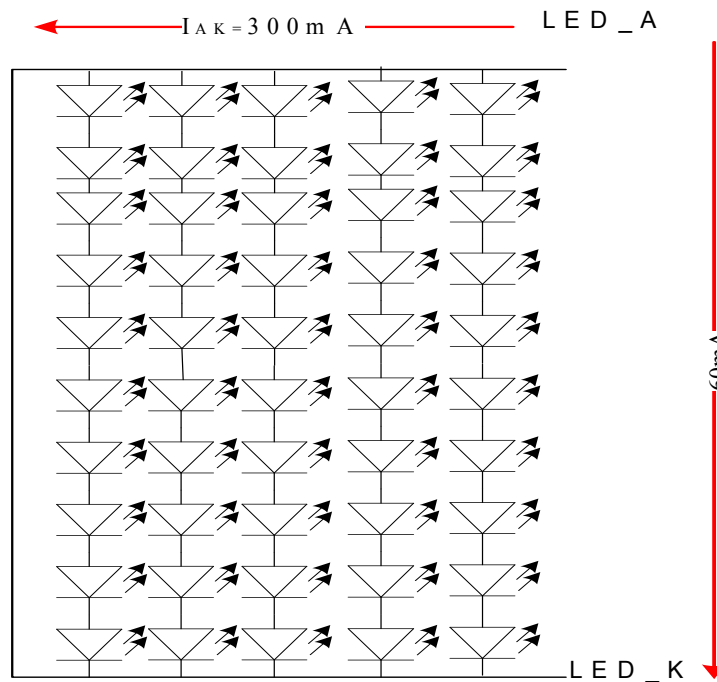


Note (2) : Condition:  $T_a = 25^\circ\text{C}$ , continuous lighting

Life time is estimated data. Definitions of failure:

- 1. LCM brightness becomes half of the minimum value.
- 2. LED doesn't light normally.

When LCM is operated over  $40^\circ\text{C}$  ambient temperature, the  $I_{LED}$  should follow :

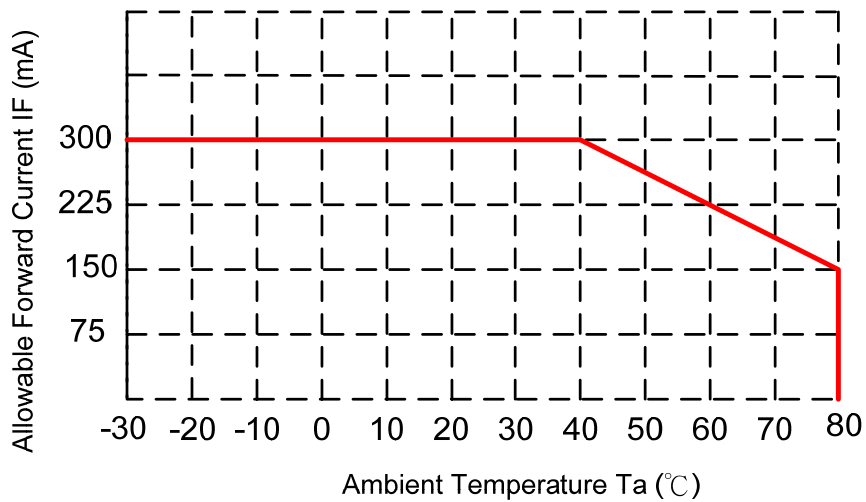

**Preliminary**

The contents of this document are confidential and must not be disclosed wholly or in part to any third part without the prior written consent of AMPIRE CO., LTD

**5. OPTICAL SPECIFICATION****5.1 Optical specification**

Item	Symbol	Condition	Values			Unit	Note
			Min.	Typ.	Max.		
Viewing angle	$\theta L$	$(CR \geq 10)$	70	80	--	degree	Note1 Note2
	$\theta R$		70	80	--		
	$\theta U$		70	80	--		
	$\theta D$		60	80	--		
Response time	TR	Normal $\theta = \Phi = 0^\circ$	--	5	--	msec	Note3
	TF		--	20	--	msec	
Contrast ratio	CR		450	800	--	--	Note2
Color chromaticity	WX		0.27	0.32	0.37	--	Note1 Note4
	WY		0.29	0.34	0.39	--	
	RX		0.57	0.62	0.67	--	
	RY		0.30	0.35	0.4	--	
	GX		0.27	0.32	0.37	--	
	GY		0.58	0.63	0.68	--	
	BX		0.1	0.15	0.2	--	
	BY	0.02	0.07	0.12.	--		
Luminance	L	800	1000	--	cd/m <sup>2</sup>	Note4	
Luminance uniformity	YU	70	75	--	%	Note5	

**5.2 Measuring Condition**

- Measuring surrounding : dark room
- Ambient temperature : 25±2°C
- 15min. warm-up time



## Preliminary


The contents of this document are confidential and must not be disclosed wholly or in part to any third part without the prior written consent of AMPIRE CO., LTD

---

### 5.2 Measuring Equipment

The optical characteristics should be measured in dark room. After 30 minutes operation, the optical properties are measured at the center point of the LCD screen. (Response time is measured by Photo detector TOPCON BM-7 of view : 1° / Height : 120mm.)

Note 1 : Definition of viewing angle range

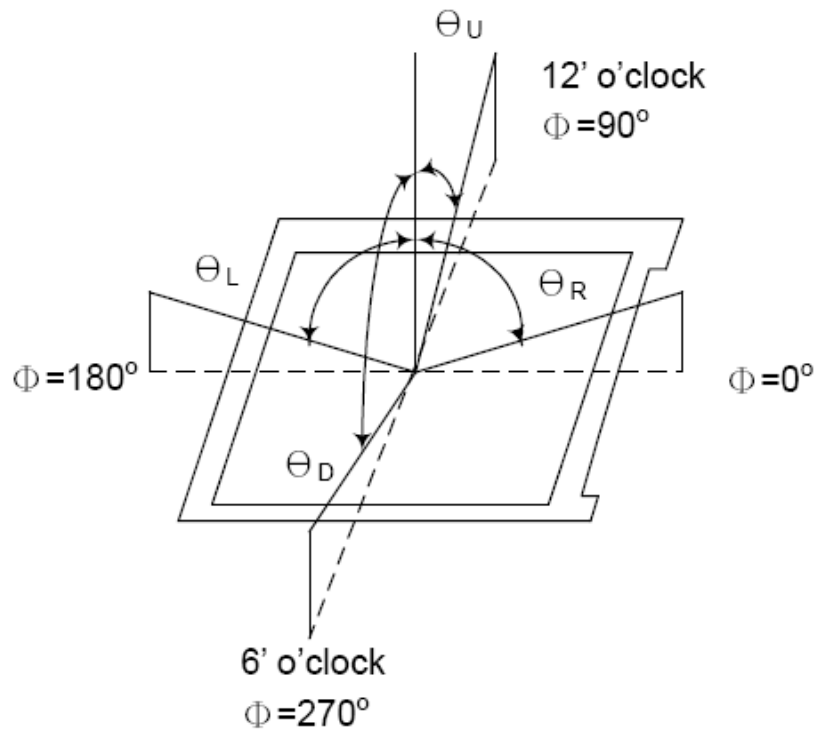


Note 2 : Definition of Contrast Ratio (CR) :  
measured at the center point of panel

$$CR = \frac{\text{Luminance with all pixels white}}{\text{Luminance with all pixels black}}$$


**Preliminary**

The contents of this document are confidential and must not be disclosed wholly or in part to any third part without the prior written consent of AMPIRE CO., LTD


Note 3 : Definition of Response time : Sum of  $T_R$  and  $T_F$

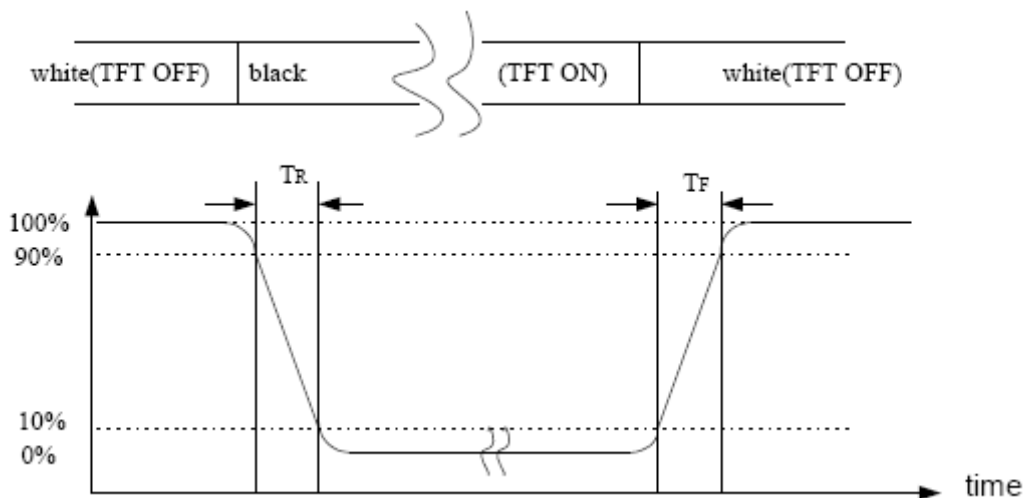

Note 4 : Definition of optical measurement setup

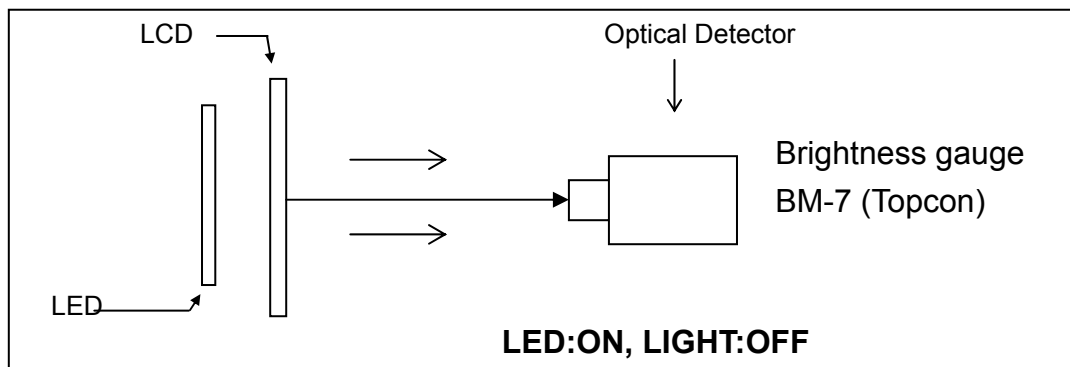

Note 5 : Definition of brightness uniformity

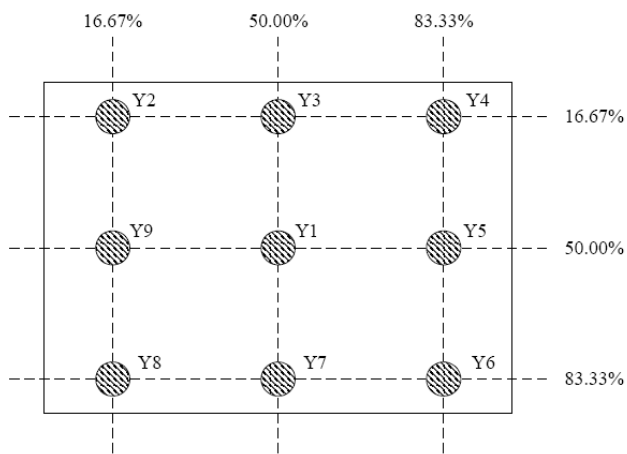

(Min Luminance of 9 points)

$$\text{Luminance uniformity} = \frac{\text{Min Luminance of 9 points}}{\text{Max Luminance of 9 points}} \times 100\%$$

**Preliminary**

The contents of this document are confidential and must not be disclosed wholly or in part to any third part without the prior written consent of AMPIRE CO., LTD

---

Note 6 : Rubbing Direction (The different Rubbing Direction will cause the different optima view direction)

Note 7 : Condition:  $T_a=25^{\circ}\text{C}$ , Life time is estimated data.

Definitions of failure:

- i. LCM brightness becomes half of the minimum value.
- ii. LED doesn't light normally.



**Preliminary**

The contents of this document are confidential and must not be disclosed wholly or in part to any third part without the prior written consent of AMPIRE CO., LTD

---

**7.INTERFACE****7.1 Electrical Interface Connection****CN1(Input signal): MSB240420HD**

Pin No.	Symbol	Description	Note
1	VDD	3.3V Power	
2	VDD	3.3V Power	
3	VSS	Ground	
4	REV	Reverse Scan selection	Note1*
5	Rin1-	LVDS Data Signal - Rin1-	
6	Rin1+	LVDS Data Signal+ Rin1+	
7	VSS	Ground	
8	Rin2-	LVDS Data Signal – Rin2-	
9	Rin2+	LVDS Data Signal+ Rin2+	
10	VSS	Ground	
11	Rin3-	LVDS Data Signal – Rin3-	
12	Rin3+	LVDS Data Signal+ Rin3+	
13	VSS	Ground	
14	CIKIN-	LVDS Clock Signal - CIKIN-	
15	CIKIN+	LVDS Clock Signal+ CIKIN+	
16	GND	Ground	
17	Rin4-	LVDS Data Signal – Rin4-	
18	Rin4+	LVDS Data Signal+ Rin4+	
19	VSS	Ground	
20	NC	Not connect	


## Preliminary

The contents of this document are confidential and must not be disclosed wholly or in part to any third part without the prior written consent of AMPIRE CO., LTD

Note1\* :

(REV=Low)(The display image is from Top to Bottom and Left to Right)

(REV=High)(The display image is from Bottom to Top and Right to Left)

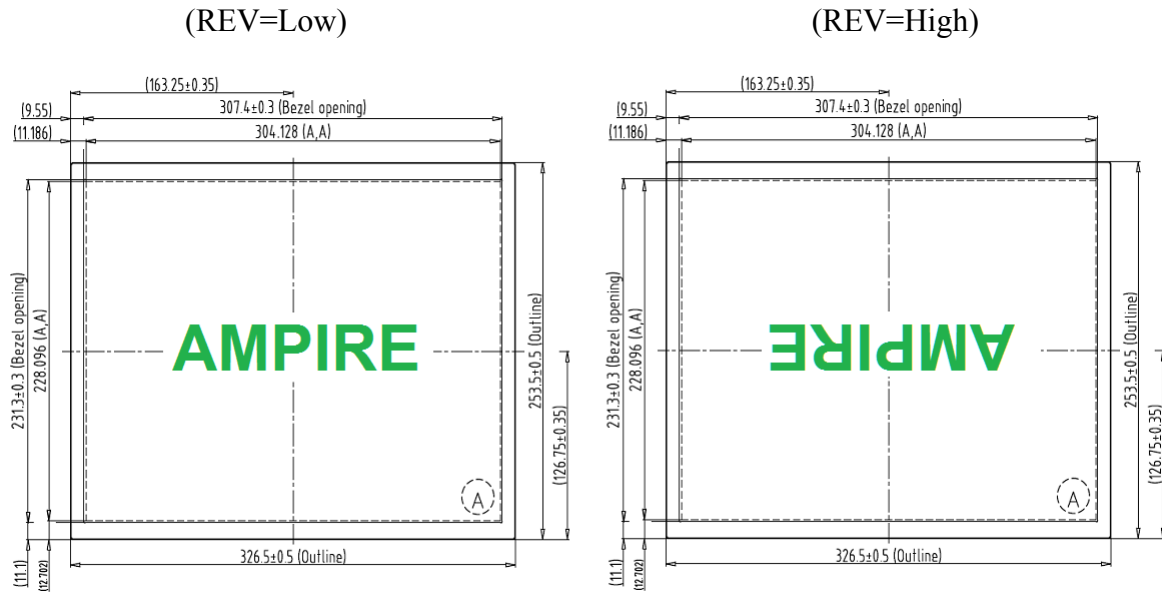


### CN4(Input signal): FPHTI-104TTW000

Pin No.	Symbol	Description	Note
1	VIN	12V Power	
2	LED_EN	Function selection:5V-Backlight ON , GND-Backlight OFF	
3	GND	Ground	
4	PWN	Adjust for LED brightness	

## Preliminary

The contents of this document are confidential and must not be disclosed wholly or in part to any third part without the prior written consent of AMPIRE CO., LTD

## 8. Power On/Off Sequence

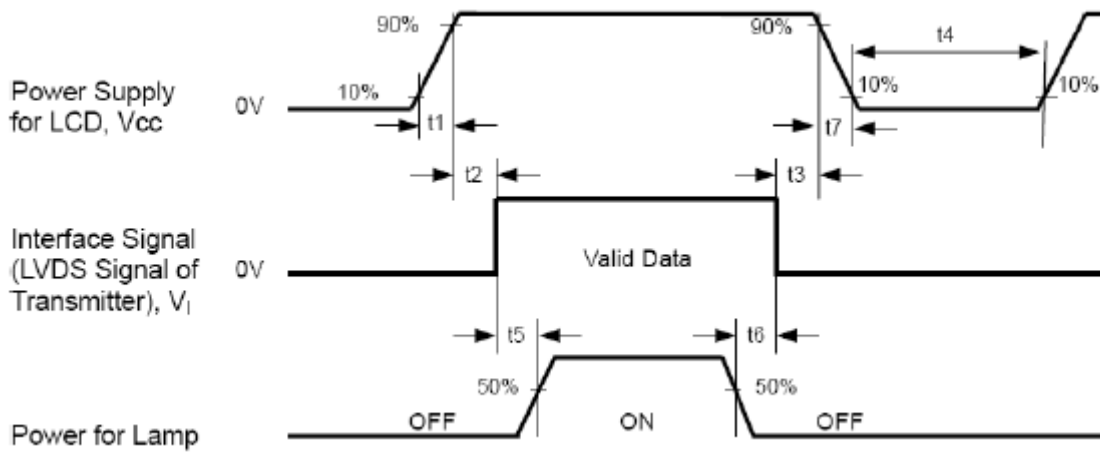

Parameter	Symbol	Unit	min	typ	max
VDD Rise Time	T1	ms	0.02	-	10
VDD Good to Signal Valid	T2	ms	0	-	20
Signal Disable to Power Down	T3	ms	0	-	1000
Power Off	T4	ms	1000	-	
Signal Valid to Backlight On	T5	ms	300	-	
Backlight Off to Signal Disable	T6	ms	200	-	
VDD Fall Time	T7	ms	0	-	100

**Preliminary**

The contents of this document are confidential and must not be disclosed wholly or in part to any third part without the prior written consent of AMPIRE CO., LTD

---

**9. RELIABILITY TEST CONDITIONS**

Test Item	Test Conditions	Note
High Temperature Operation	80±3°C , Dry t=240 hrs	
Low Temperature Operation	-30±3°C , Dry t=240 hrs	
High Temperature Storage	80±3°C , Dry t=240 hrs	1,2
Low Temperature Storage	-30±3°C , Dry t=240 hrs	1,2
Storage at High Temperature and Humidity	60°C, 90% RH , 240 hrs	1,2
Thermal Shock Test	-20°C (30min) ~ 70°C (30min) 100 cycles	1,2
Vibration Test (Packing)	Sweep frequency : 10 ~ 55 ~ 10 Hz/1min Amplitude : 0.75mm Test direction : X.Y.Z/3 axis Duration : 30min/each axis	2

Note 1 : Condensation of water is not permitted on the module.

Note 2 : The module should be inspected after 1 hour storage in normal conditions (15-35°C , 45-65%RH).



## **10. HANDLING & CAUTIONS**

### **10.1 Cautions when taking out the module**

Pick the pouch only, when taking out module from a shipping package.

### **10.2 Cautions for handling the module**

10.2.1 As the electrostatic discharges may break the LCD module, handle the LCD module with care. Peel a protection sheet off from the LCD panel surface as slowly as possible.

10.2.2 As the LCD panel and backlight element are made from fragile glass material, impulse and pressure to the LCD module should be avoided.

10.2.3 As the surface of the polarizer is very soft and easily scratched, use a soft dry cloth without chemicals for cleaning.

10.2.4 Do not pull the interface connector in or out while the LCD module is operating.

10.2.5 Put the module display side down on a flat horizontal plane.

10.2.6 Handle connectors and cables with care.

### **10.3 Cautions for the operation**

10.3.1 When the module is operating, do not lose MCLK, DE signals. If any one of these signals were lost, the LCD panel would be damaged.

10.3.2 Obey the supply voltage sequence. If wrong sequence were applied, the module would be damaged.

### **10.4 Cautions for the atmosphere**

10.4.1 Dewdrop atmosphere should be avoided.

10.4.2 Do not store and/or operate the LCD module in a high temperature and/or humidity atmosphere. Storage in an electro-conductive polymer-packing pouch and under relatively low temperature atmosphere is recommended.

### **10.5 Cautions for the module characteristics**

10.5.1 Do not apply fixed pattern data signal to the LCD module at product aging.

10.5.2 Applying fixed pattern for a long time may cause image sticking.

### **10.6 Other cautions**

10.6.1 Do not disassemble and/or re-assemble LCD module.

10.6.2 Do not re-adjust variable resistor or switch etc.

10.6.3 When returning the module for repair or etc, please pack the module not to be broken. We recommend using the original shipping packages.

10.6.4 AMIPRE will provide one year warrantee for all products and three months warrantee for all repairing products.

10.6.5 Do not keep the LCD at the same display pattern continually. The residual image will happen and it will damage the LCD. Please use screen saver.

**Preliminary**

The contents of this document are confidential and must not be disclosed wholly or in part to any third part without the prior written consent of AMPIRE CO., LTD

**11. OUTLINE DIMENSION**

