

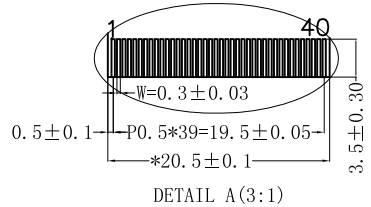
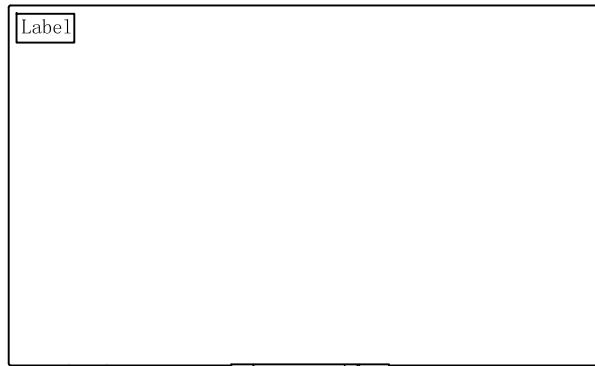
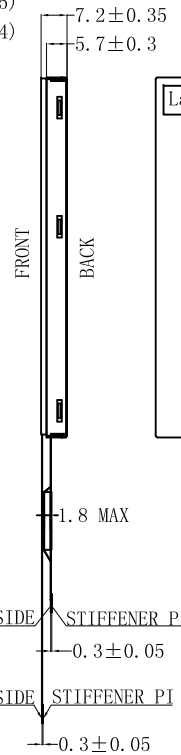


CUSTOMER P/N:

Rev.	DATA	NOTES
V1.0	2020.02.10	New issue

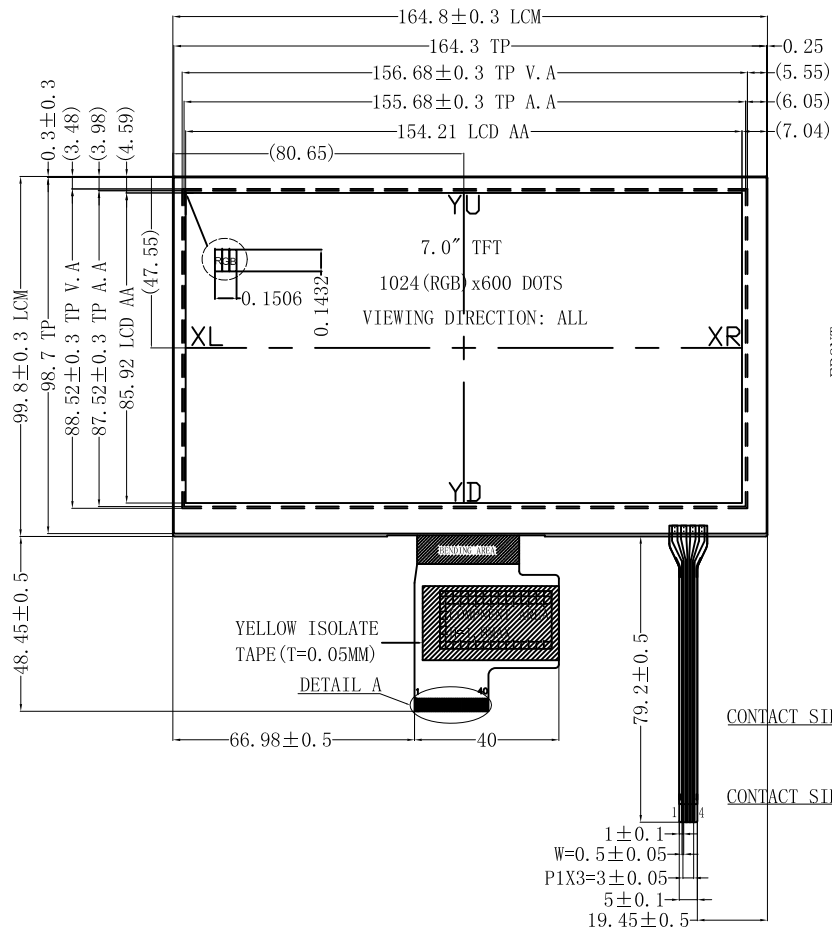

40 PIN FOR LCM

PIN	SYMBOL	PIN	SYMBOL
1	NC	21	RXIN3+
2	VDD-LCM	22	GND
3	VDD-LCM	23	NC
4	NC	24	NC
5	RESET	25	GND
6	STBYB	26	NC
7	GND	27	DIMO
8	RXIN0-	28	SELB (HSD)
9	RXIN0+	29	NC
10	GND	30	GND
11	RXIN1-	31	LED-
12	RXIN1+	32	LED-
13	GND	33	L/R
14	RXIN2-	34	U/D
15	RXIN2+	35	NC
16	GND	36	NC
17	RXCLKIN-	37	NC
18	RXCLKIN+	38	NC
19	GND	39	LED+
20	RXIN3-	40	LED+

PIN	SYMBOL
1	XL
2	YD
3	XR
4	YU

- NOTES:
 1.DISPLAY TYPE: 7.0" TFT
 2.DISPLAY MODE: Transmissive, Normally black
 3.VIEW DIRECTION: ALL
 4.OPERATION TEMPERATURE: -20°C~+70°C
 STORAGE TEMPERATURE: -30°C~+80°C
 5.DRIVER IC: HX8282A11/HX8696A
 6.GENERAL TOLERANCE: ±0.2
 7.REQUIREMENT ON ENVIRONMENT PROTECTION: ROHS

Customer Approval	Drawn:	Lucien	DLC Display Co., Ltd			
	Checked:					
	Approved:		Title	TFT LCM OUTLINE	Unit	mm
	Critical Dim.	<input type="checkbox"/>	Part No.	DLC0700XDP30LF-R-1	Scale	1:1
	Reference Dim.	< >	Revison	V1.0	Page	1/1
		Date	2020-02-10	3 rd Angle		