
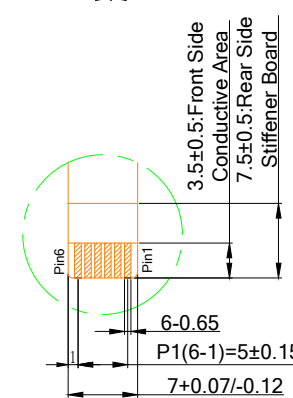
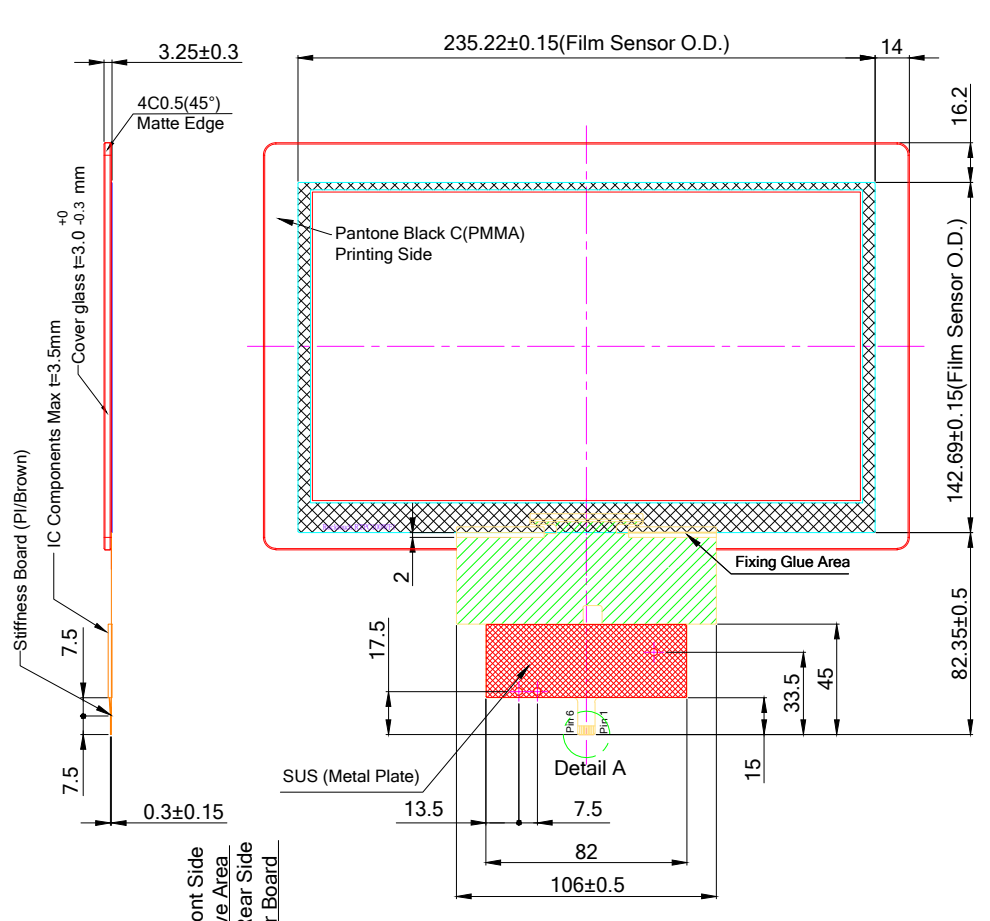


Front VIEW

Back VIEW

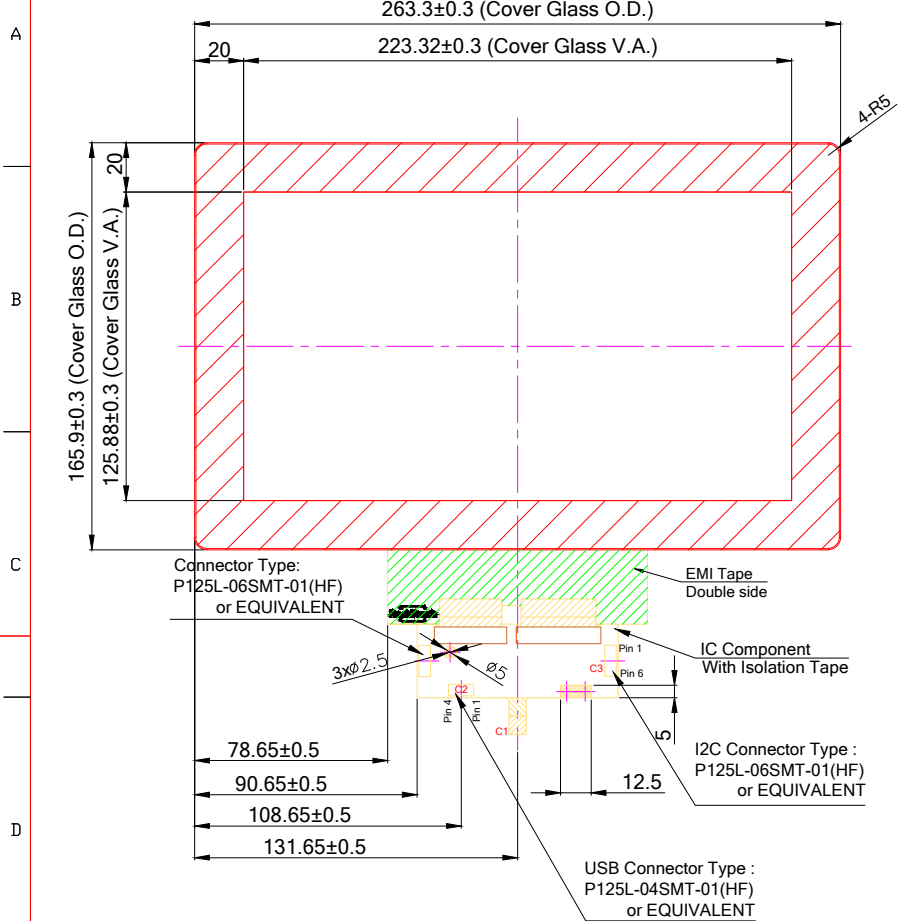

- Spec:
- General O.D. Tolerance : ±0.3
 - Border Type : Matte
 - Glass Type : Semi-Tempered
 - Surface Treatment : None
 - Background Printing : PMMA Color 1 : Pantone Black C
 - Logo Printing : None
 - Transmittance Level : >85%
 - Important Notes :

- Note:
- Distance between LCD and Touch need to have minimum 1 mm otherwise thinner dimension can cause noise problem between LCD and touch screen
 - If customer put a front conductive bezel all around we need to have minimum thickness of 2mm, if the thickness is lower can cause interference
 - Refer to the integration guide to avoid any integration noise issue
 - Before mass production customer needs to ask custom firmware for his final machine

| C1:USB Interface | | C2: Pin Define for USB 4 pin | | C3: Pin Define for I2C 6 pin | |
|------------------|---------|------------------------------|-----|------------------------------|---------|
| Pin 01 | GND | Pin 01 | GND | Pin 01 | GND |
| Pin 02 | D- | Pin 02 | D- | Pin 02 | SDA |
| Pin 03 | D+ | Pin 03 | D+ | Pin 03 | SCL |
| Pin 04 | VDD(5V) | Pin 04 | VDD | Pin 04 | VDD(5V) |
| Pin 05 | NC | | | Pin 05 | INT |
| Pin 06 | RST | | | Pin 06 | RST |

| | | | | | |
|-------------------|-----|-------------|-----------|-----------------------|-------------|
| Customer Approval | | Part Number | | RTPC100WF1-R1-30BP1-C | |
| Date | Rev | Date | Person | Description | |
| Company | | | | | |
| Name | | | | | |
| Signature | | Date | Design By | Date | Check By |
| | | 20180724 | Rick | 20180802 | Kevin |
| | | | | Date | Approved By |
| | | | | 20180806 | Jeff |

