

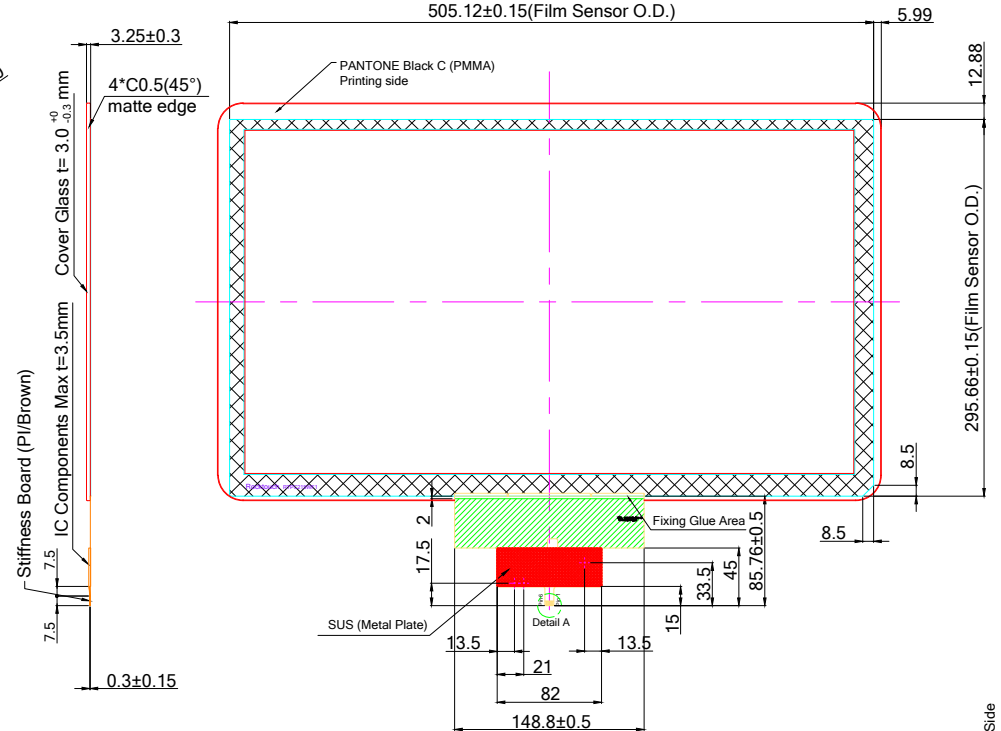


Front VIEW

Back VIEW

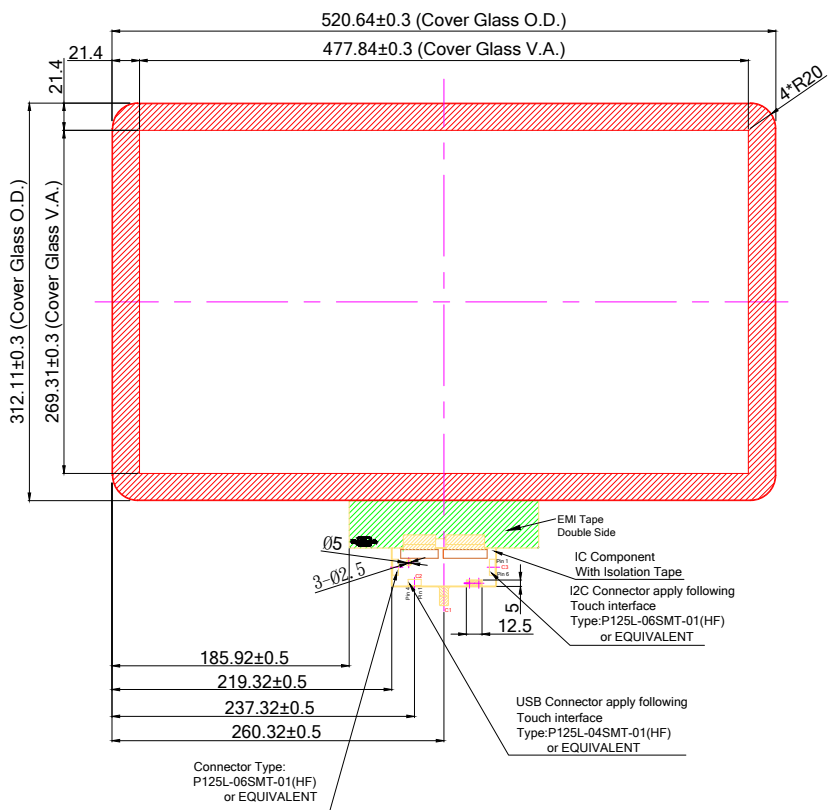

C1: USB		C2: USB Connectr 4 pin		C3: I2C Connectr 6 pin	
Pin 01	XGND	Pin 01	GND	Pin 01	XGND
Pin 02	D-	Pin 02	D-	Pin 02	SDA
Pin 03	D+	Pin 03	D+	Pin 03	SCL
Pin 04	VDD(5V)	Pin 04	VDD	Pin 04	VDD(5V)
Pin 05	NC			Pin 05	INT
Pin 06	RSTN			Pin 06	RSTN

- Spec:
- General O.D. Tolerance : ±0.3
 - Border Type : Matt
 - Glass Type : Semi-Tempered
 - Surface treatment : None
 - Background Printing : PMMA Color 1 : Pantone Black C
 - Logo Printing : None
 - Transmittance Level : >85%
 - Important Notes :

Note:

A. Distance between LCD and Touch must be at least 1 mm otherwise touch will not work correctly
 B. If customer put a front cover lens all around he need to use at least 2 mm Thick gasket between touch and metal frame
 C. refer to the integration guide to avoid any integration noise issue
 D. before mass production customer must provide machine for final firmware tuning, or we must test in remote and tune final firmware

Customer Approval		Part Number		RTPC215WF1-R1-30001-C	
Date		Rev.	Date	Person	Description
Company		v5	20190408	Kevin	Update Touch Interface in Note
Name		v4	20190329	Jeff	Modify Cover Glass Round Corner & Film Corner Design
Signature			Date	Design By	Date
			20180612	Jeff	Check By
					Date
					Approved By

