
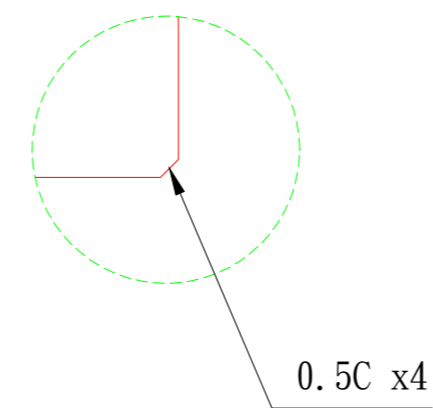
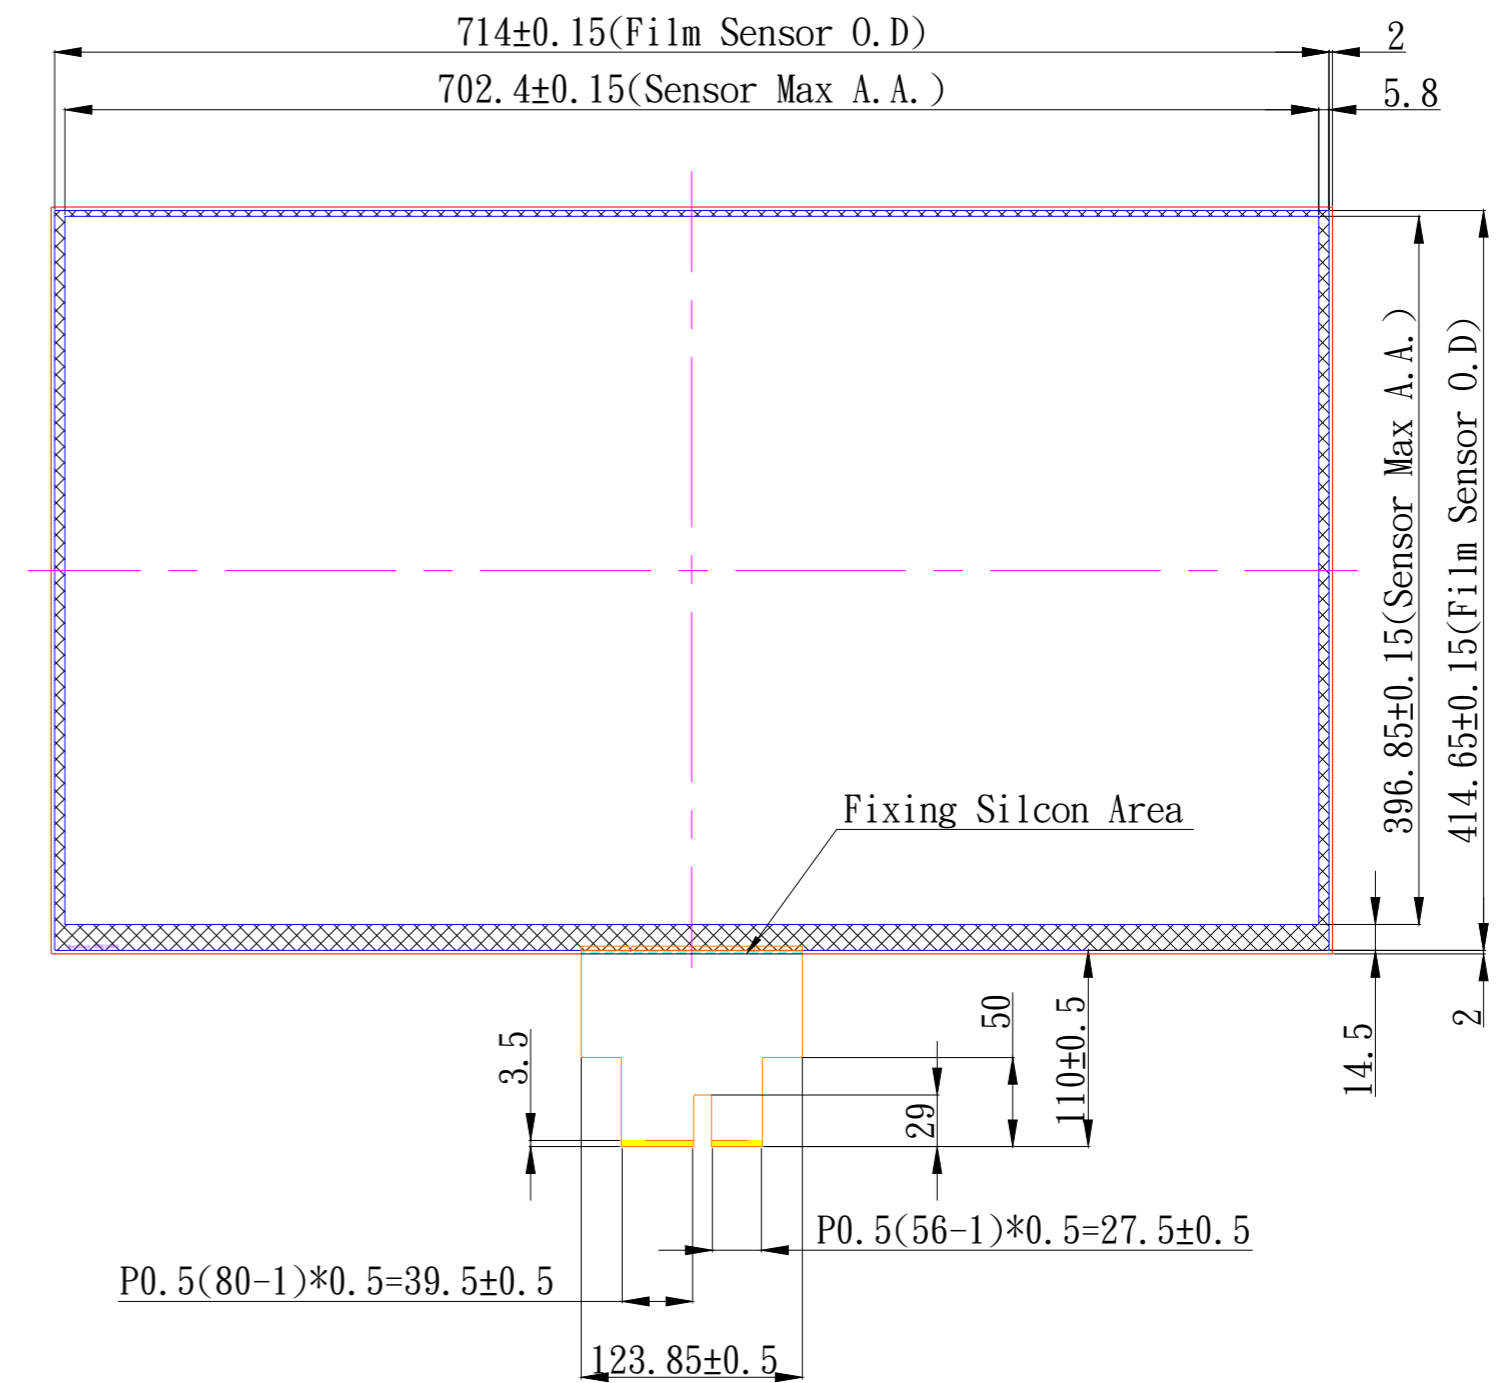
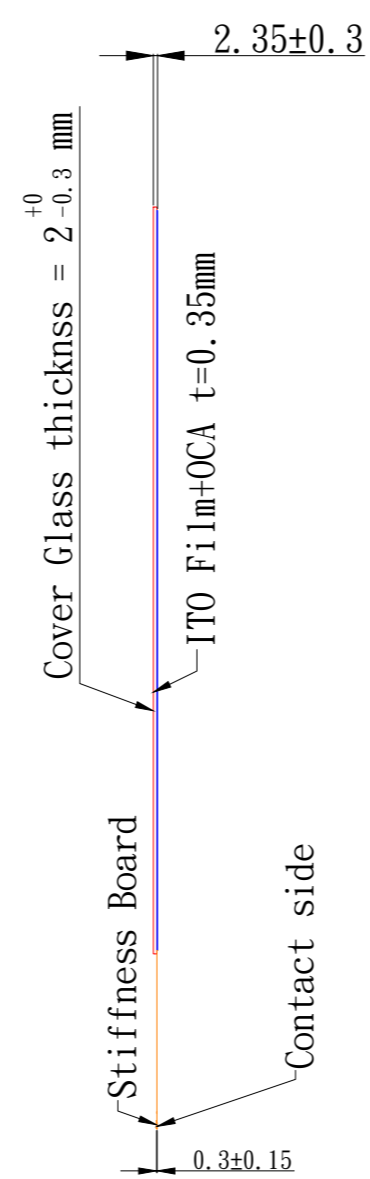


Front VIEW

Back VIEW

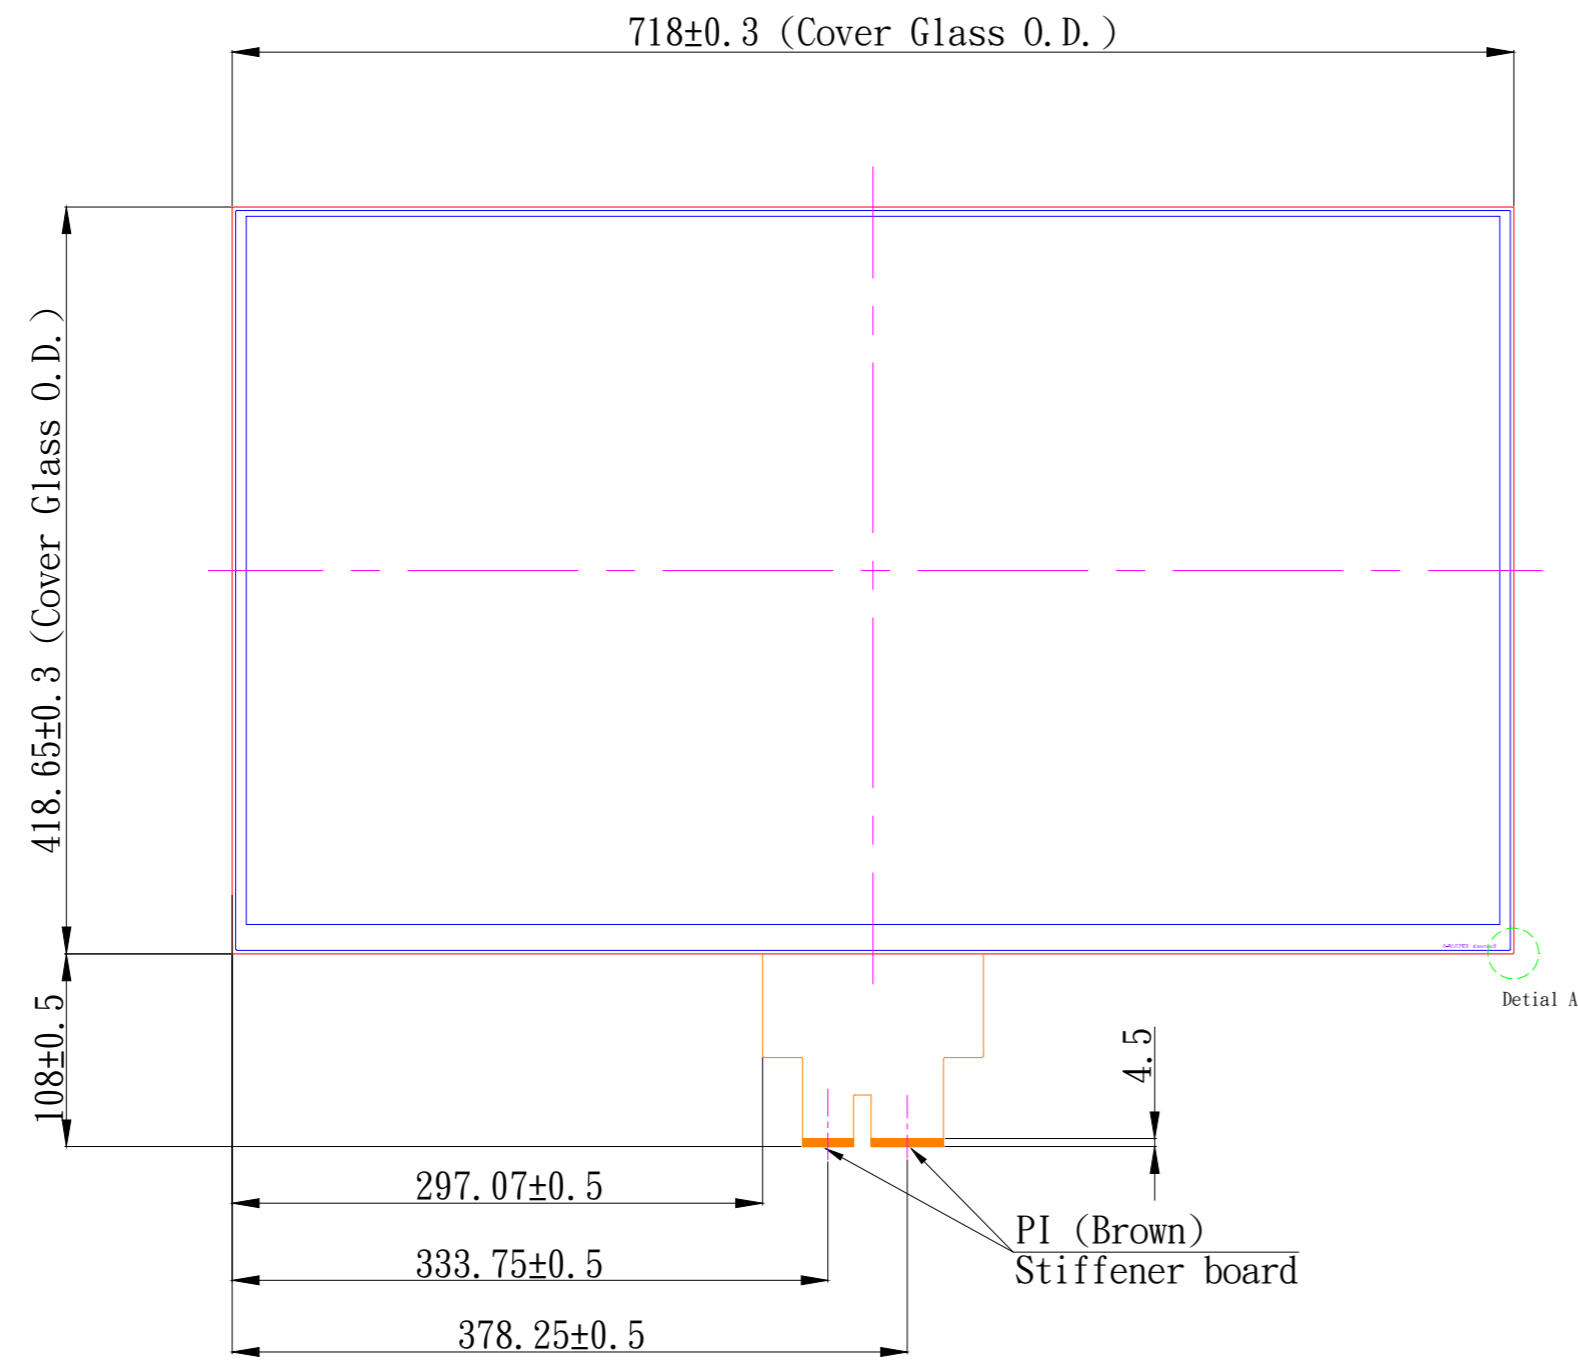


Detail A

Note:

1. Tolerance: $\pm 0.3\text{mm}$
2. Finger input only or special conductive pen
3. Surface Hardness: 6H (Chemical Strength Glass)
4. Transmittance: $>85\%$ (JIS-K7105)
5. Surface Treatment: none
6. Distance between LCD and touch panel need to be minimum 1.0mm otherwise touch maybe will not work correctly
7. If customer put a front cover all around need use at least 2mm thick gasket between touch and metal frame
8. USB max ripple acceptable is 50mV, in other case touch will not work correctly
9. Referring to the integration guide to avoid any integration noise issue

圖號 RTPC315W-S18TG1



2015/05/06	Matt	設計	審查	變更	內容	Modify the part number and FPC O.D.
設計	2015/05/01	Candy	審查	Kevin	承認	



日期
原圖
管元