


1	Operating Voltage:	5.0V
2	Drive method:	1/16 duty, 1/4 bus
3	Viewing Direction:	6:00
4	Operating Temp:	-20°~70°C
5	Storage Temp:	-30°~80°C
6	Display type:	SPN, Negative, Transmissive
7	Unspecified tolerance:	±0.2
8	LCD controller/driver:	ST7068U-0A-BB, ST7065
9	Backlight:	LED/W
10	Customer No.:	
11	Dimensions with mark** are important	
12	RoHS compliant	

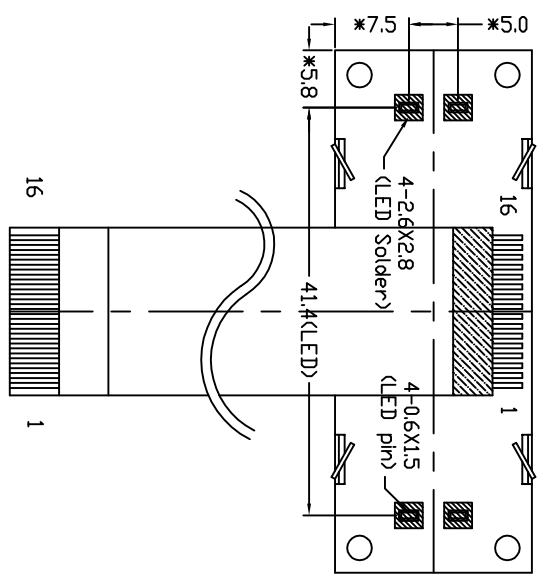

NO.	DESCRIPTION	NAME	DATE			
1				No. YMS162-36AIFBDCL	Ver. 1	Draw
2						Chk
3						App
4	Initial version modify the IC based on YMS162-21AICBDCL	Jiang Xiaona	2018-03-14			Unit:mm