

EPC-R3720

NXP i.MX8M Plus Cortex®-A53 Edge AI RISC-based Box Computer

NEW



Features

- NXP i.MX8M Plus Cortex®-A53 Quad Core 1.6GHz
- On-board LPDDR4 6 GB, 4000MT/s memory
- HDMI up to 3840 x 2160 at 30Hz resolution
- Dual GbE LAN, 1 USB2.0 and 1 USB3.2 Gen 1
- 1 Micro SD Socket & 1 Nano SIM Slot
- 1 mini-PCIe for 3G/4G, 1 M.2 2230 Key E Slot
- Yocto Linux and Android
- 4 Kinds of Rear I/O for Each Vertical Focus: IEM, Self Service, Automation and Networking




Specifications

| | | | | | |
|------------------|--|--|--|-------------------------------------|--------------------|
| Model | | EPC-R3720IQ-ALA200 | EPC-R3720IQ-ALA220 | EPC-R3720IQ-ALA240 | EPC-R3720IQ-ALA260 |
| Processor System | CPU | NXP i.MX8M Plus Cortex®-A53 Quad 1.6 GHz | | | |
| | Technology | LPDDR4 | | | |
| Memory | Capacity | 6 GB On-board | | | |
| | Flash | 16 GB On-board eMMC Flash for OS and 8 MB QSPI NOR Flash for board information | | | |
| Graphics | HDMI | 1 x HDMI 2.0a, up to 3840 x 2160 at 30Hz | | | |
| | Graphics Engine | GC7000UL with 2D/3D Graphic Acceleration supporting 1G Pixel/s, OpenVG 1.1, Open GL ES3.1, Vulkan and open CL 1.2 FP | | | |
| | H/W Video Codec | Decoder: 1080p60 HEVC/H.265 Main, VP9 Profile 0/2, VP8, AVC/H.264 Baseline/Main/High Encoder: 1080p60 AVC/H.264, HEVC/H.265 | | | |
| Ethernet | Chipset | NXP i.MX8M Plus integrated RGMII | | | |
| | Speed | 2 10/100/1000 Mbps | | | |
| Watchdog Timer | Watchdog Timer | 1~6553s, power on/off 4s | | | |
| Front I/O | USB | 1 x USB3.2 Gen 1 Type A, 1 x USB 2.0 Type A | | | |
| | GbE | 2 x RJ45 for GbE | | | |
| COM/CAN | | 1 x DB9 for RS-232/422/485 and 1 x CAN-FD | | | |
| Rear I/O | UIO-4030 | UIO-4032 | UIO-4034 | UIO-4036 | |
| | 1 x RS-485, 1 x 2 wires RS-232 4 x DIs, 4 x DOs | 2 x 2 wires RS-232 1 x GbE, 2 x USB 2.0 | 2 x 2 wires RS-232 1 x CAN Bus 2.0B | 2 x 2 wires RS-232 4 x GbE (Hub) | |
| Expansion | Full-Size Mini PCIe | 1 Full Size Mini-PCIe Slot (USB Signal Only) | | | |
| | M.2 Micro | 1 M.2 2230 Key E Slot (USB/PCIe/SDIO/UART/I2S) | | | |
| | SD Socket | 1 Micro SD Socket | | | |
| | SIM | 1 Nano SIM Slot | | | |
| | Antenna Holes | 4 | | | |
| Power | Power Supply Voltage | +12V | | | |
| | Power Type | Lockable DC-Jack | | | |
| | Power Consumption | 9.2W | | | |
| Environment | Operating Temperature | -40 ~ 70 °C | | | |
| | Operating Humidity | 5% ~ 95% relative humidity, non-condensing | | | |
| Mechanical | Dimensions | 174 x 108 x 25 mm | | | |
| | Mounting | Wall mount, DIN Rail mount | | | |
| | Weight | 750g | | | |
| Operating System | Linux | Yocto | | | |
| | Android | Android | | | |
| Certifications | | CE/FCC Class B/CCC/BSMI | | | |

Dimensions

Unit: mm

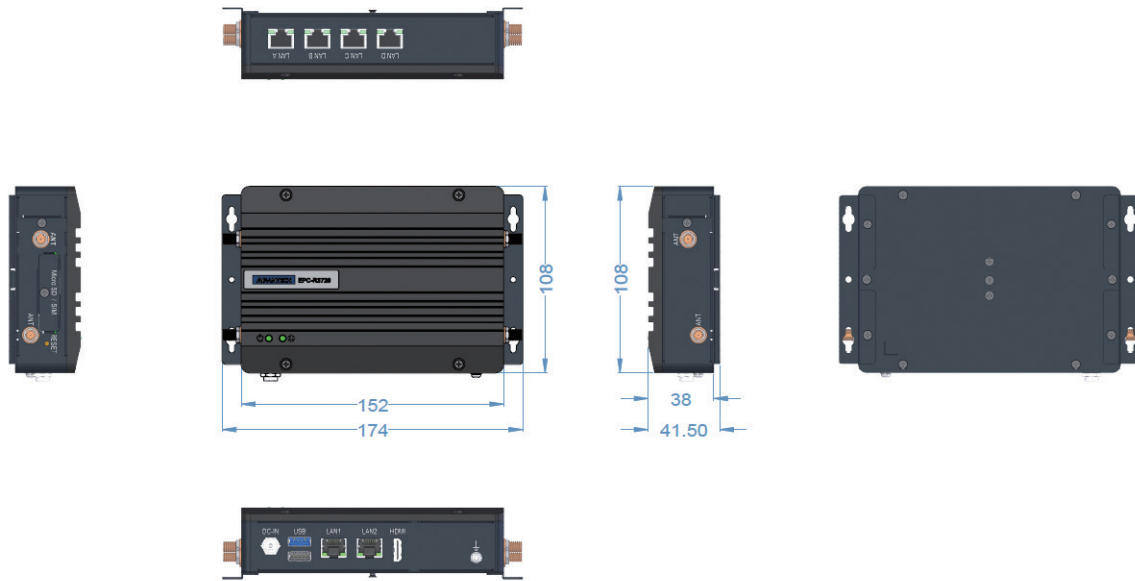

Ordering Information

| Part Number | CPU | Memory | Flash | HDMI | LAN | USB | DI/DO | Serial Port | Micro SD | Nano SIM | CAN | I/O Exp. | Operating Temperature |
|--|--------------|--------|------------------|------|------------------------------------|-----|-------|--------------------|----------|----------|---|----------|-----------------------|
| EPC-R3720IQ-ALA200 EPC-R3720IQ-ALA10B (BSMI*) | Quad 1.6 GHz | 6 GB | 16 GB, Yocto 3.0 | 1 | 2 | 2 | 4/4 | 1 RS-232, 1 RS-485 | 1 | 1 | 1 | UIO-4030 | -40 ~ 70 °C** |
| EPC-R3720IQ-ALA220 EPC-R3720IQ-ALA12B (BSMI*) | Quad 1.6 GHz | 6 GB | 16 GB, Yocto 3.0 | 1 | 3 | 4 | - | 2 RS-232 | 1 | 1 | 1 | UIO-4032 | -40 ~ 70 °C** |
| EPC-R3720IQ-ALA240 EPC-R3720IQ-ALA14B (BSMI*) | Quad 1.6 GHz | 6 GB | 16 GB, Yocto 3.0 | 1 | 2 | 2 | - | 2 RS-232 | 1 | 1 | 2 (CAN-FD on front I/O, CANbus on rear I/O) | UIO-4034 | -40 ~ 70 °C** |
| EPC-R3720IQ-ALA260 EPC-R3720IQ-ALA16B (BSMI*) | Quad 1.6 GHz | 6 GB | 16 GB, Yocto 3.0 | 1 | 6 (2 as independent, and 4 by hub) | 2 | - | - | 1 | 1 | 1 | UIO-4036 | -40 ~ 70 °C** |

*BSMI SKU is for sale in Taiwan only
**BSMI SKU supports only -40~60°C

Packing List


| Part Number | Description |
|----------------|----------------|
| EPC-R3700-DR01 | Wall Mount BKT |

Optional Accessories

| Part Number | Description |
|------------------|--|
| 96PSA-A36W12W7-5 | ADP A/D 100-240V 36W 12V C6 LOCK DC JACK 62368 |
| 1700001524 | Power Cord 3P UL 10A 125V 180cm |
| 170203183C | Power Cord 3P Europe (WS-010+WS-083) 183cm |
| 170203180A | Power Cord 3P UK 2.5A/3A 250V 1.83M |
| 1700008921 | Power Cord 3P PSE 183cm |
| 1700019146 | Power Cord CCC 3P 2.5A 250V 183cm |
| 1700033212-01 | Y Cable for CAN & RS-232 Debug |
| AIW-154BN | 802.11ac+BT5.0 NXP 88W8997 M.2 2230 PCIe+UART |
| 1750008717-01 | Dipole Ant. D.B 2.4/5G WIFI 3dBi SMA/M-R BLK |
| 1750007965-01 | Antenna Cable R/P SMA (M) to MHF4, 300mm |
| AIW-344FQ-*01 | AIW-3 series LTE CAT4 mini PCI-e module |
| 1750008303-01 | Antenna 4G/LTE Antenna L=13 cm |
| 1750006009 | Antenna Cable SMA (F) to MHF 1.32 25cm |

*Please contact us for suggesting suitable cellular module for your region

Front I/O

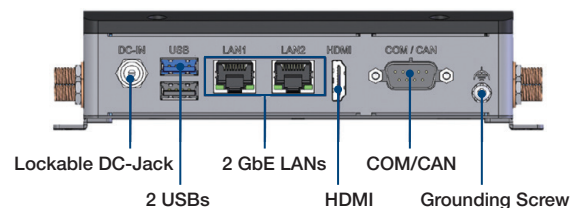

Embedded Linux Support and Design-in Services

Hardware Certified Ubuntu and Yocto with Eco Partner Services

Linux is the most popular embedded OS for transportation, outdoor services, factory automation, and mission critical applications. Its open source and kernel reliability features ease security updates, and make it particularly adaptable to new AI and Edge computing technology. Advantech has cooperated with Canonical and other software partners to provide hardware certified Ubuntu image and Yocto BSP as Linux offerings. The Advantech, Embedded Linux, and Android Alliance (ELAA) delivers local software services and consultation.



Features

| | | | |
|---|---|---|--|
| Certified OS and BSP <ul style="list-style-type: none"> Platform compatibility tests Preloaded functional driver and software stacks | Licensed Services <ul style="list-style-type: none"> License authorized Canonical delivers 10-years of bug fixes and security updates In-house bundled service | Numerous AI and Edge Resources <ul style="list-style-type: none"> Containerized technology for service provision and deployment AI resources from Caffe, TensorFlow, and mxnet | Local Partner Alliance <ul style="list-style-type: none"> Embedded Linux and Android Alliance (ELAA) |
|---|---|---|--|

WISE-DeviceOn

Massive IoT Device Management Utility

IoT deployment and management typically involves numerous disparate devices installed on multiple sites. These devices require effective monitoring, managing, and tracking. Advantech's easy-to-use WISE-DeviceOn interface enables users to remotely monitor device health, troubleshoot problems, and send software/firmware updates over-the-air (OTA). In sum, DeviceOn empowers quick real-time responsiveness to emerging problems.



Features

| Comprehensive Management | Remote Access | Efficient Operations |
|--|--|--|
| <ul style="list-style-type: none">• Devices status• Peripherals/firmware• Open for extension | <ul style="list-style-type: none">• Real-time monitoring• Remote controls• Troubleshooting | <ul style="list-style-type: none">• Zero-touch on-boarding• OTA updates• Batch control |

Product Highlights



SOM-6883

High-performance 11th Gen Intel[®] COMe Type 6 Module



MIO-5375

Compact 11th Gen Intel[®] Outdoor Focused 3.5" SBC



EPC-B5587

10th Gen Intel[®] Xeon[®] based Edge server



EPC-R3220

Arm based IoT Edge Gateway