

Movidius Smart Camera


S5501MG000E

Product Features

- Global shutter, CMOS series products;
- 512MB RAM and 512MB non-flashable memory;
- Support Software Trigger/Hardware Trigger/Free Run Mode;
- GigE industrial Ethernet interface;
- Abundant I/O interfaces, RS232, isolated input & output;
- Support C-mount lens and M12 lens;
- Industrial grade M12 connector, IP67 protection;
- Support DC8V~26V wide voltage power supply, adapt to industrial DC12V/24V voltage environments;
- Abundant code reading types, Code128 /EAN, DM/QR, etc.;



Dimensions (mm)

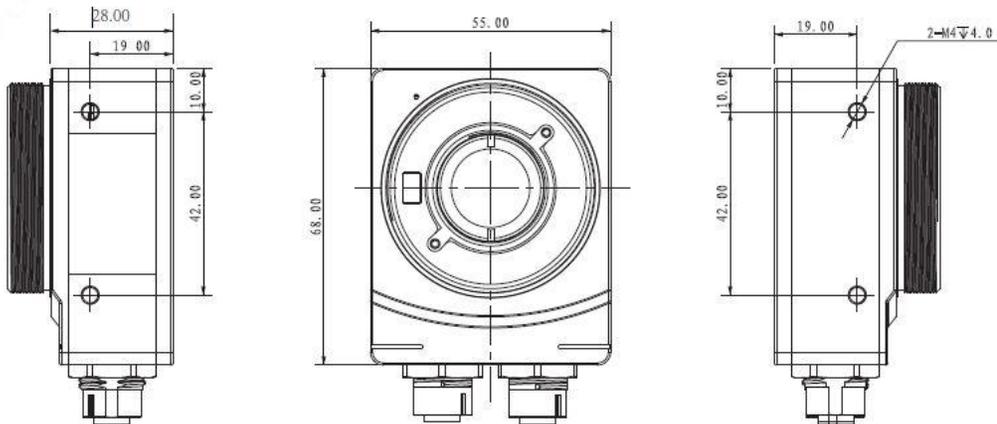

Technical Specifications

Model Name	S5501MG000E
Sensor Type	CMOS
Sensor Size	1/3.6"
Shutter	Global
Resolution	800 x 600
Frame Rate	60 fps
Mono/Color	Mono
Pixel Size	4.8 x 4.8
Function	Abundant code reading types (Code128/Code39/Code93/EAN etc.; QR/DM/Vericode etc.)
Ethernet	Code-A, GigE
Exposure Time	5 μ S~1S
Sync Mode	Software Trigger/Hardware Trigger/Free Run Mode
LED Indicator	Power, Network, Trigger
Communication Protocol	SDK, Serial, TCPServer, TCPClient, Profinet, Modbus TCP
GPIO	12-pin I/O interface, RS232, 1x Opto-isolated input, 3x Opto-isolated output
Lens Mount	Industrial M12 x 2
Power Supply	DC 8V~26V wide voltage input, adapt to industrial DC12V/24V voltage environments
Power Consumption	4.0W
Product Dimensions	68mm x 55mm x 28mm (Non including lens mount and rear case connector)
Weight	200g
Temperature	Storage: - 30°C~+80°C; Operation: - 30°C~+50°C
Operating Humidity	20% ~ 95%, No condensing (with the proper lens cover installed correctly)

© 2021 IRAYPLE. All rights reserved. Design and specifications are subject to change without notice.

Pictures in the document are for reference only, and the actual product shall prevail.