## LPF40 LED Pin Fin Heatsink ø 40mm



- Designed for high-performance convection cooling of power LEDs, COB modules and LED engines
- Thermal resistance range Rth 6.9 9.3°C/W Cooling performance up to 9.73W (see thermal details)
- Diameter 40mm base
- Standard heights 30 40 50 mm Overall height can be customized from 10 to 60 mm
- Standard base thickness 5 mm Other base thicknesses on request Easy base plate customisation with mounting holes, cable guidance, reflector mounting options,...
- Forged from highly conductive aluminum with 68 round pins for maximum cooling surface Better performance under tilted positions compared to extruded LED heat sinks
- Standard colors clear anodised black anodised

### **Order Information**

#### **Thermal Interface Material**

Please make sure to apply a high thermal conductive material between the heat sink base and the LED engine with an applied thickness between 0.1mm and 0.2mm

#### **Advised materials:**

- Thermally Conductive Grease High performance, more difficult to apply and control the thickness Example Laird Technologies Tgrease 880
- Thermal Gap Filler Pad with eletrical insulation Medium to high performance, easy to apply Example Laird Technologies Tgard 500-A1
- Phase Change Thermal Interface Material This material applies like a thermal pad but becomes fluid and creates a perfect wetting at the first heating cycle Extra high performance, easy to apply Example Laird Technologies TPCM 585

Not using a suitable thermal conductive material will lead to either an insufficient wetting area or a high thermal resistance between LED engine and heat sink base both immediately resulting in an extra temperature increase of the LED junction We do not advise the use of double sided thermal tapes without using extra mounting screws to create pressure

Thermal gap filler pads and phase change pads can be pre-applied by MechaTronix with specific cutting designs

4 to 6F, No.308, Ba De 1st Rd., Sinsin Dist., Kaohsiung City 80050, Taiwan sales@mechatronix-asia.com www.mechatronix-asia.com www.led-heatsink.com Tel: +886 7 238 2185 Fax: +886 7 238 2187 VAT: 28600841



#### Example: LPF40A30-5-Black



- Mechanical version
- A] Solid base
- B] Center hole ø 11.5mm
- C] 3\*M3 mounting hole
- D] Center hole ø 11mm.5 + 3\*M3 mounting hole
- XX] Customised

2

3

4

- Height (pins+base) (mm) 30, 40 or 50
- Base thickness (mm) 5 or customised
- Color anodising black, or clear customised painting colors on request



## LPF40 LED Pin Fin Heatsink ø 40mm



**Product Details** 

Model n°				
	LPF40A30	LPF40A40	LPF40A50	
Dimension (mm)*1	ø40 x h30	ø40 x h40	ø40 x h50	
Volume (mm <sup>3</sup> )	11623	13760	15896	
Cooling Surface (mm <sup>2</sup> )	13823	18095	22368	
Weight (gr)	31.38	37.15	42.92	
Thermal Resistance (°C/W)*2	9.3	7.6	6.9	
Power Pd (W)*3	5.4	6.6	7.3	
Heat Sink Material	AL1070	AL1070	AL1070	

\*1 3D files are avaliable in ParaSolid, STP and IGS on request

\*2 The thermal resistance Rth is determined with a calibrated heat source of 30mm x 30mm central placed on the heat sink, Tamb 40° and an open environment. Reference data @ heat sink to ambient temperature rise Ths-amb 50°C

The thermal resistance of a LED cooler is not a fix value and will vary with the applied dissipated power Pd

\*3 Dissipated power Pd. Reference data @ heat sink to ambient temperature rise Ths-amb 50°C The maximal dissipated power needs to be verified in function of required case temperature Tc or junction temperature Tj and related to the estimated ambient temperature where the light fixture will be placed Please be aware the dissipated power Pd is not the same as the electrical power Pe of a LED module

To calculate the dissipated power please use the following formula: Pd = Pe x (1-ηL)

Pd - Dissipated power

**Pe - Electrical power** 

 $\eta L$  = Light effciency of the LED module

#### Notes:

- MechaTronix reserves the right to change products or specifications without prior notice.
- Mentioned models are an extraction of full product range.
- For specific mechanical adaptations please contact MechaTronix.


4 to 6F, No.308, Ba De 1st Rd., Sinsin Dist., Kaohsiung City 80050, Taiwan sales@mechatronix-asia.com www.mechatronix-asia.com www.led-heatsink.com Tel: +886 7 238 2185 Fax: +886 7 238 2187 VAT: 28600841



## LPF40 LED Pin Fin Heatsink ø 40mm



### **Drawings & Dimensions**

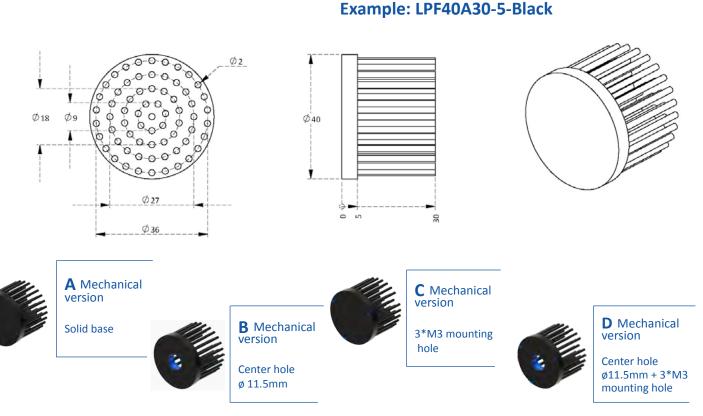

Mechanical version A is the standard model and is kept in stock for fast sample delivery or adaptation to your needs Afterwork on this stock model will be done by CNC what results in non-anodised holes and areas - average lead time for afterwork 2 weeks Mechanical versions B/C/D are for illustration only to show possible mechanical adaptations and are not related to any specific brand or model outline design and mounting pattern - MOQ for these models is 1000pcs from production with lead time 6 weeks Please see also the standard available brand specific LED Pin Fin heat sinks under the related brands

Examples of customised pin fin heat sinks:



4 to 6F, No.308, Ba De 1st Rd., Sinsin Dist., Kaohsiung City 80050, Taiwan sales@mechatronix-asia.com www.mechatronix-asia.com www.led-heatsink.com Tel: +886 7 238 2185 Fax: +886 7 238 2187 VAT: 28600841




## LPF40 LED Pin Fin Heatsink ø 40mm



### **Thermal Data**

Pd = Pe x (1-ηL)		LED Light efficiency, ηL (%)		Heat sink to ambient thermal resistance R <sub>hs-amb</sub> (°C/W)		Heat sink to ambient temperature rise T <sub>hs-amb</sub> (°C/W)					
		17%	20%	25%	LPF40A30- 5-BLACK	LPF40A40- 5-BLACK	LPF40A50- 5-BLACK	LPF40A30- 5-BLACK	LPF40A40- 5-BLACK	LPF40A50- 5-BLACK	
Pd(W)	1	Electrical Power Pe(W)	1.2	1.25	1.33	14	12	11	14	12	11
	3		3.61	3.75	4	11	9.2	8.4	32	28	25
	5		6.02	6.25	6.67	9.5	8.1	7.5	47	41	37
	7		8.43	8.75	9.33	8.7	7.5	6.9	61	52	49
	10		12.05	12.5	13.33	-	6.8	6.4	-	68	64

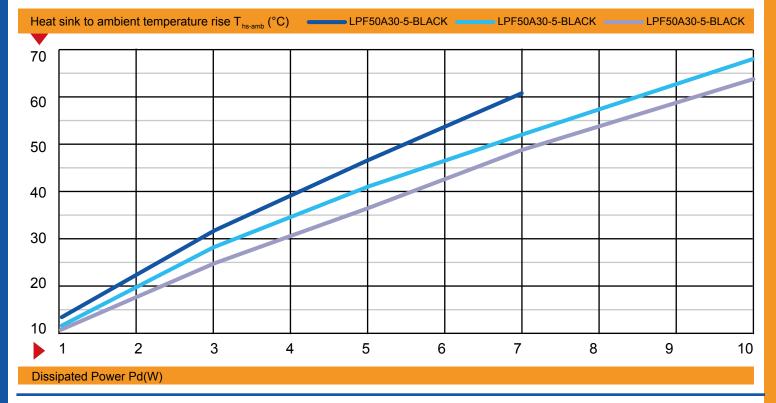

4 to 6F, No.308, Ba De 1st Rd., Sinsin Dist., Kaohsiung City 80050, Taiwan sales@mechatronix-asia.com www.mechatronix-asia.com www.led-heatsink.com Tel: +886 7 238 2185 Fax: +886 7 238 2187 VAT: 28600841

