



# LED POWER SUPPLY DATASHEET

## SSL60-12VF

### DESCRIPTION

Linear type LED drivers, helpful for lightbox, profile or furniture lighting. SELV. Open circuit, short circuit, overload and over temperature protection. Class II, lifetime 30,000hrs. Special design save much space for installation.



### -Input

Items	Conditions	Request	Note
Input voltage	Ta	AC198-264V	--
Input frequency		50/60Hz	--
Input current	25°C, rated input voltage, output with max. rated power	<0.5A	--
Input power		<75W	--
Efficiency		89%	--
Standby		25°C, rated input voltage, output without load	--
Inrush current	25°C, rated input voltage	<70A	peak
PF	25°C, rated input voltage, output max. rated power	0.97	--

### -Temperature and others

Item	Conditions	Request	Note
Operation temp.	--	-20-45°C	--
Relative humidity	--	45%-85%	--
Max. case temp.	--	90°C	--
Lifetime	Max. Ta, rated input voltage, output with max. rated power	30,000hr	--
Working noise	25°C, rated input voltage, output with rated power, mute box background noise <35dB, pickup 10cm distance from products	<35dB	--

### -Protection

Items	Conditions	Request	Note
Open circuit	Ta, rated input voltage, no load	yes	--
Over load	Ta, 0.94-1.06 times of input voltage, 1.6 times of rated power	yes	--
Short circuit	Ta, 0.94-1.06 times of input voltage	yes	--
Over temperature	Ta, 0.94-1.06 times of input voltage, temperature detected point more than 110 degree	yes	--
Over voltage	Ta, 0.94-1.06 times of input voltage, output voltage is 1.5 times of rated one	yes	--
Auto recovery	Over load, short circuit revocation	yes	LED load
Latch off	Over voltage re-start after cut off	--	--

### -Output

Items	Conditions	Request	Note
Startup time	25°C, rated input voltage, output with max. rated power	<0.5s	--
Output voltage and precision	Ta, rated input voltage, output with rated power	12V±5%	--
Output current range	Ta, rated input voltage	0-5.0A	60W
Output voltage wave	25°C, rated input voltage, output with max. rated power	≤380mV	Vp-p
Output overload	25°C, rated input voltage, output with 2 times LED load	yes	--
Output current and precision	Ta, rated input voltage, output with rated power	--	--
Rated output voltage range	Ta, rated input voltage,	--	--
Output current wave	25°C, rated input voltage, output with max. rated power	--	Ip-p
Dimming mode	--	--	--
Dimming range	--	--	--

### -Mechanical, mounting

Items	Conditions
Case material and size	Plastic case
Mounting ways	Independent
Insulation type	Class II
IP grade	IP20
Input cables dimension	H03VVH2-F 2x0.75mm2
Output cables dimension	H03VVH2-F 2x0.75mm2
Output cables length	Max. 2000mm

### -Standard


Items	Conditions
Safety	IEC61347-1, IEC61347-2-13(with light IEC60598)
Harmonic	IEC61000-3-2
EMI	IEC55015
EMS	IEC61547



**SNAPPY**

KNOW HOW. NO LIMITS.

● **Dimensions(mm)**

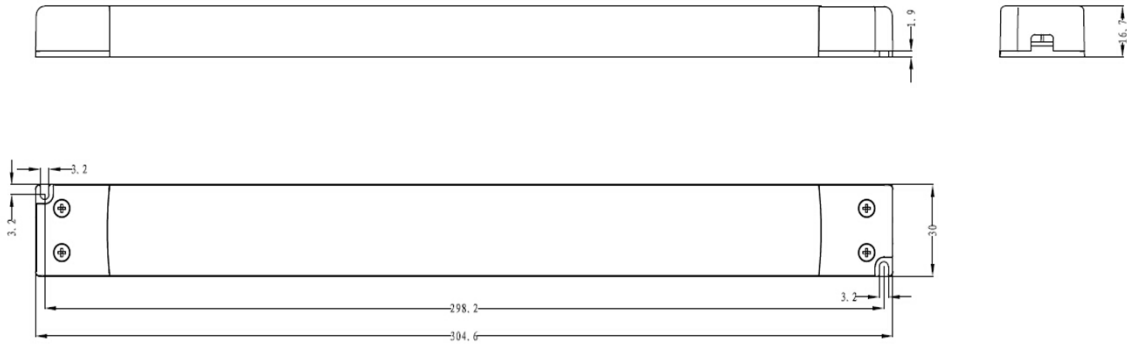

● **Wiring Diagram**

